






THE ROLLUX BOOK

Tejidos para persianas enrollables

THE ROLLUX BOOK

Tejidos para persianas enrollables

Selecciona una colección para ver su contenido

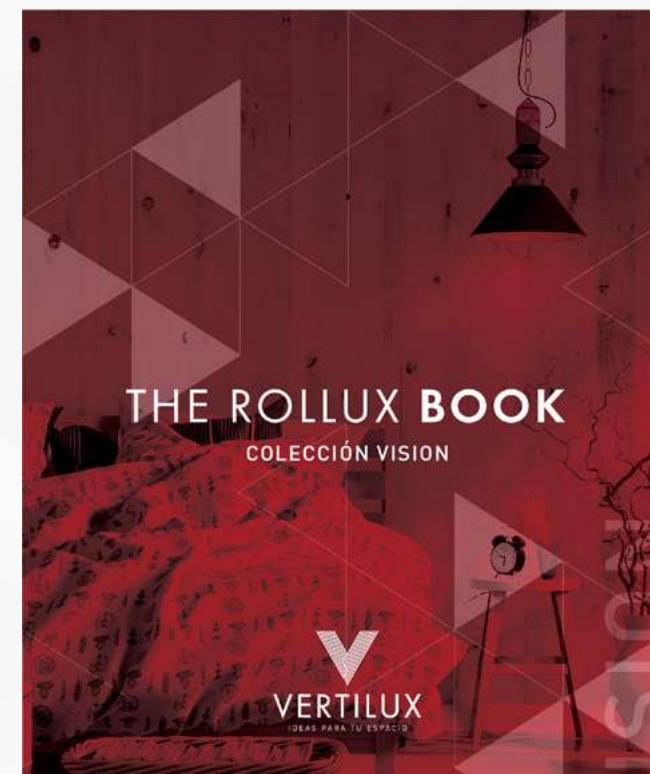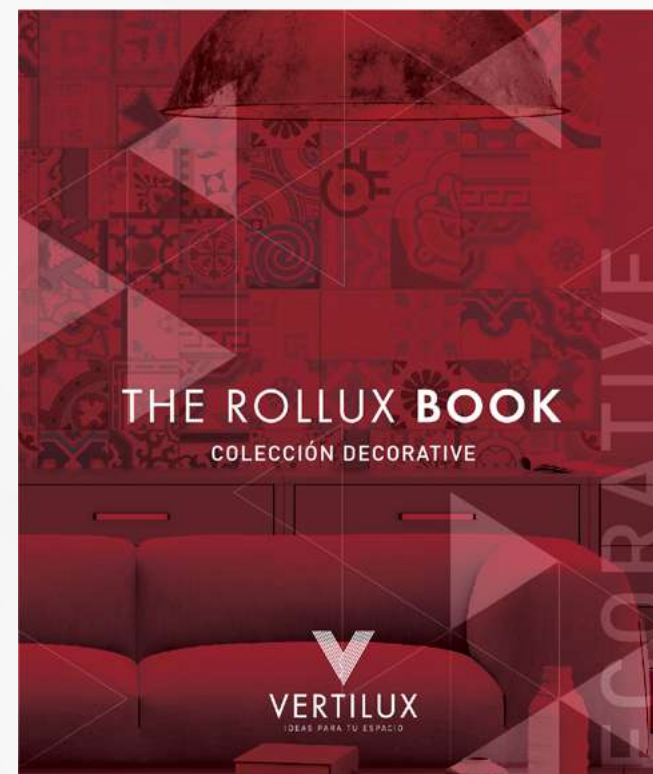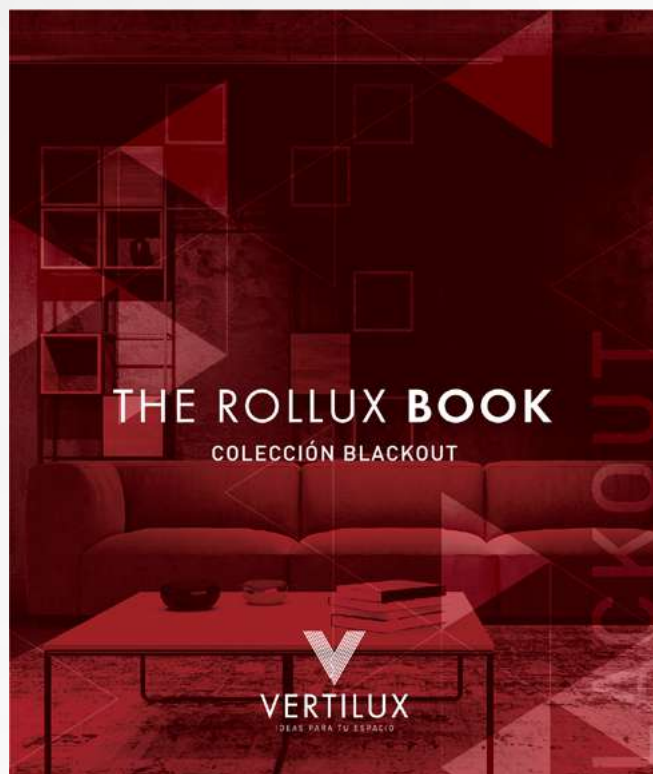

@VertiluxMéxico

Todos nuestros distribuidores trabajan con tejidos, componentes y motores VERTILUX si alguien te ofrece un producto diferente al que deseas o un producto que no es VERTILUX repórtalo, la satisfacción de nuestros clientes es primero.

Copyright © 2021. Todos los derechos reservados.

vertilux.mx



THE ROLLUX BOOK

Tejidos para persianas enrollables

COLECCIÓN BLACKOUT

THE ROLLUX BOOK

COLECCIÓN BLACKOUT

6	DAKU BLACKOUT	42	PREMIUM PLUS BLACKOUT FR
12	SENSE BLACKOUT	48	SINGULAR BLACKOUT FR
18	CAPTIVA BLACKOUT	54	SOUTH BEACH BLACKOUT
24	STUCCO BLACKOUT	60	SOUTH BEACH BLACKOUT DUPLEX
30	IMAGINE BLACKOUT FR SANITIZED	66	PINPOINTE BLACKOUT FR
36	SUNSET BLACKOUT		

11
MODELOS

93
COLORES

Todos nuestros distribuidores trabajan con tejidos, componentes y motores VERTILUX si alguien te ofrece un producto diferente al que deseas o un producto que no es VERTILUX repórtalo, la satisfacción de nuestros clientes es primero.




DAKU BLACKOUT

The Ultimate Blackout Collection



COLECCIÓN BLACKOUT

DAKU BLACKOUT

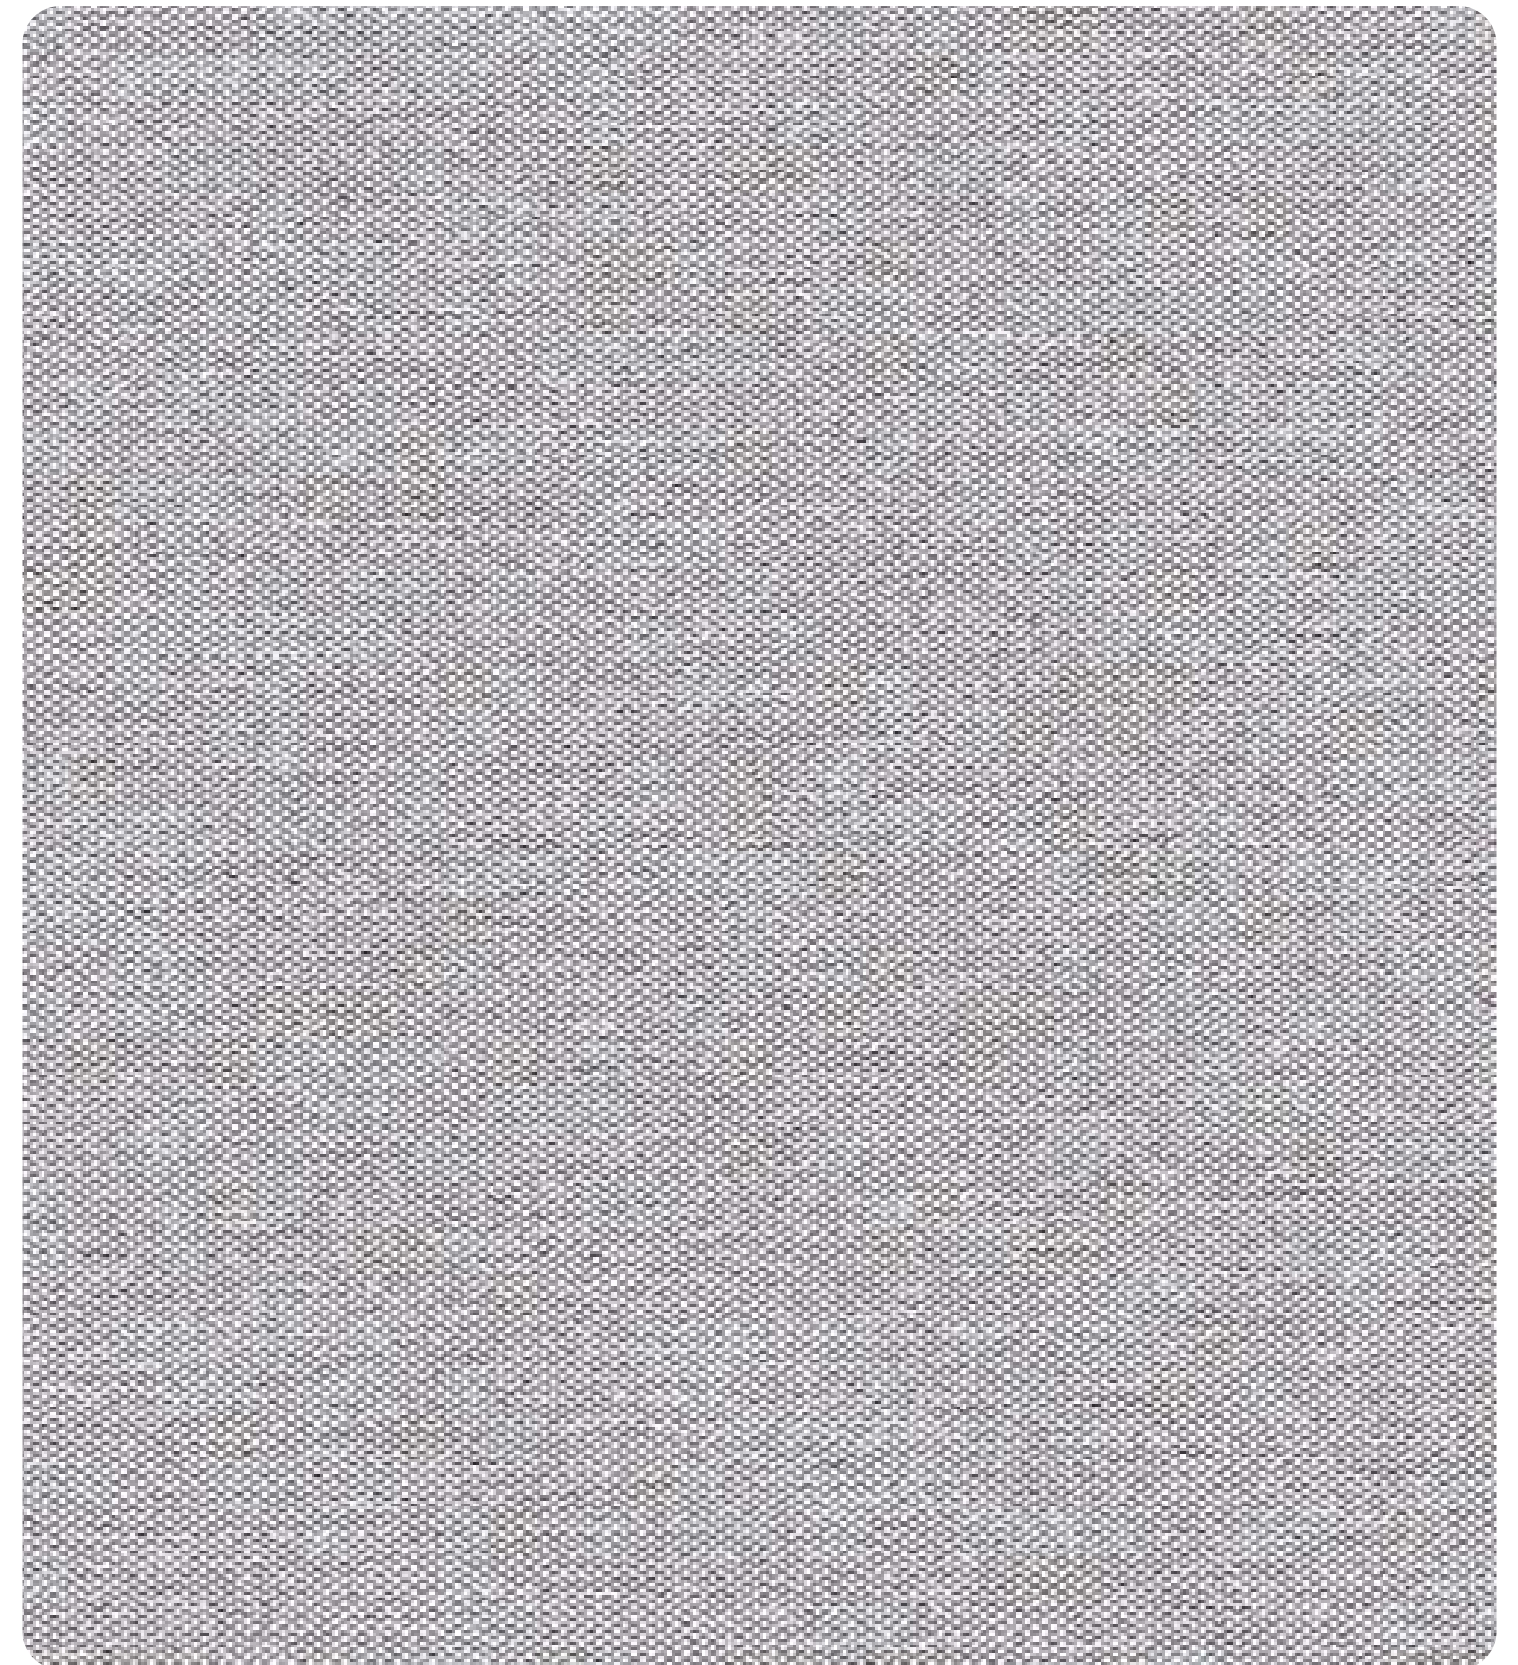

SILVER 0-002-11-03104

DAKU BLACKOUT

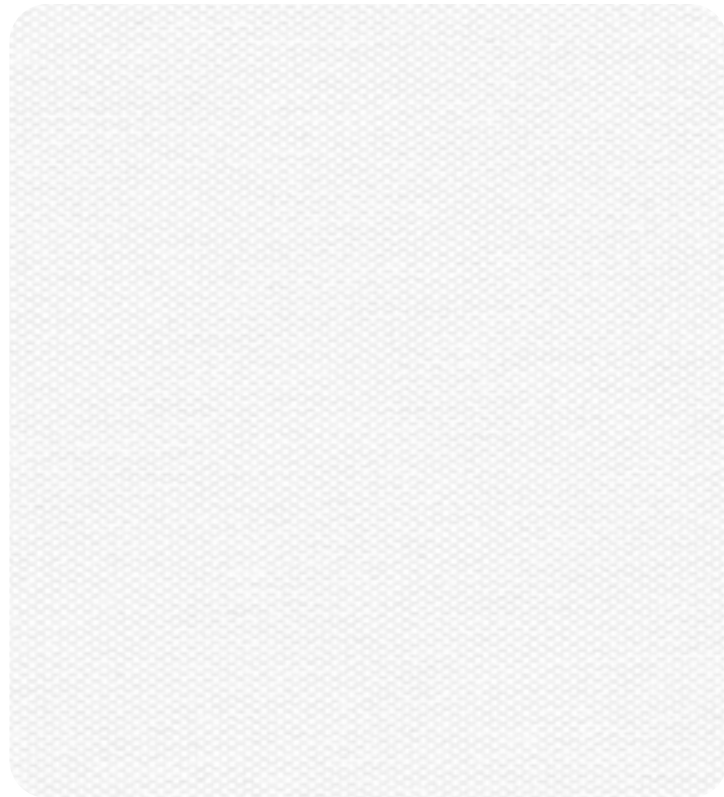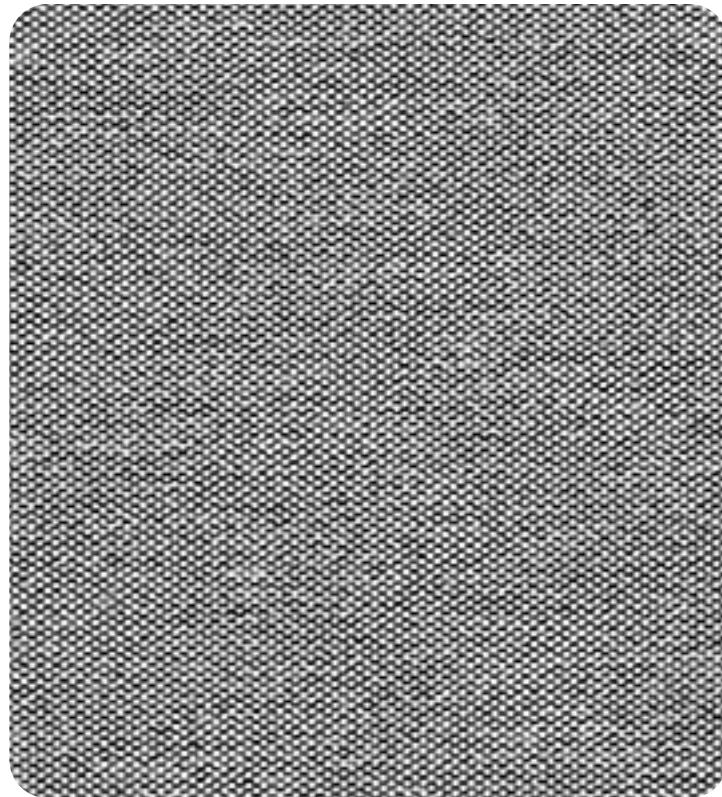**WHITE** 0-002-11-01104**ASPHALT** 0-002-11-01104**STONE** 0-002-11-04104**IVORY** 0-002-11-02104

DAKU BLACKOUT

**BUCKWHEAT** 0-002-11-05104

INTIMATE DAKU BLACKOUT



TECHNICAL PROPERTIES

Composition	100% PES
Weight	356 g/m ² ± 12% 10.50 oz/yd ² ± 12%
Thickness	0.6 mm ± 10% 0.024 in ± 10%
Roll Width	2.65 m 104.3 in
UV Blockage	100 %
Light Fastness	Coated Side: 6-7/8

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

MANUFACTURING



Can be
Railroaded



Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades



Sliding
Panels



Indoor Use
Only



IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

Visita nuestro blog

Ideas para tu espacio

Ir ahora ►



THE ROLLUX BOOK



SENSE BLACKOUT

The Ultimate Blackout Collection

SENSE BLACKOUT

GRANITE 0-002-03-00498

SENSE BLACKOUT



WHITE 0-002-03-00198



IVORY 0-002-03-00298



FOG 0-002-03-00398



SEA ICE 0-002-03-00598

SENSE BLACKOUT



CHERRY BLOSSOMS 0-002-03-00698

NIGHTFALL SENSE BLACKOUT



TECHNICAL PROPERTIES

Composition	100% PES
Weight	White: 335 g/m ² ± 12% 9.88 oz/yd ² ± 12% Other colors: 390 g/m ² ± 12% 11.50 oz/yd ² ± 12%
Thickness	White: 0.5 mm ± 10% 0.020 in ± 10% Other colors: 0.6 mm ± 10% 0.024 in ± 10%
Roll Width	2.5 m 98 in
Roll Length	White: 25 m 27.34 yd Other colors: 20 m 21.87 yd
UV Blockage	100%
Light Fastness	6-7 / 8 Xenotest Grade

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

MANUFACTURING



Use Only on
Roll Direction



Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades



Sliding
Panels



Indoor Use
Only

Visita nuestro blog

Ideas para tu espacio

Ir ahora ►



THE ROLLUX BOOK

COLECCIÓN BLACKOUT

Vertilux México





CAPTIVA BLACKOUT

The Ultimate Blackout Collection

COLECCIÓN BLACKOUT

CAPTIVA BLACKOUT



GREY 0-002-14-00600

CAPTIVA BLACKOUT

**SAND** 0-002-14-00500**WHITE** 0-002-14-00100**IVORY** 0-002-14-00200**COFFEE** 0-002-14-00900

CAPTIVA BLACKOUT

**TAN** 0-002-14-00700

INTIMATE CAPTIVA BLACKOUT



TECHNICAL PROPERTIES

Composition	100% PES
Weight	390 g/m ² ± 5% 11.50 oz/yd ² ± 5%
Thickness	0.58 mm ± 5% 0.023 in ± 5%
Roll Width	3.0 m 118 in
Roll Length	30 m 32.81 yd
UV Blockage	100%
Light Fastness	Class 5

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

MANUFACTURING



Use Only on
Roll Direction



Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades



Sliding
Panels



Indoor Use
Only

Visita nuestro blog

Ideas para tu espacio

[Ir ahora ►](#)



THE ROLLUX BOOK




STUCCO BLACKOUT

The Ultimate Blackout Collection


COLECCIÓN BLACKOUT

STUCCO BLACKOUT

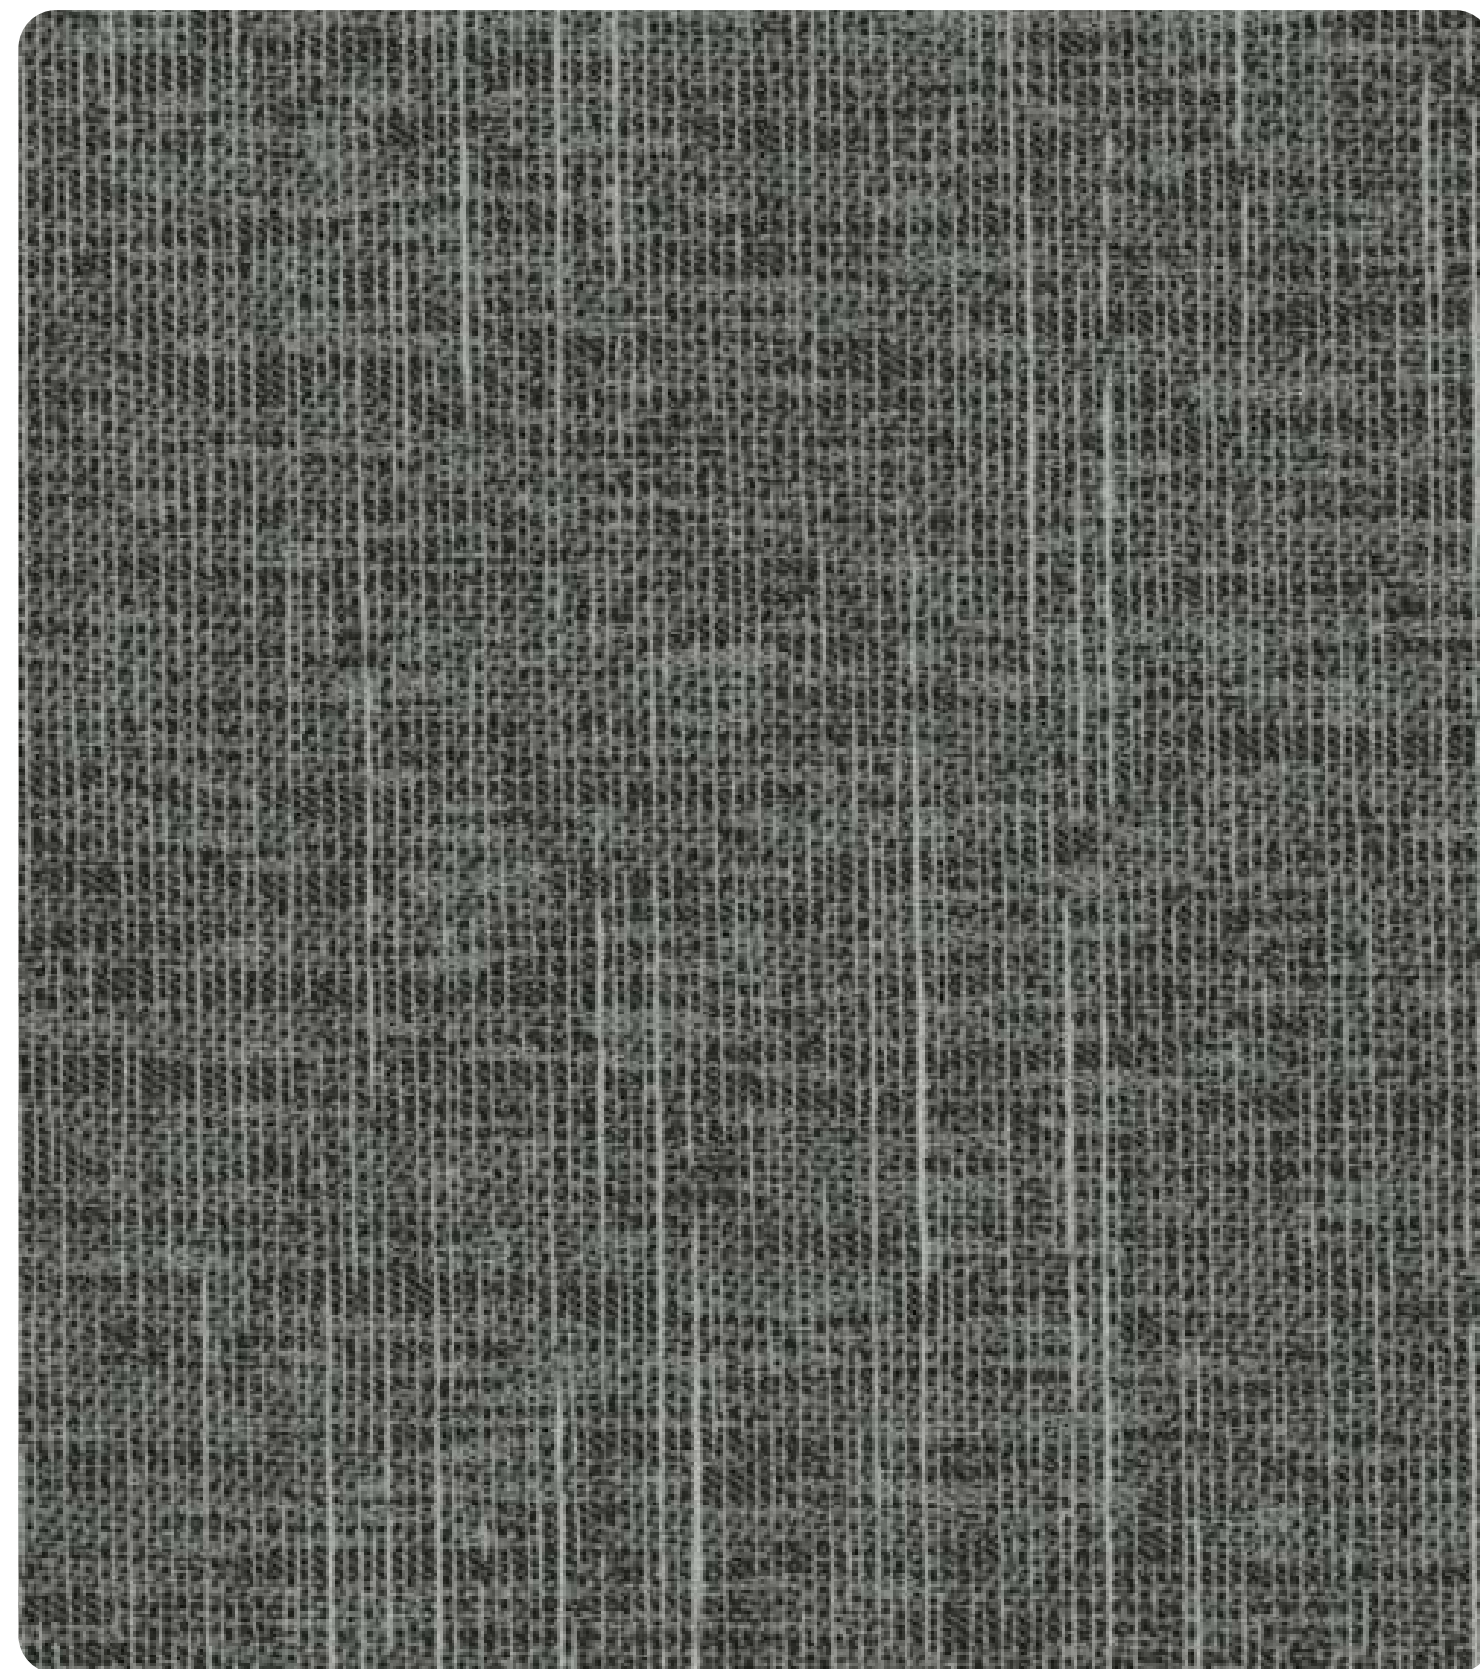

ASH 0-002-96-06110

STUCCO BLACKOUT

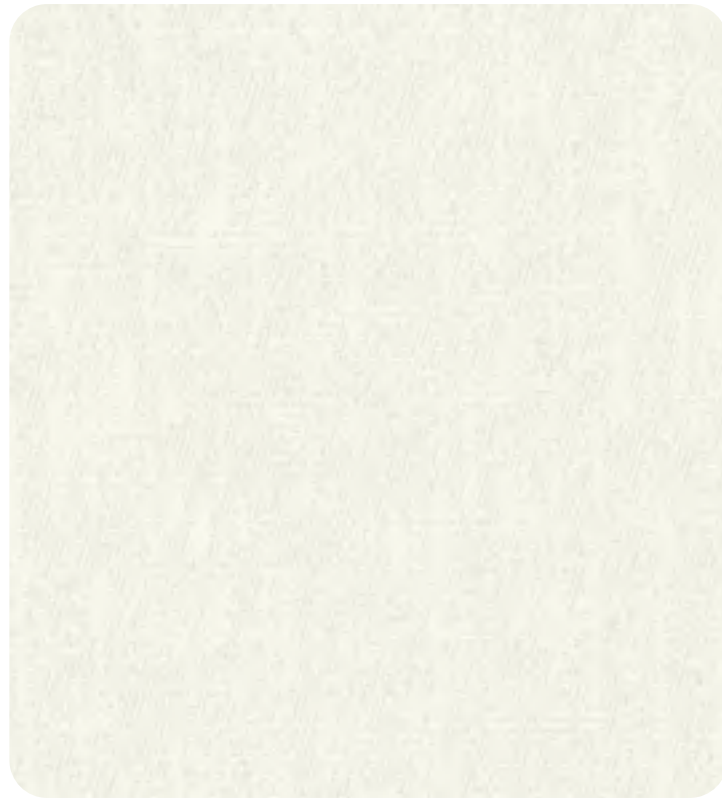**WHITE** 0-002-96-01110**OFF WHITE** 0-002-96-02110**LINEN** 0-002-96-03110**SAND** 0-002-96-04110

STUCCO BLACKOUT

**COFFEE** 0-002-96-05110

INTIMATE STUCCO BLACKOUT



TECHNICAL PROPERTIES

Composition	100% PES Base Cloth, Foamed Backing
Weight	360 g/m ² ± 5% 10.62 oz/yd ² ± 5%
Thickness	0.48 mm ± 5% 0.019 in ± 5%
Roll Width	2.8 m 110 in
Tensile Strength	Warp: 860 daN/5cm ± 100 Weft: 990 daN/5cm ± 100
Tearing Strength	Warp: 140 daN ± 30 Weft: 230 daN ± 30
UV Blockage	100%
Light Fastness	Class 4-5

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

MANUFACTURING



Use Only on
Roll Direction



Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades



Sliding
Panels



Indoor Use
Only

Visita nuestro blog

Ideas para tu espacio

Ir ahora ►



THE ROLLUX BOOK

COLECCIÓN BLACKOUT

Vertilux México






IMAGINE BLACKOUT FR SANITIZED

The Ultimate Blackout Collection


COLECCIÓN BLACKOUT

IMAGINE BLACKOUT FR SANITIZED

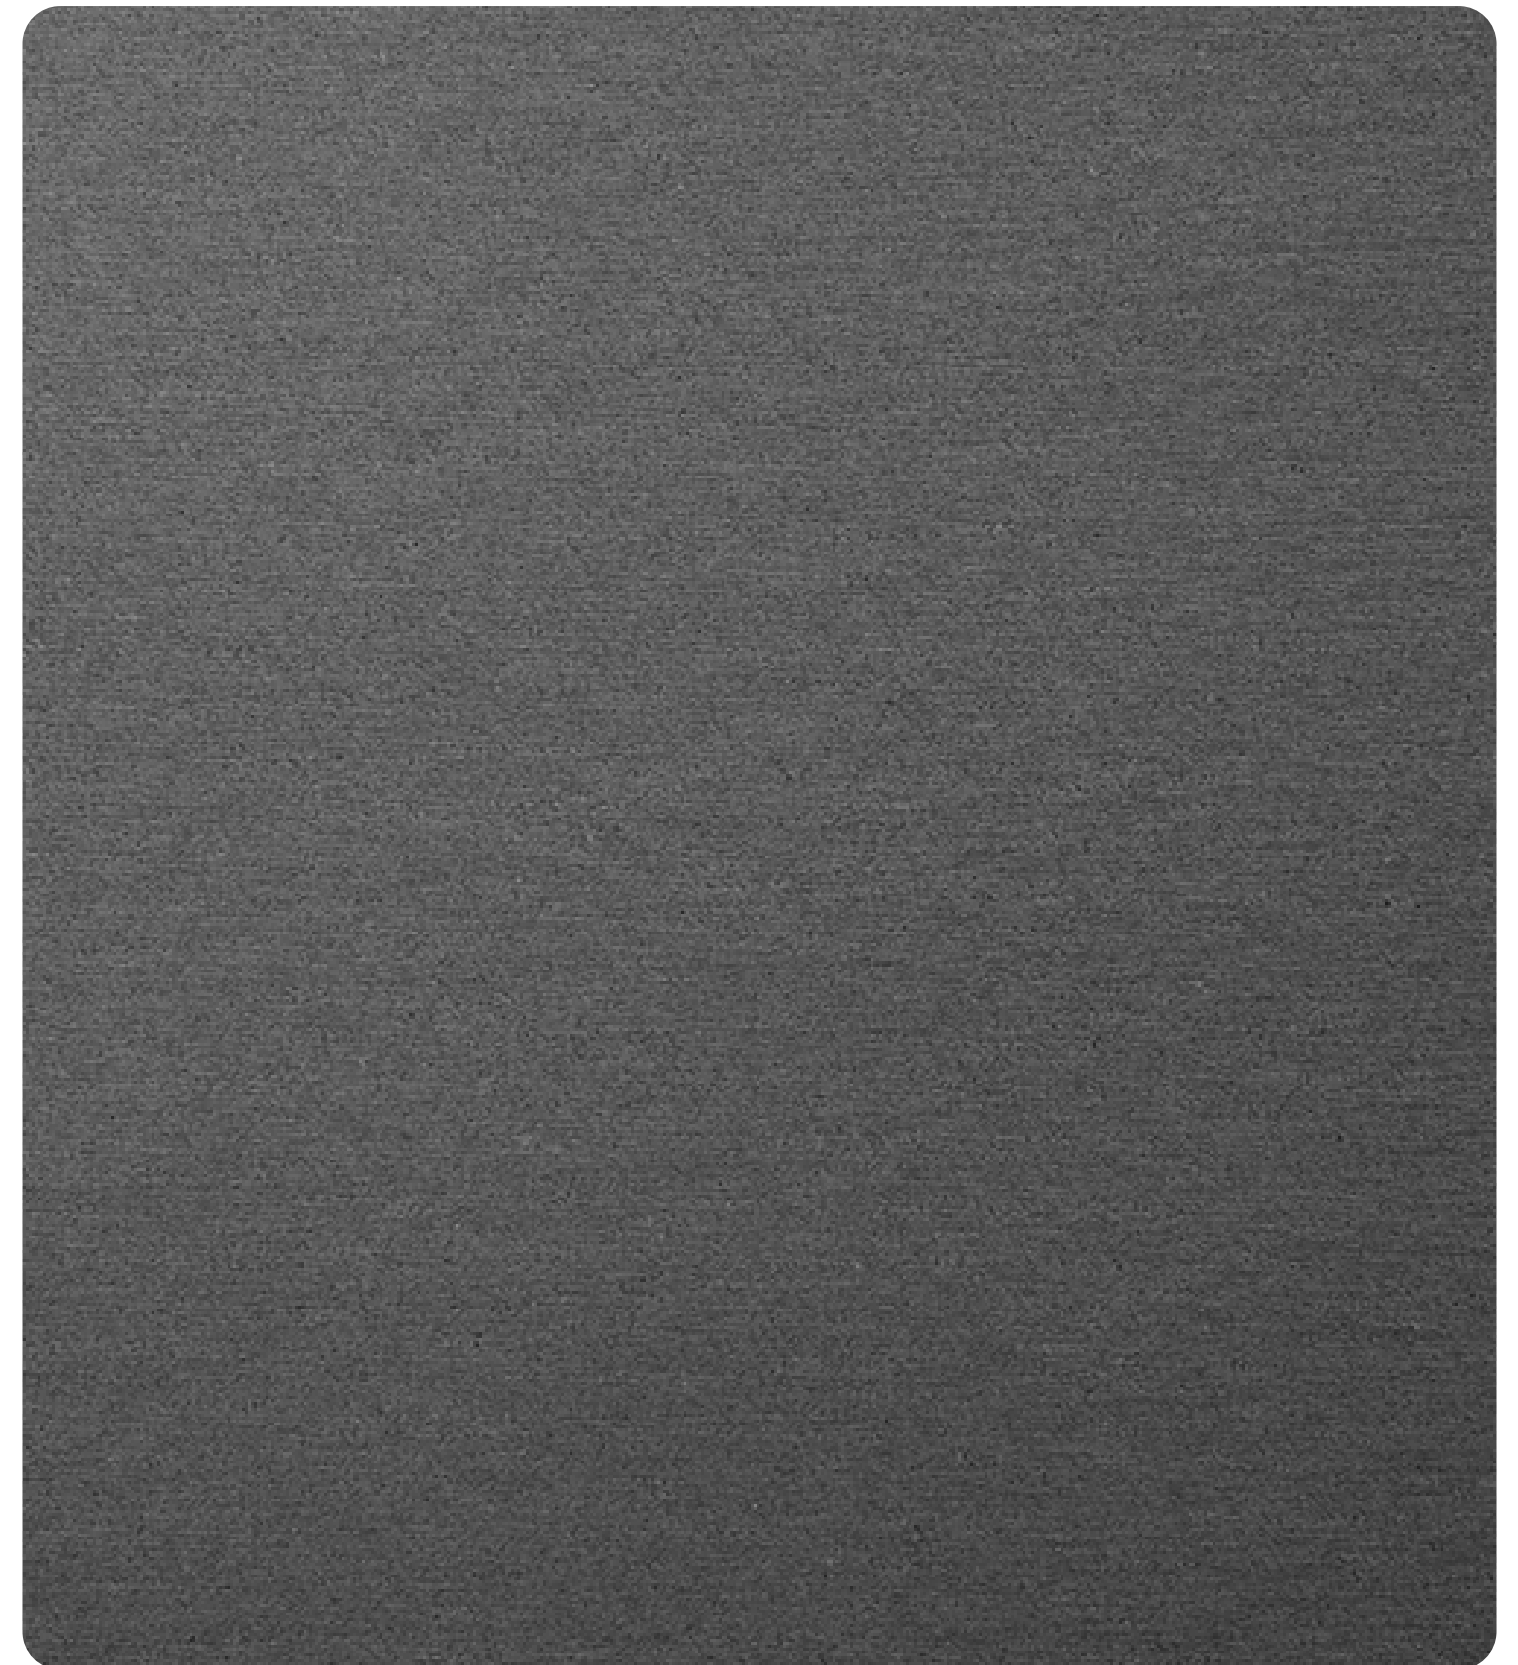

SMOKE 0-002-82-16114

IMAGINE BLACKOUT FR SANITIZED

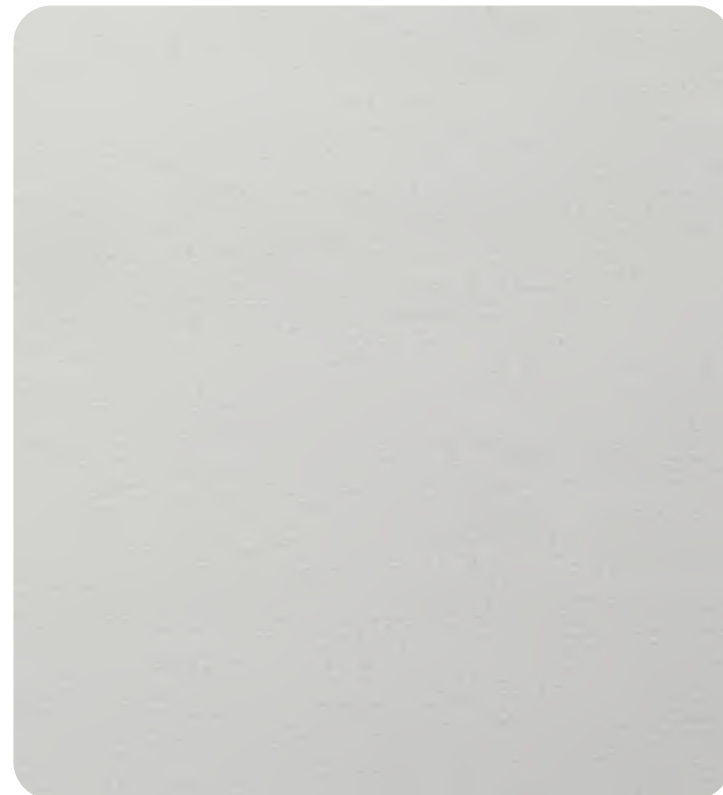**DOVE** 0-002-82-13114**NAVY** 0-002-82-09114**WHITE** 0-002-82-01114**CUSTARD** 0-002-82-02114

IMAGINE BLACKOUT FR SANITIZED

**SAND** 0-002-82-04114**BEIGE** 0-002-82-15114**COFFEE** 0-002-82-06114**TAN** 0-002-82-05114

NIGHTFALL IMAGINE BLACKOUT FR SANITIZED



TECHNICAL PROPERTIES

Composition	100% PES
Weight	346 g/m ² ± 12% 10.2 oz/yd ² ± 12%
Thickness	0.40 mm ± 10% 0.016 in ± 10%
Roll Width	2.65 m 104.3 in
UV Blockage	100%
Light Fastness	Coated Side: 6-7/8 Xenotest Grade
Flame Retardant	DIN 4102-1: B1 NFPA 701: Pass EN 13501-1: Bs2d0 EN 13773: Class 1
Wheelmark	IMO Resolution MSC.307(88)-(2010 FTP Code) and IMO MSC/Circ. 1102: Pass

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not use soap solution nor a damp cloth.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

MANUFACTURING



Use Only on
Roll Direction



Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades



Sliding
Panels



Indoor Use
Only

Visita nuestro blog

Ideas para tu espacio

Ir ahora ►



THE ROLLUX BOOK




SUNSET BLACKOUT

The Ultimate Blackout Collection



COLECCIÓN BLACKOUT

SUNSET BLACKOUT

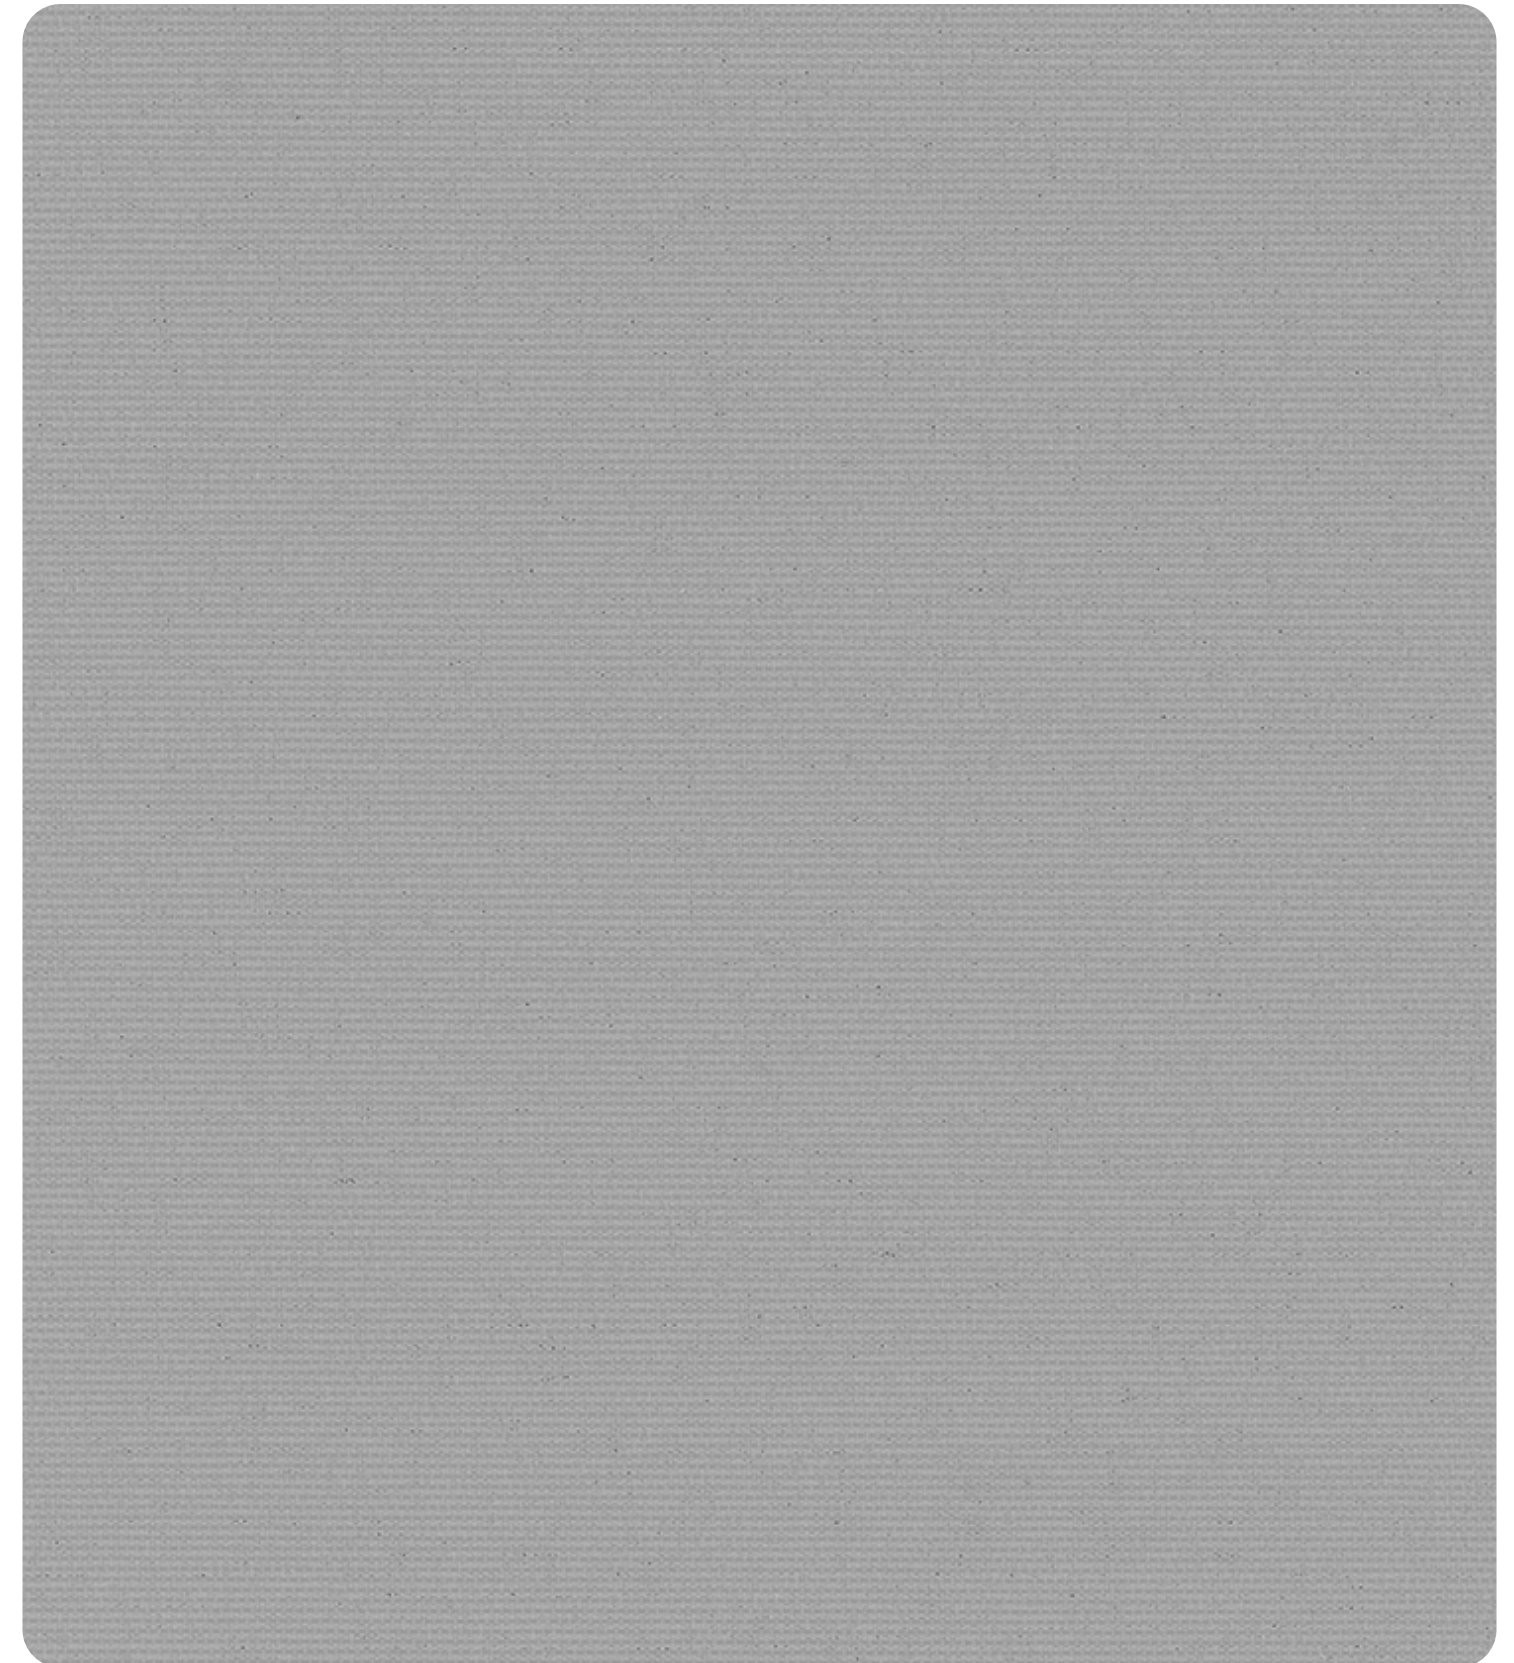


LIGHT GREY 0-002-17-06118

SUNSET BLACKOUT

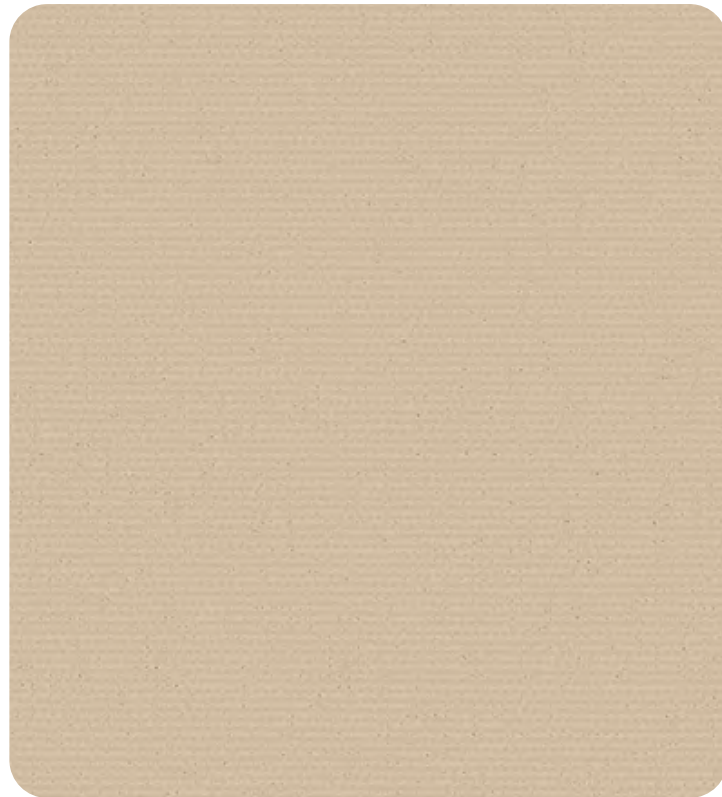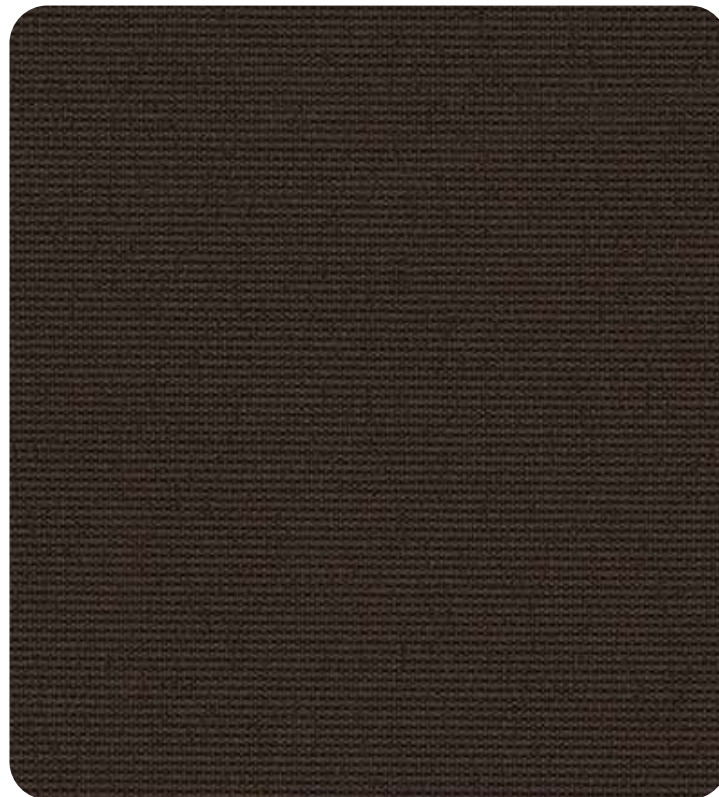**IVORY** 0-002-17-02118 | 0-002-17-02098**BEIGE** 0-002-17-03118**COFFEE** 0-002-17-05118**LATTE** 0-002-17-04118

SUNSET BLACKOUT

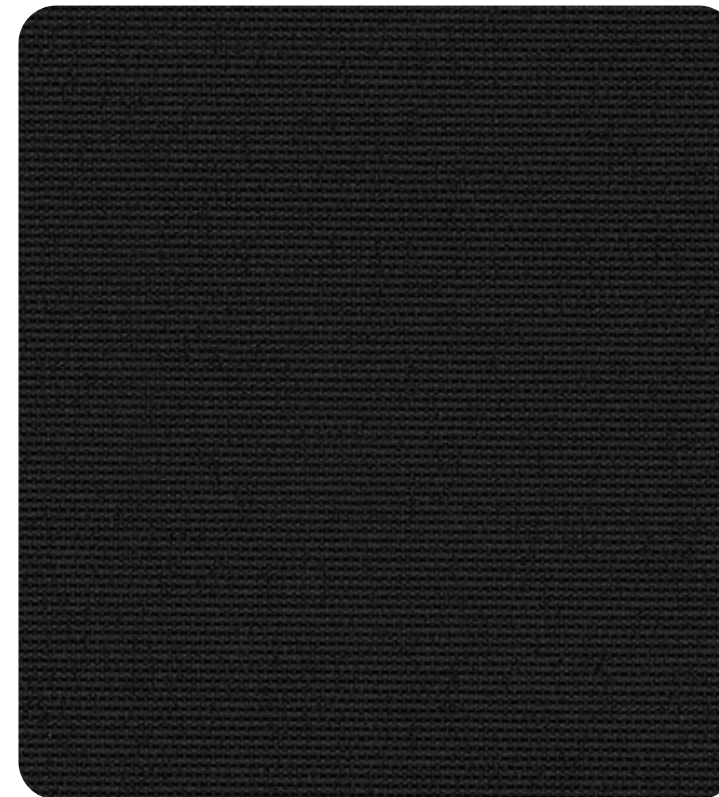**WHITE** 0-002-17-01118 | 0-002-17-01098**DARK GREY** 0-002-17-07118**BLACK** 0-002-17-08118

NIGHTFALL SUNSET BLACKOUT



TECHNICAL PROPERTIES

Composition	100% PES
Weight	400 g/m ² ± 5% 11.8 oz/yd ² ± 5%
Thickness	0.48 mm ± 5% 0.019 in ± 5%
Coating	Acrylic Foam Blackout Coated
Roll Width	All Colors: 3.0 m 118 in White & Ivory: also available in 2.5 m 98 in
UV Blockage	100%
Light Fastness	≥5

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Hand wash with cold water and a mild 5% detergent solution.
2. Wipe gently with a wet sponge.
3. Vacuum clean for regular maintenance.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

MANUFACTURING



Use Only on
Roll Direction



Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades



Sliding
Panels



Indoor Use
Only

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶



THE ROLLUX BOOK

COLECCIÓN BLACKOUT

Vertilux México






PREMIUM PLUS BLACKOUT FR

The Ultimate Blackout Collection


COLECCIÓN BLACKOUT

PREMIUM PLUS BLACKOUT FR

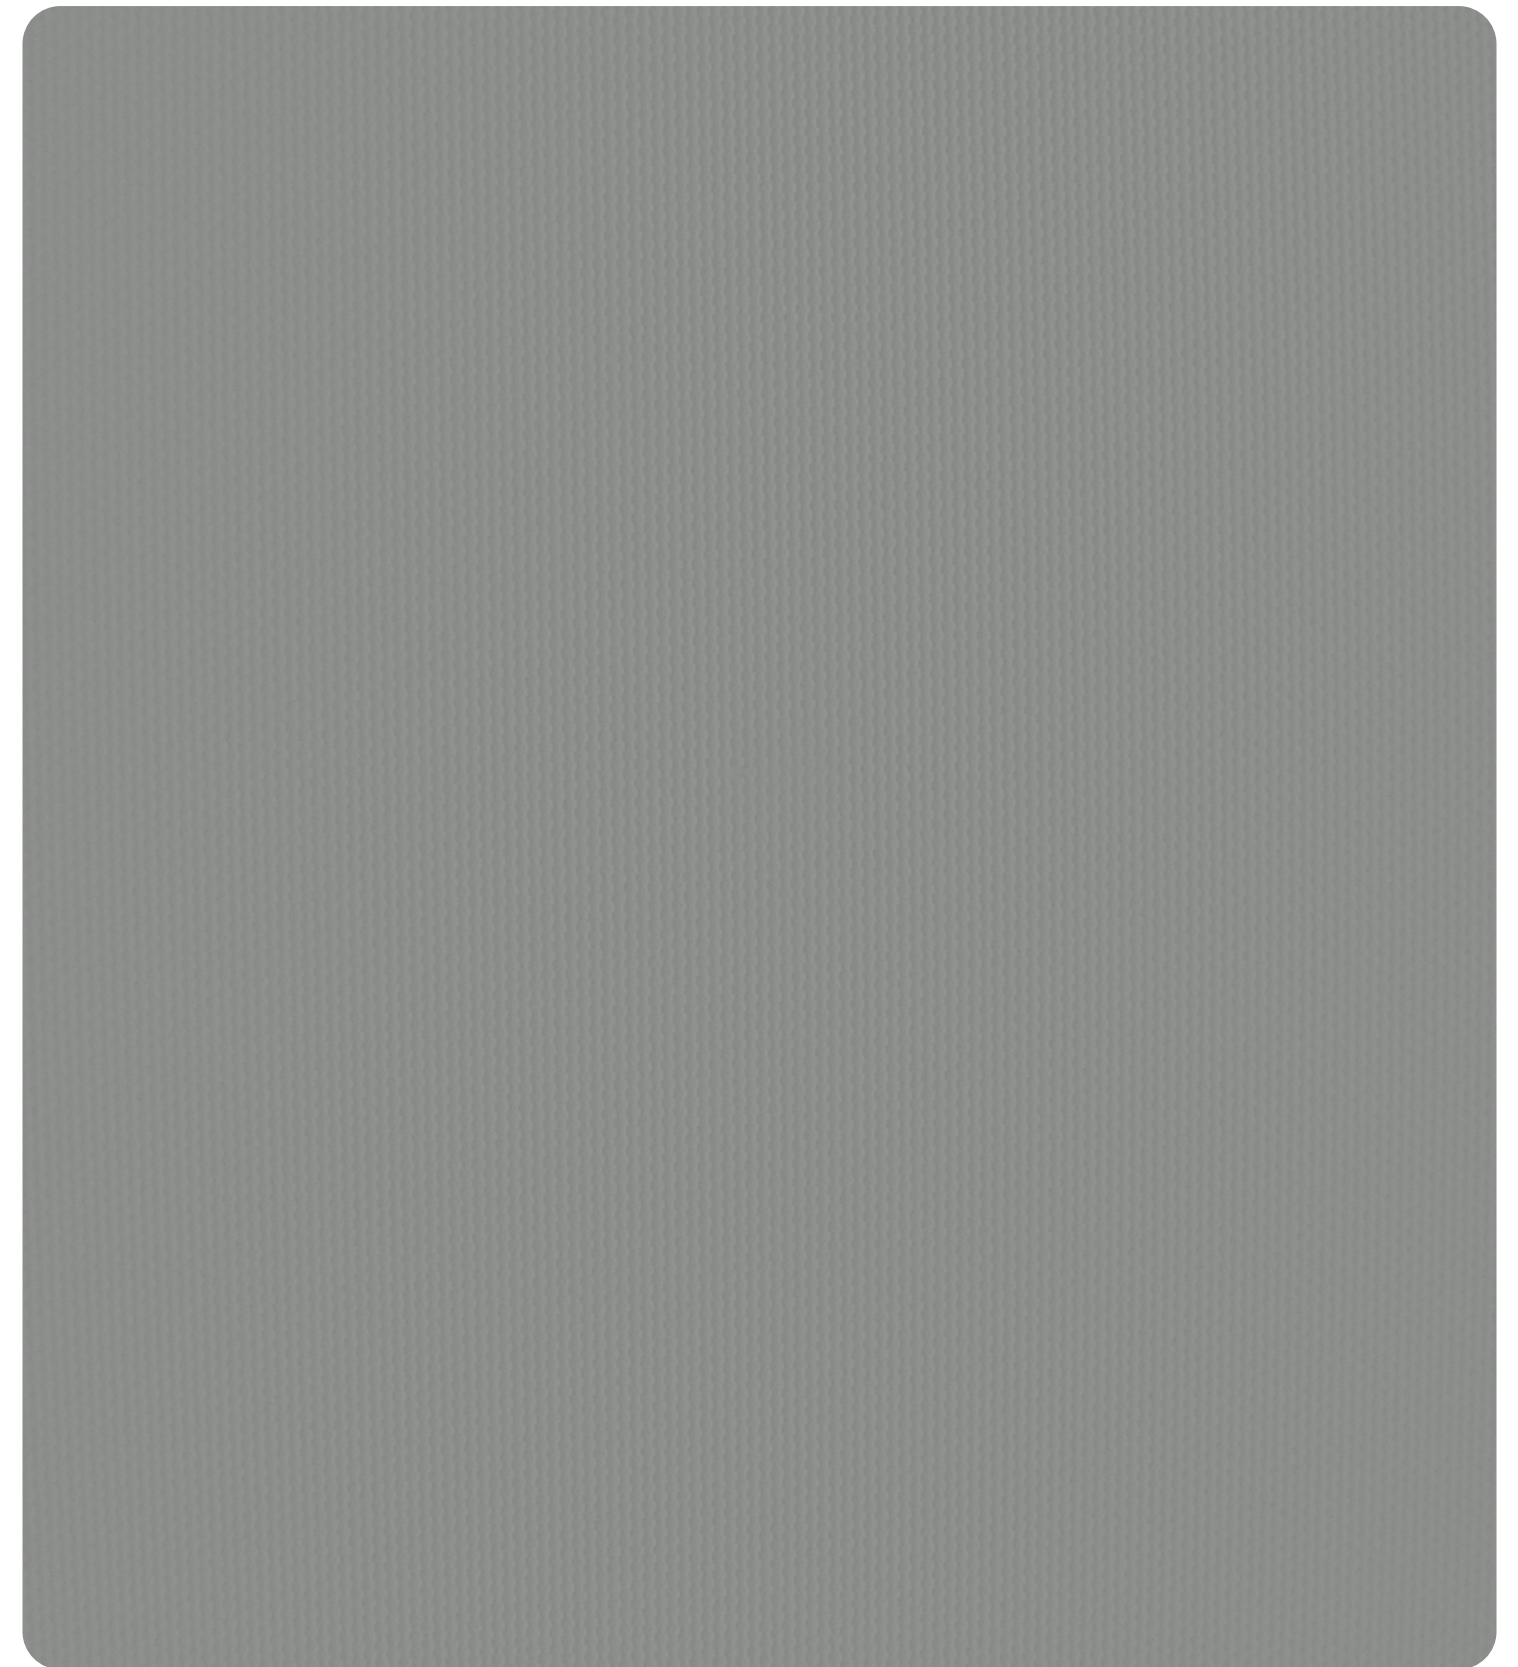


STONE GREY 0-002-70-94672 | 94696 | 63-65118

IMAGINE BLACKOUT FR SANITIZED

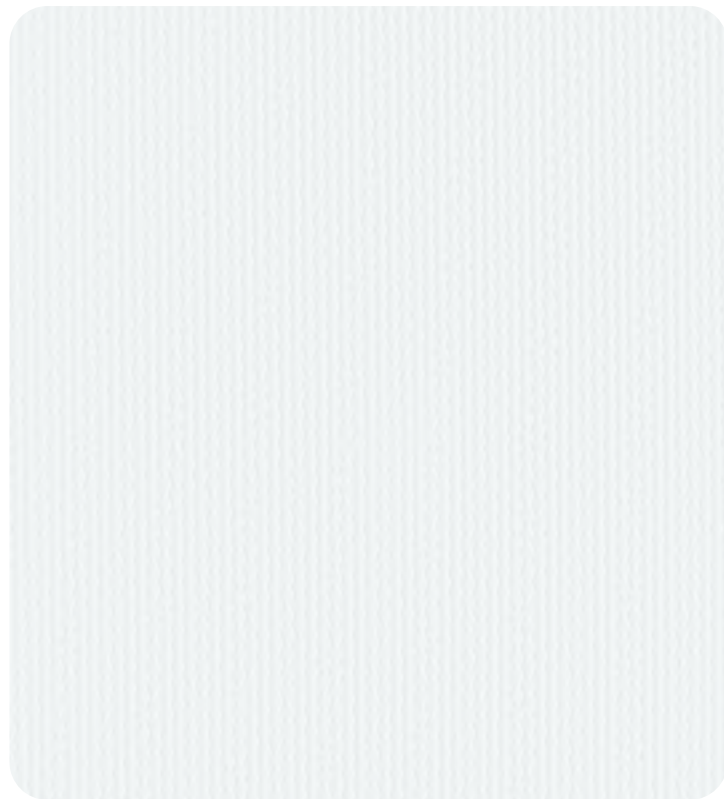

WHITE 0-002-70-96072 | 96096 | 63-60118

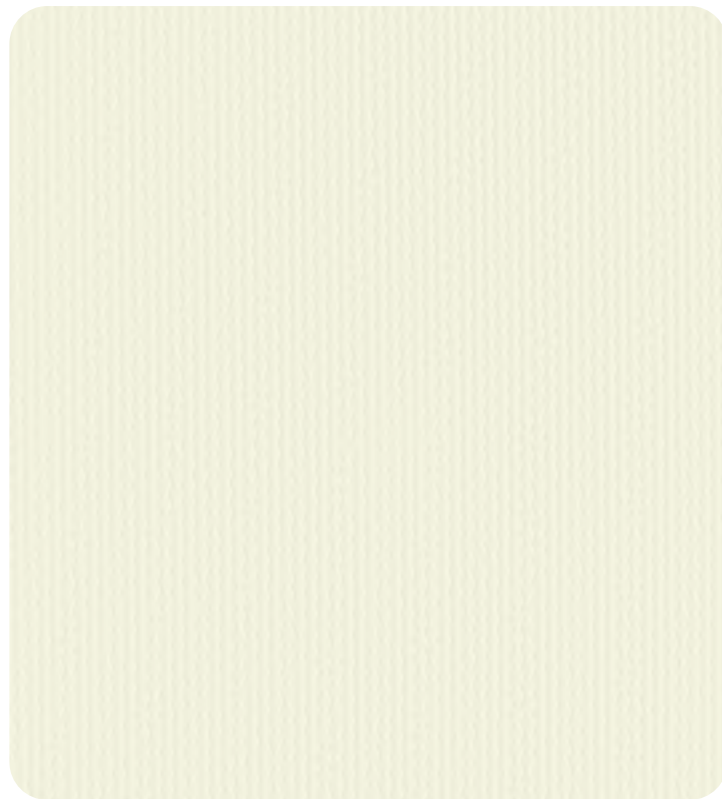

OFF WHITE 0-002-70-93472 | 93496 | 63-61118



BISQUE 0-002-70-93372 | 93396 | 63-62118



BEIGE 0-002-70-92172 | 92196 | 63-66118

IMAGINE BLACKOUT FR SANITIZED



LIGHT GREY 0-002-70-90972 | 90996 | 63-63118



BLACK 0-002-70-93172 | 93196 | 63-64118

NIGHTFALL IMAGINE BLACKOUT FR SANITIZED



TECHNICAL PROPERTIES

Composition	100% PES
Weight	346 g/m ² ± 12% 10.2 oz/yd ² ± 12%
Thickness	0.40 mm ± 10% 0.016 in ± 10%
Roll Width	2.65 m 104.3 in
UV Blockage	100%
Light Fastness	Coated Side: 6-7/8 Xenotest Grade
Flame Retardant	DIN 4102-1: B1 NFPA 701: Pass EN 13501-1: Bs2d0 EN 13773: Class 1
Wheelmark	IMO Resolution MSC.307(88)-(2010 FTP Code) and IMO MSC/Circ. 1102: Pass

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not use soap solution nor a damp cloth.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

MANUFACTURING



Use Only on
Roll Direction



Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades



Sliding
Panels



Indoor Use
Only

Visita nuestro blog

Ideas para tu espacio

Ir ahora ►



THE ROLLUX BOOK




SINGULAR BLACKOUT FR

The Ultimate Blackout Collection



COLECCIÓN BLACKOUT

SINGULAR BLACKOUT FR

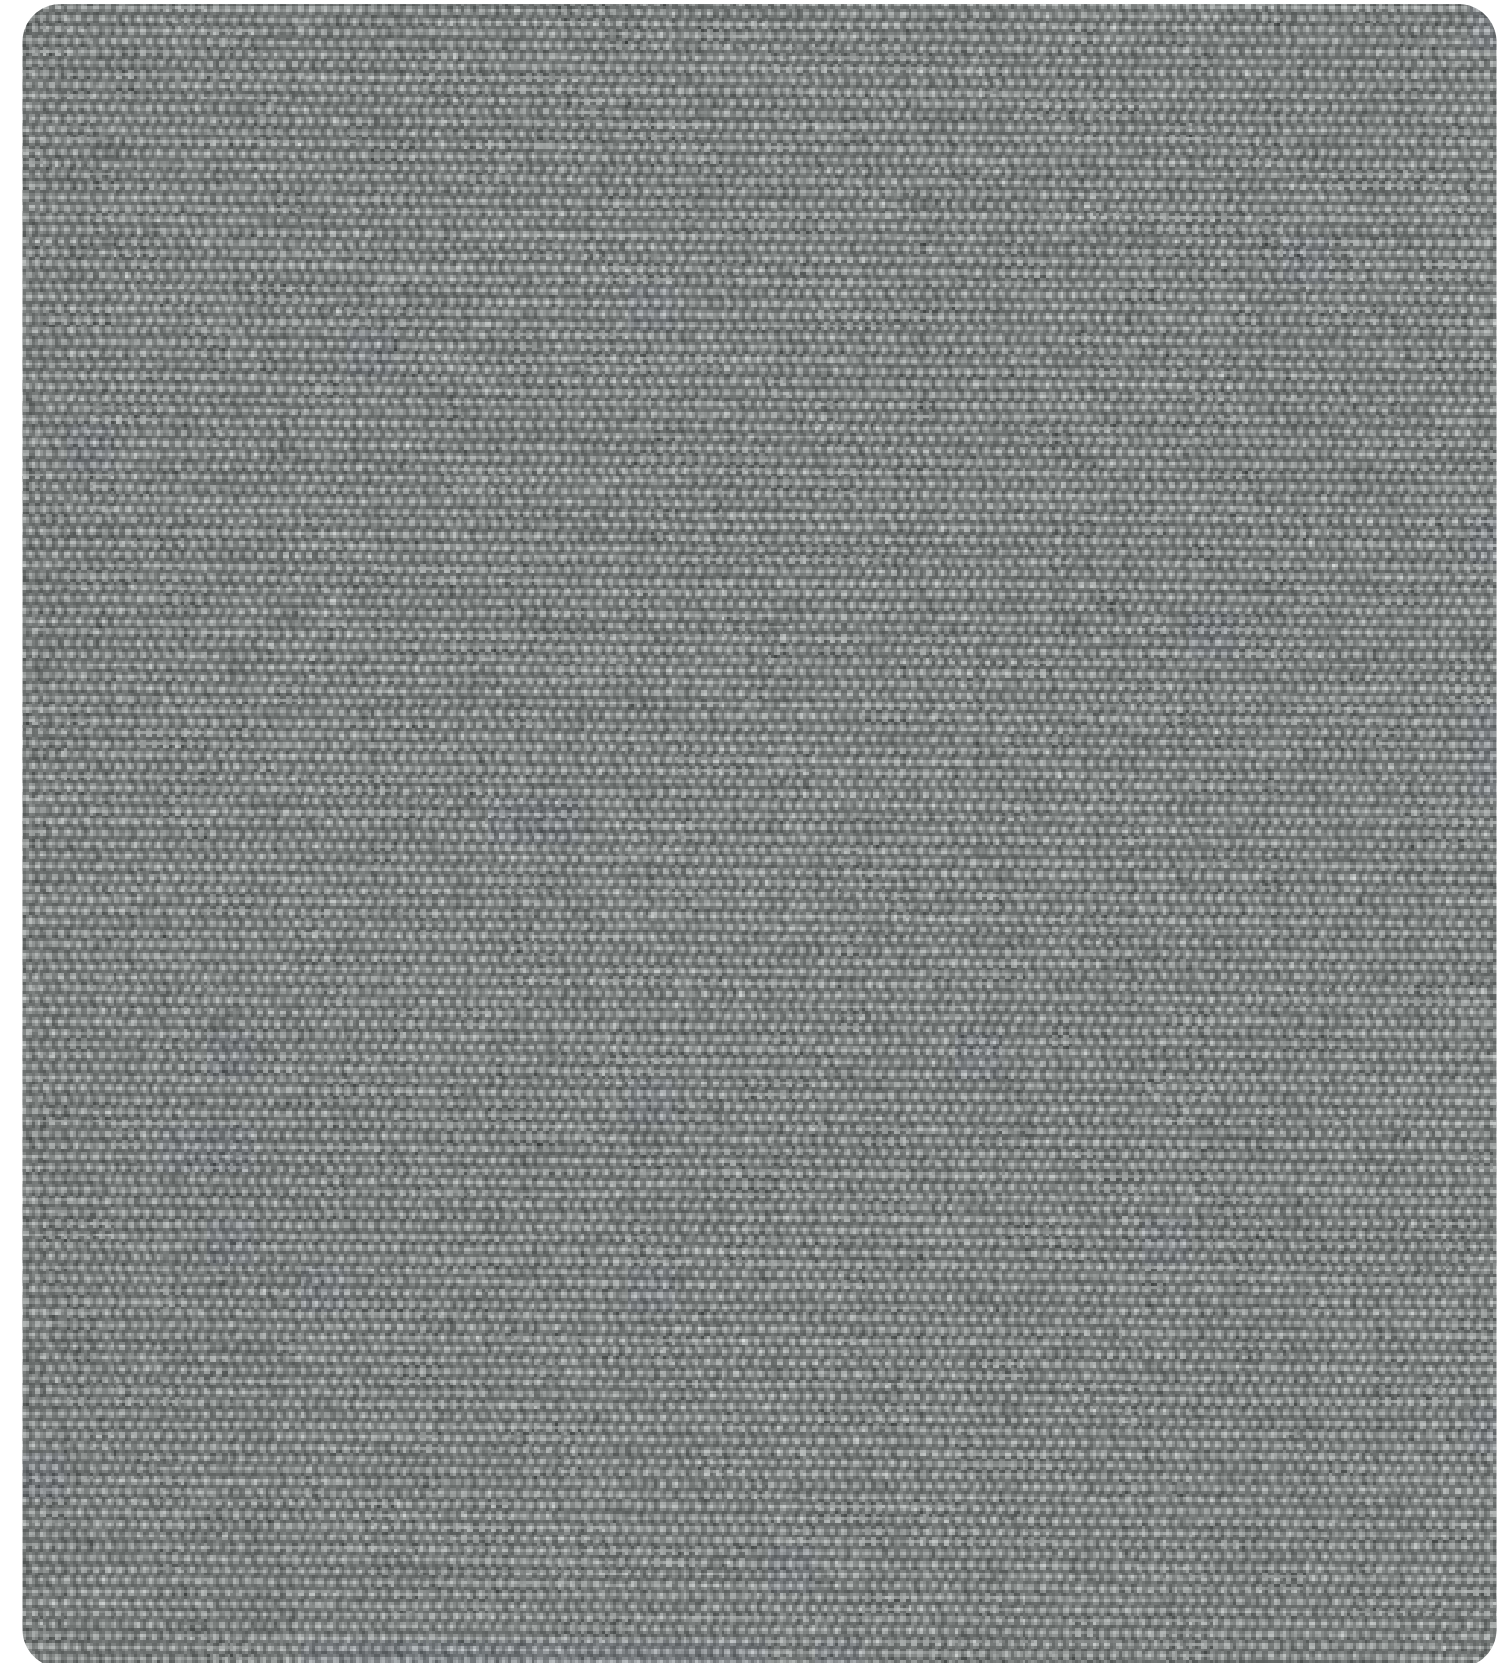

LIGHT GREY 0-002-62-10110

SINGULAR BLACKOUT FR

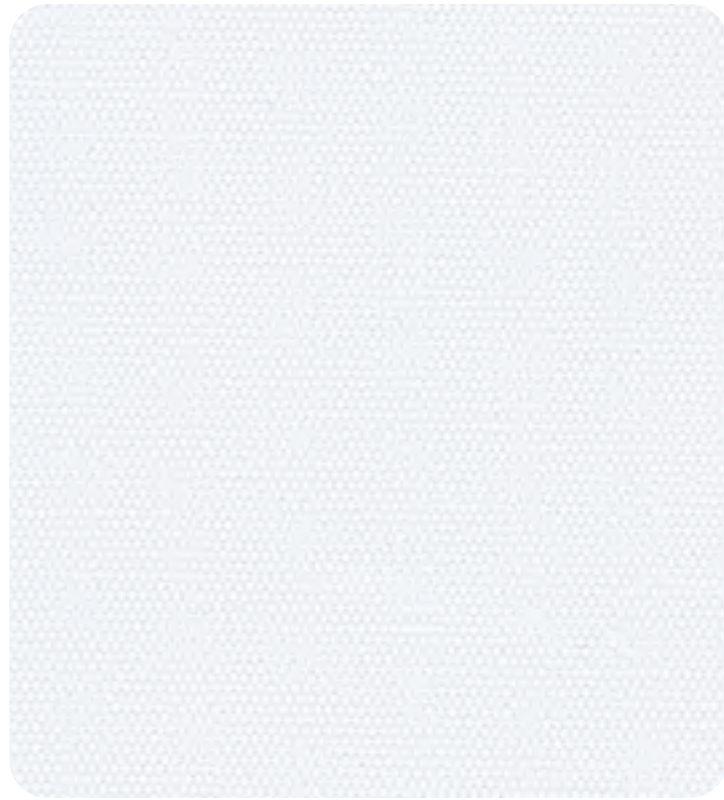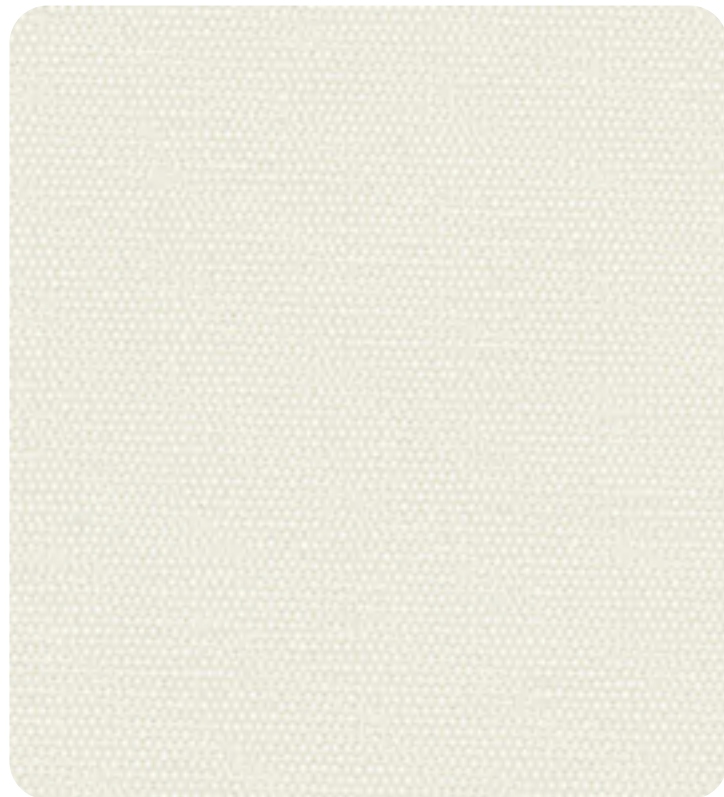**WHITE** 0-002-62-01110**IVORY** 0-002-62-03110**LINEN** 0-002-62-02110**SAND** 0-002-62-04110


SINGULAR BLACKOUT FR

**CAMEL** 0-002-62-05110**MUSHROOM** 0-002-62-06110**CHESTNUT** 0-002-62-07110**CHOCOLATE** 0-002-62-08110

SINGULAR BLACKOUT FR



DARK GREY 0-002-62-11110

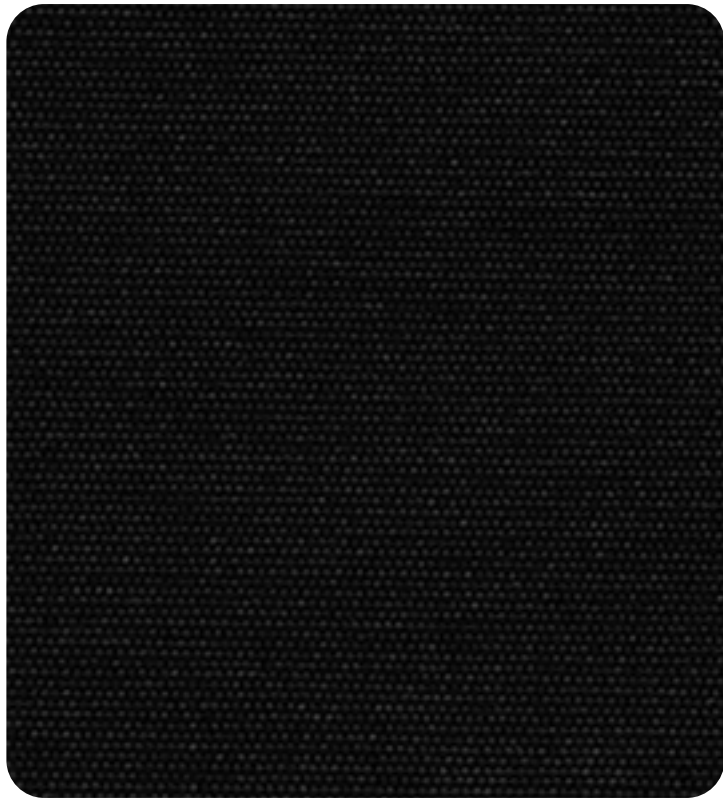

BLACK 0-002-62-09110



INTIMATE
SINGULAR
BLACKOUT FR

TECHNICAL PROPERTIES

Composition	100% PES
Weight	380 g/m² ± 5% 11.2 oz/yd² ± 5%
Thickness	0.61 mm ± 5% 0.024 in ± 5%
Roll Width	2.8 m 110.2 in
UV Blockage	100%
Light Fastness (Grey Scale Level)	> 4 Xenotest Grade
Flame Retardant	NFPA 701

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

MANUFACTURING



Use Only on Roll Direction
Ultrasonic Cut NOT Required

APPLICATIONS



Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶




SOUTH BEACH BLACKOUT

The Ultimate Blackout Collection



COLECCIÓN BLACKOUT

SOUTH BEACH BLACKOUT


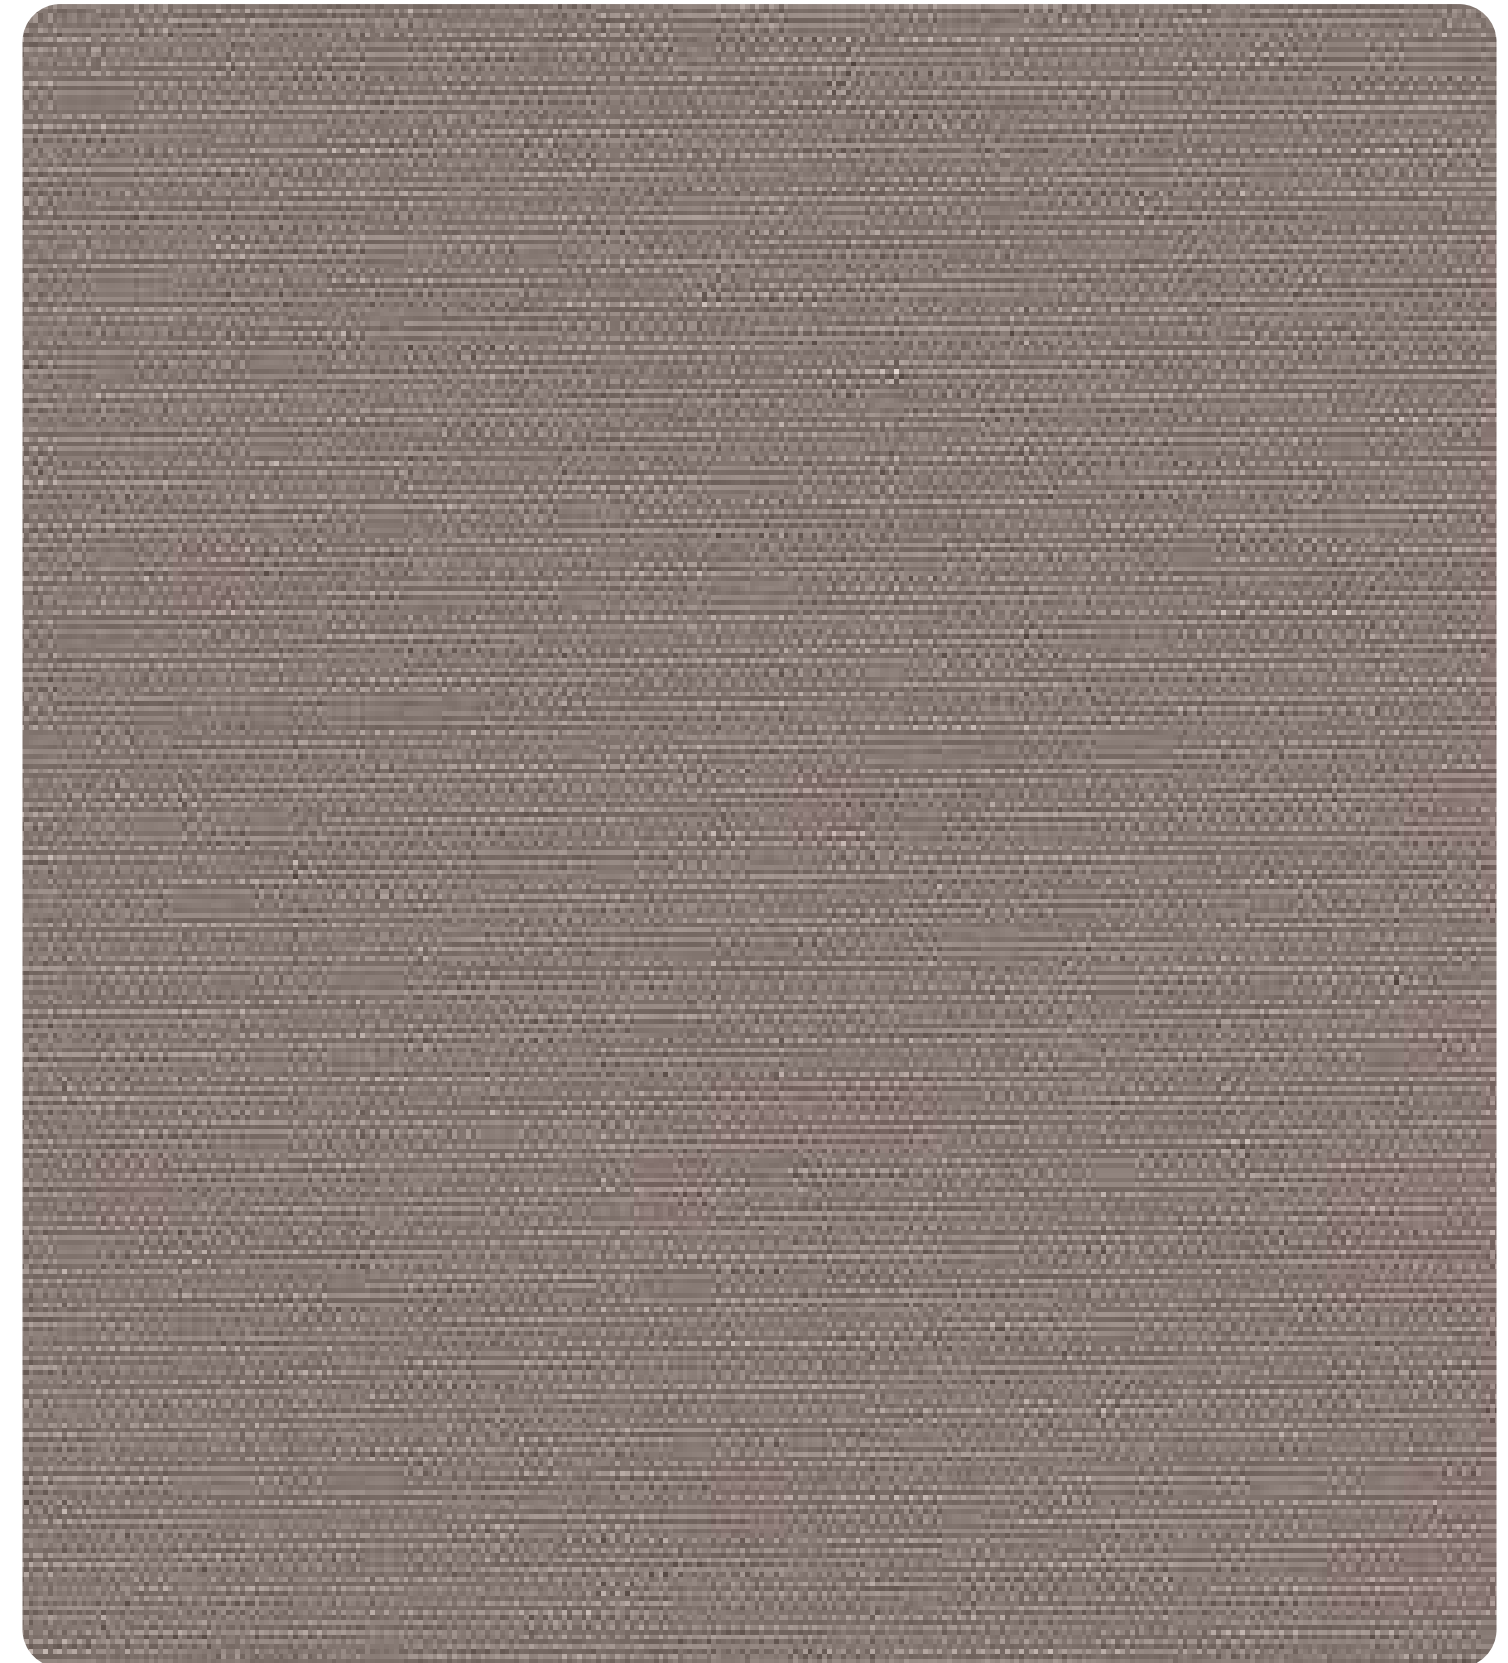


STONE 0-002-93-01698

SOUTH BEACH BLACKOUT

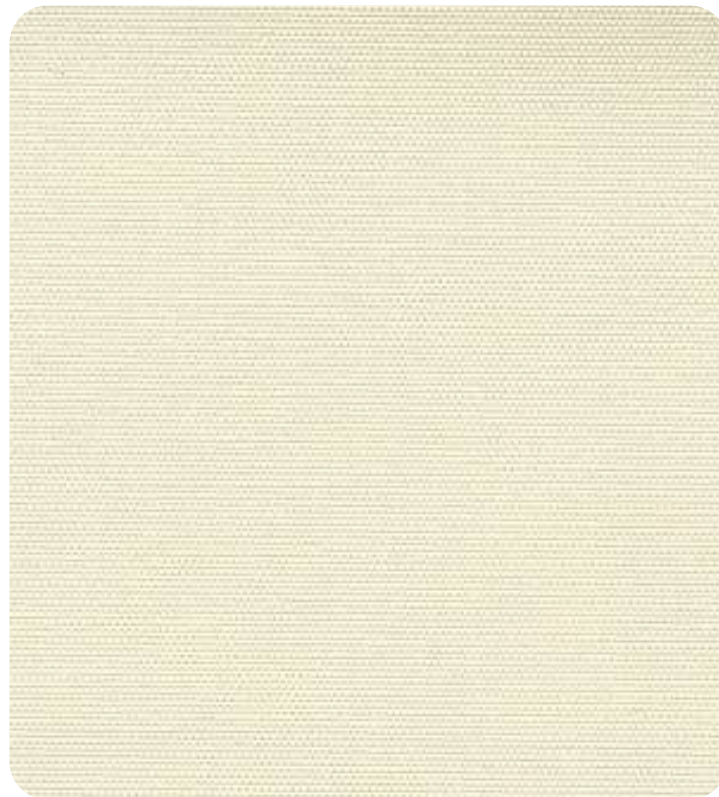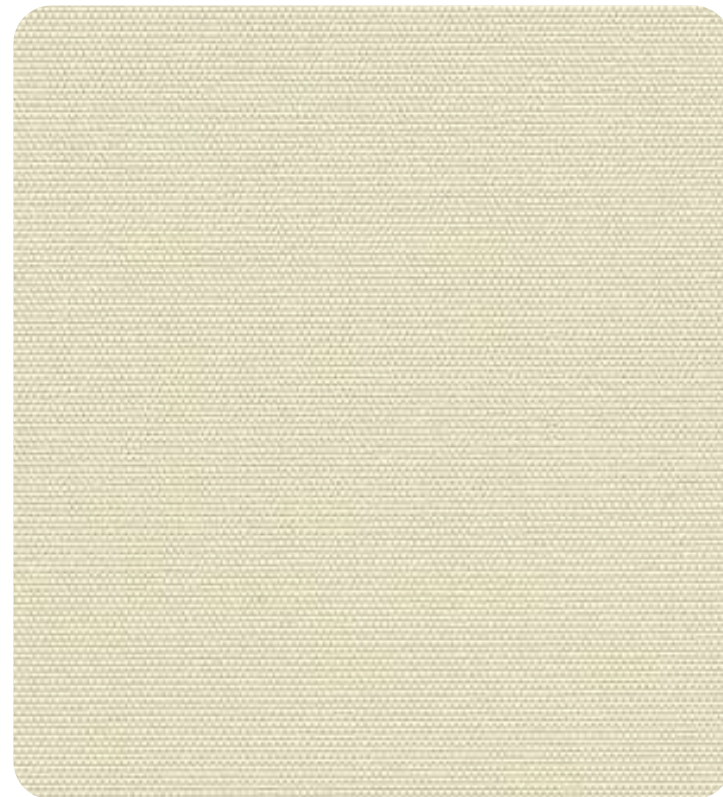**PURE WHITE** 0-002-93-01998**WHITE** 0-002-93-00198**IVORY** 0-002-93-00398**BEIGE** 0-002-93-00498

SOUTH BEACH BLACKOUT

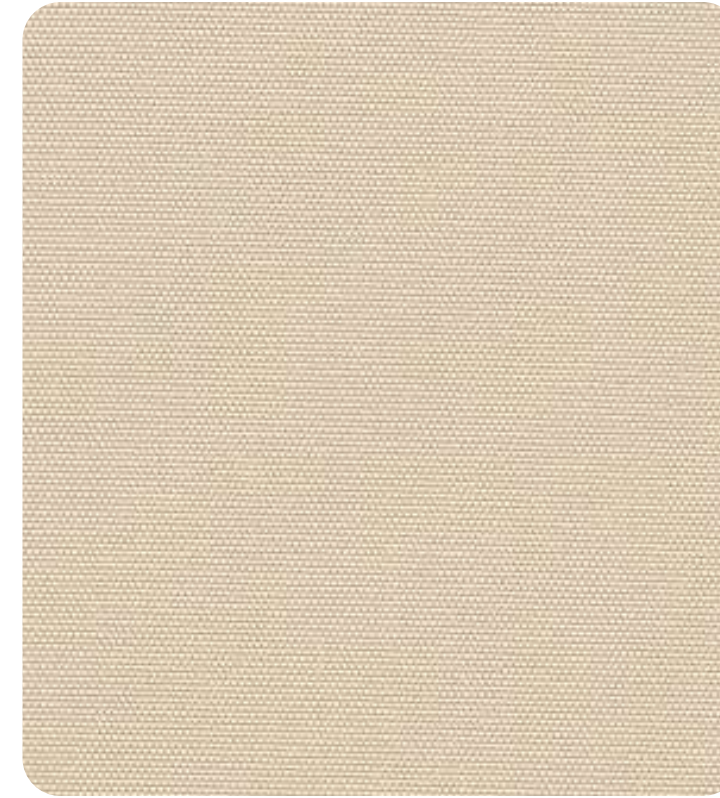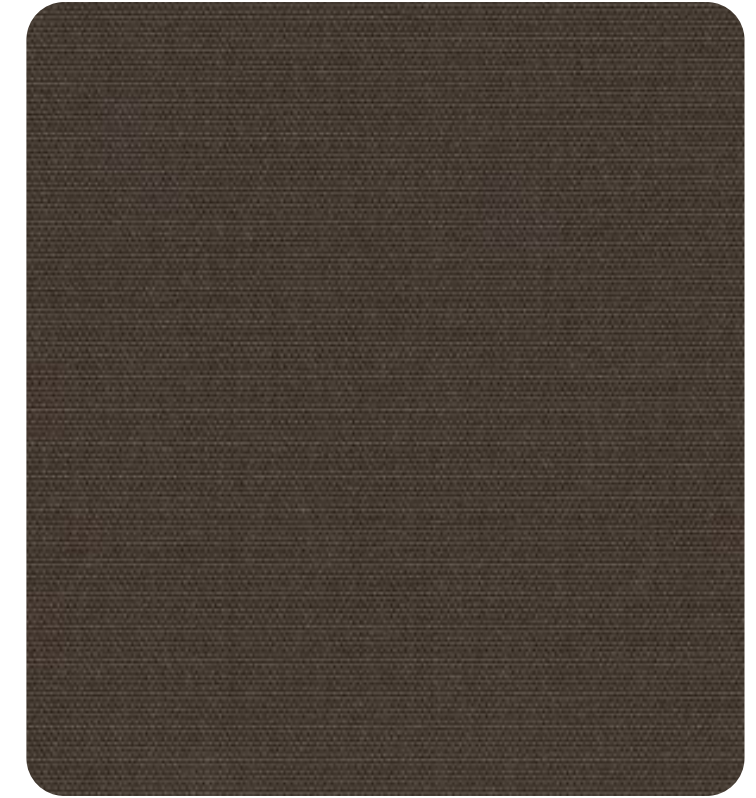**SAND** 0-002-93-00598**CHOCOLATE** 0-002-93-00898**GRASS** 0-002-93-01298**BORDEAUX** 0-002-93-01098


SOUTH BEACH BLACKOUT



EBONY 0-002-93-01798



PUMPKIN 0-002-93-00998

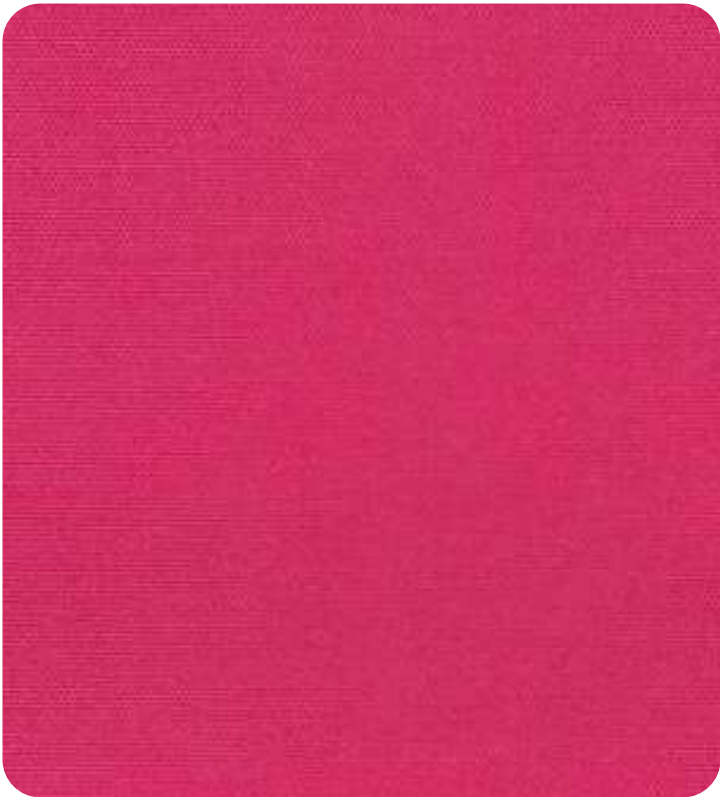

FUCHSIA 0-002-93-01898



BURGUNDY 0-002-93-01198



NIGHTFALL SOUTH BEACH BLACKOUT

TECHNICAL PROPERTIES

Composition	100% PES
Weight	390 g/m² ± 5% 11.5 oz/yd² ± 5%
Thickness	0.50 mm ± 5% 0.020 in ± 5%
Roll Width	2.5 m 98 in
Coating	Acrylic Foam Blackout Coating
UV Blockage	100%
Light Fastness	Class 4-5 [AATCC 16-2003]

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not use soap solution nor a damp cloth.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

MANUFACTURING



Use Only on
Roll Direction

COLD CUT
NOT Required

APPLICATIONS



Roller
Shades

Sliding
Panels

Indoor Use
Only

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶

© 2024 Vertilux




SOUTH BEACH BLACKOUT DUPLEX

The Ultimate Blackout Collection





COLECCIÓN BLACKOUT

SOUTH BEACH BLACKOUT DUPLEX




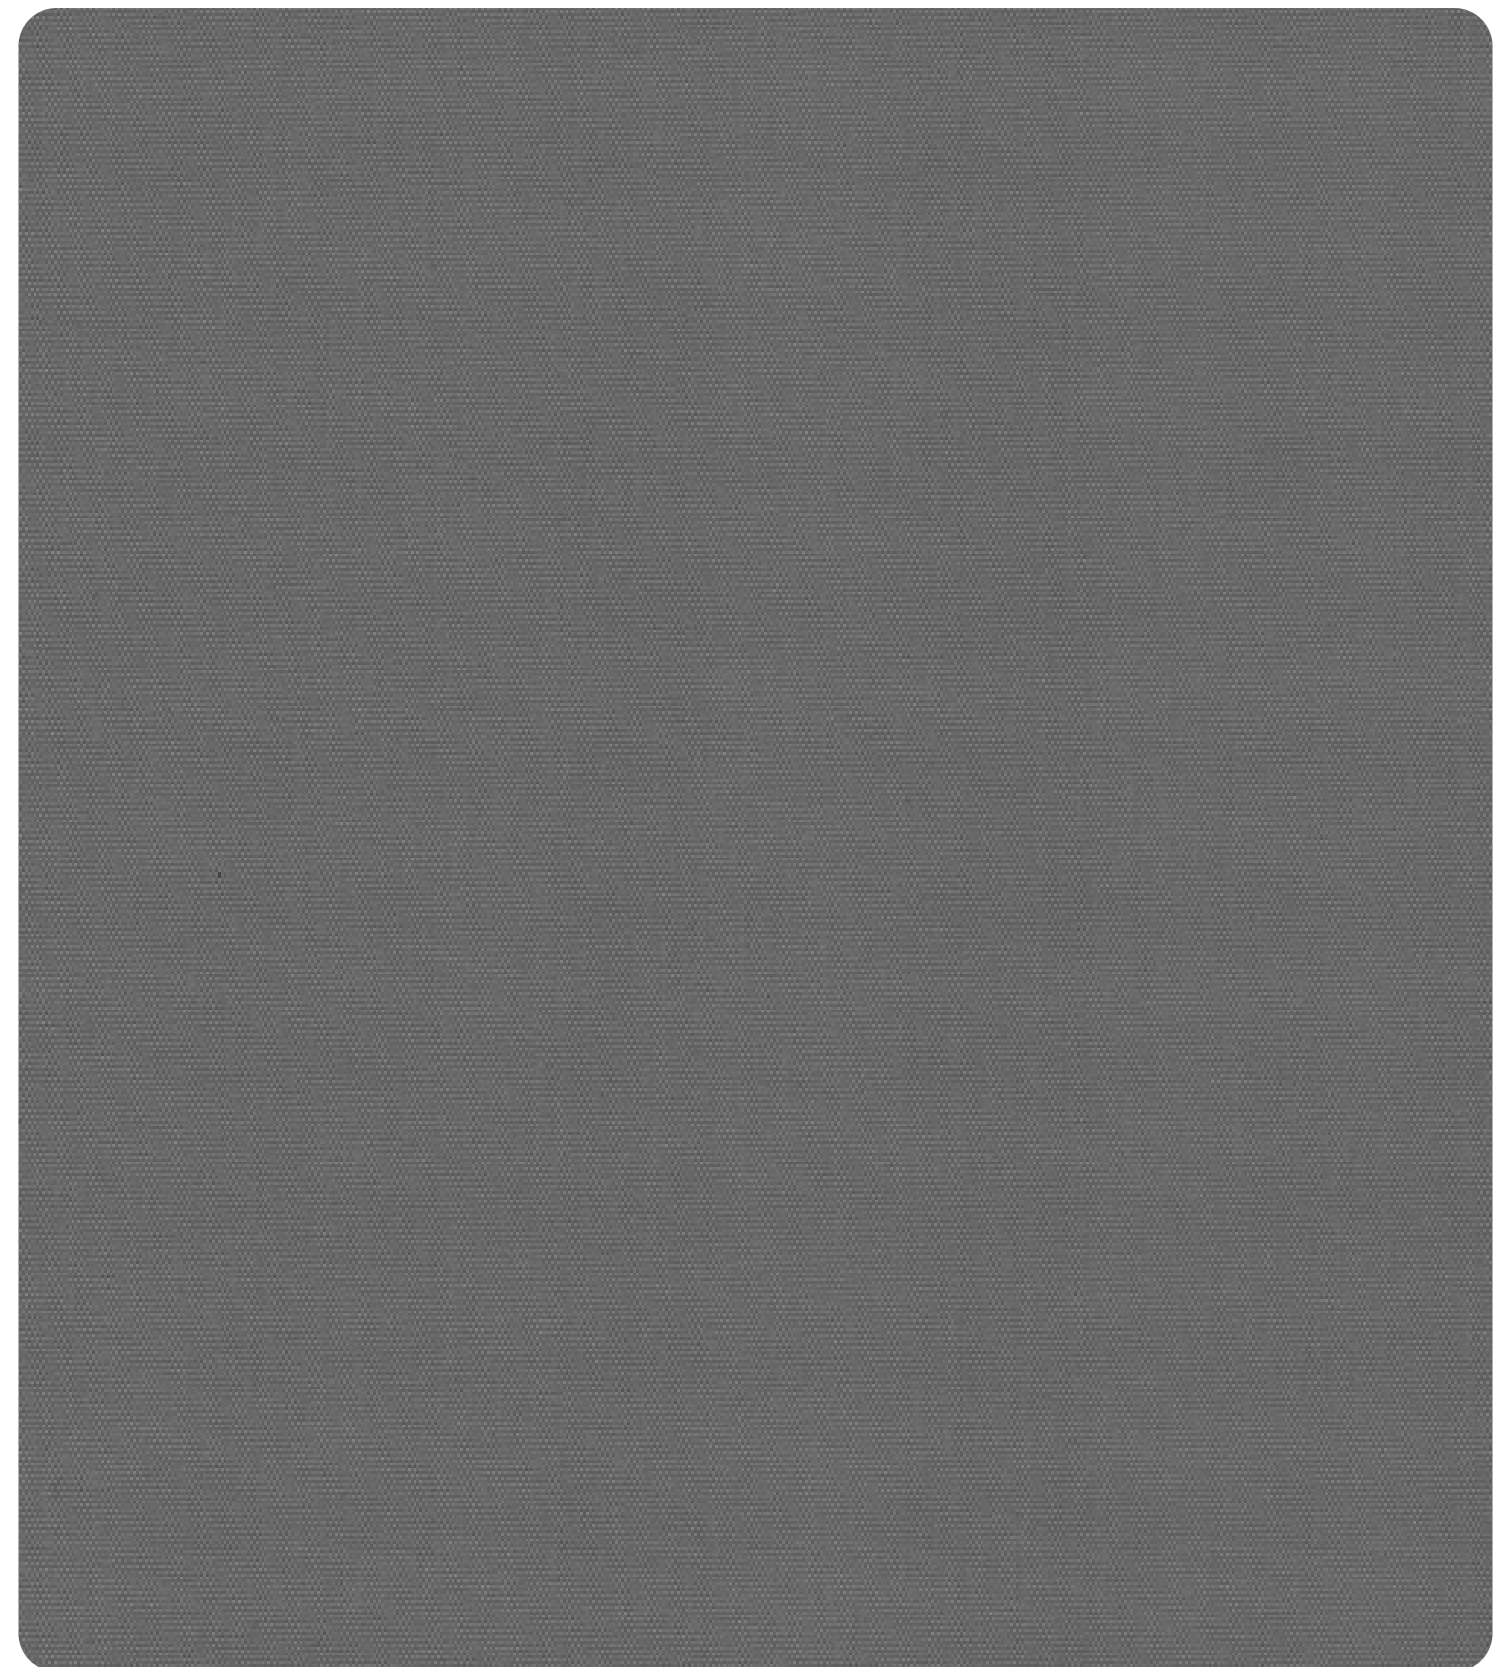


ASH 0-002-93-10498


SOUTH BEACH BLACKOUT DUPLEX

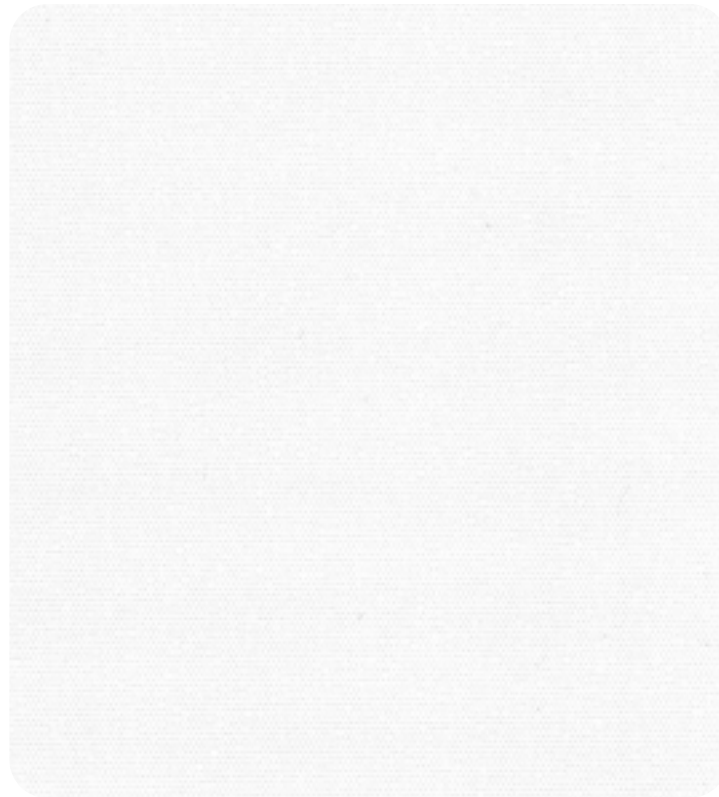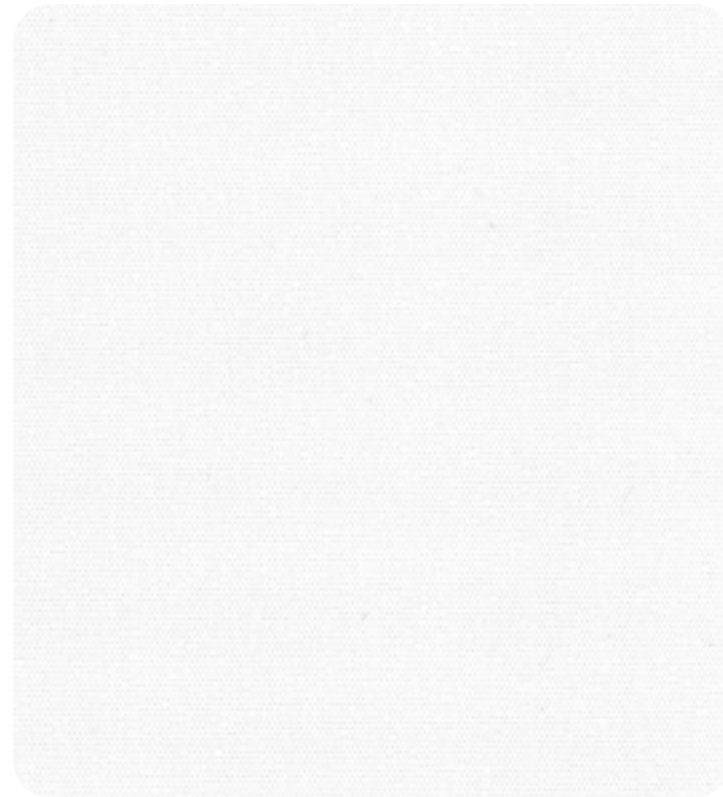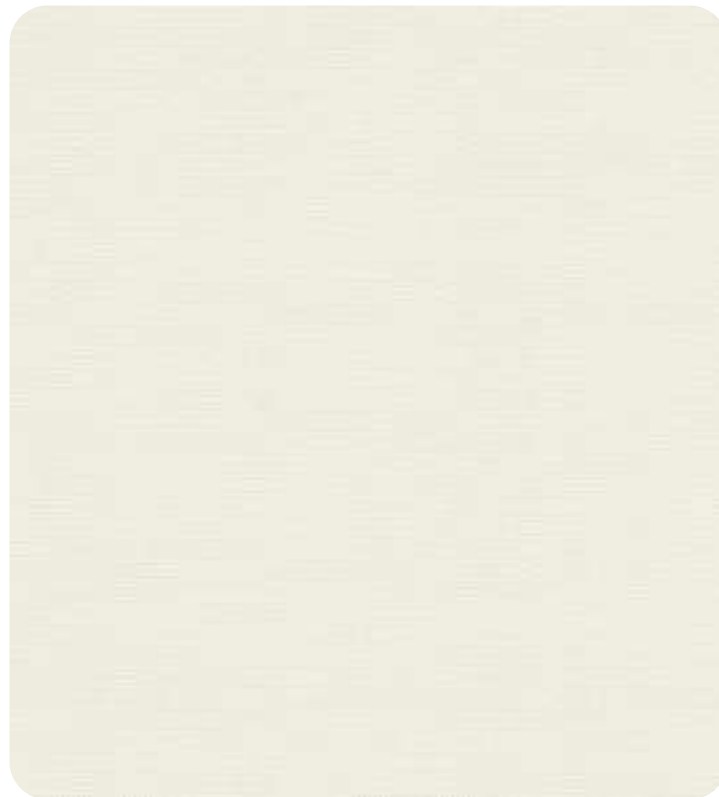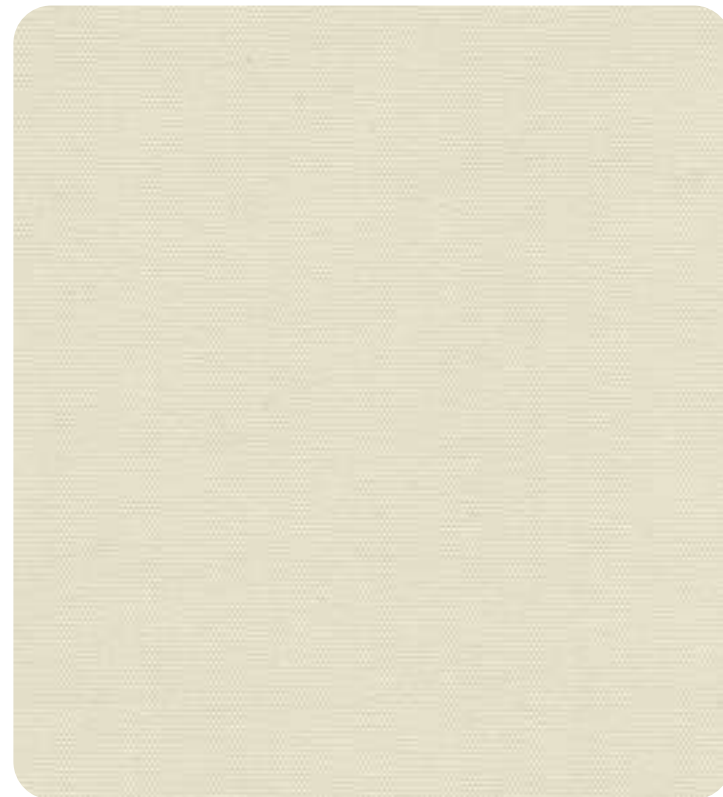**PURE WHITE** 0-002-93-01998**WHITE** 0-002-93-00198**IVORY** 0-002-93-10498**LINEN** 0-002-93-10398

SOUTH BEACH BLACKOUT DUPLEX

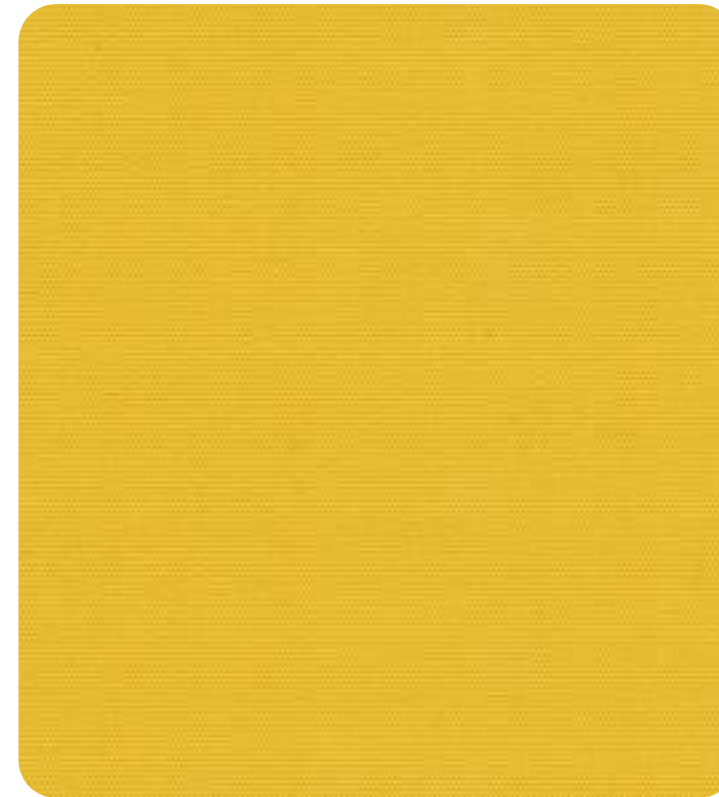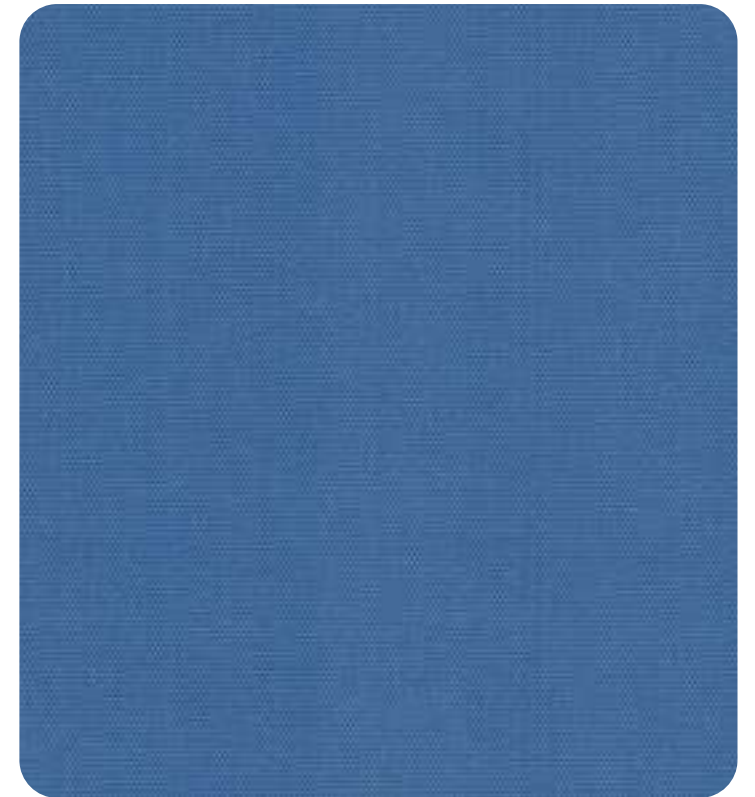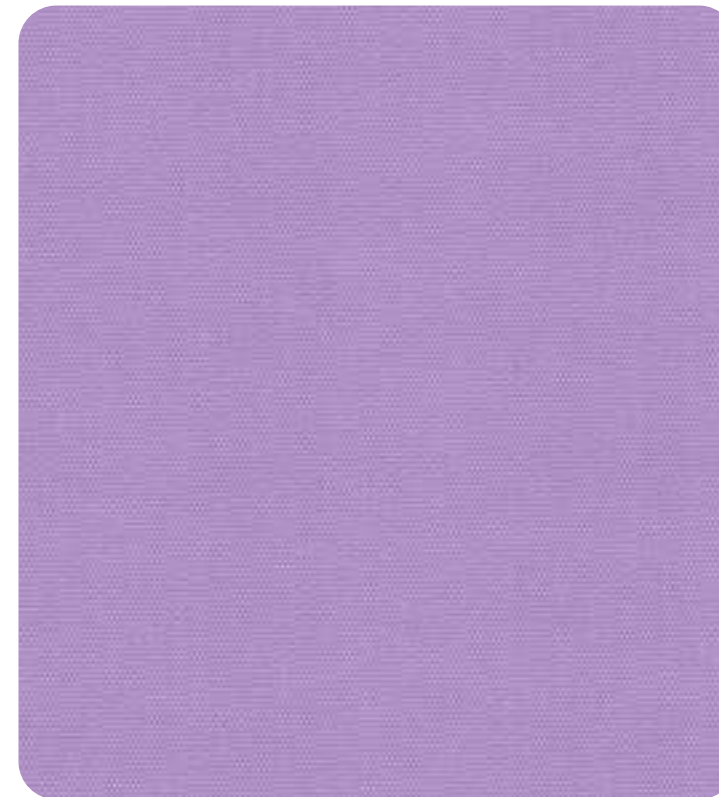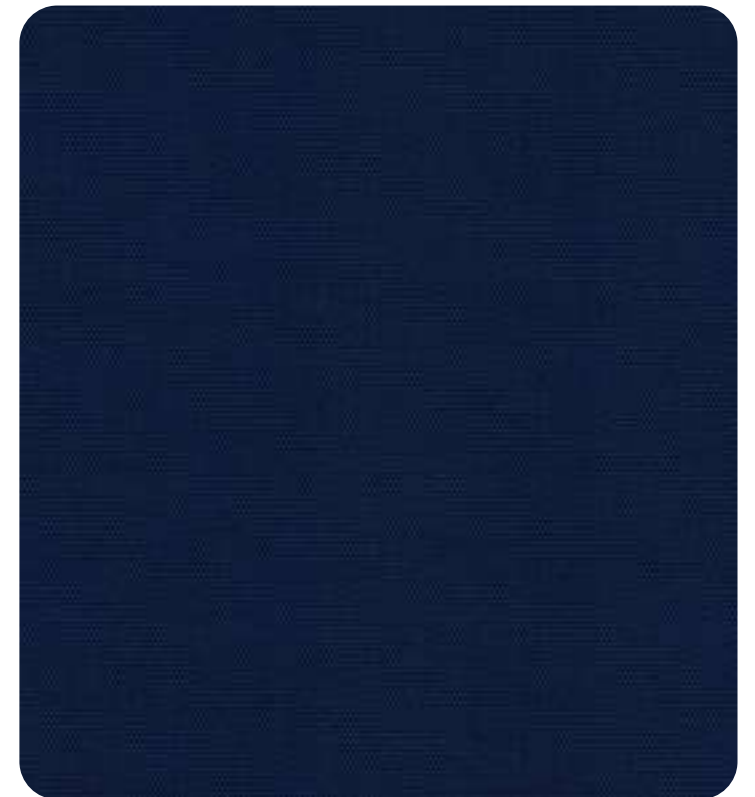**CANARY** 0-002-93-10798**ROYAL BLUE** 0-002-93-10898**LAVENDER** 0-002-93-10698**NAVY BLUE** 0-002-93-10998

SOUTH BEACH BLACKOUT DUPLEX

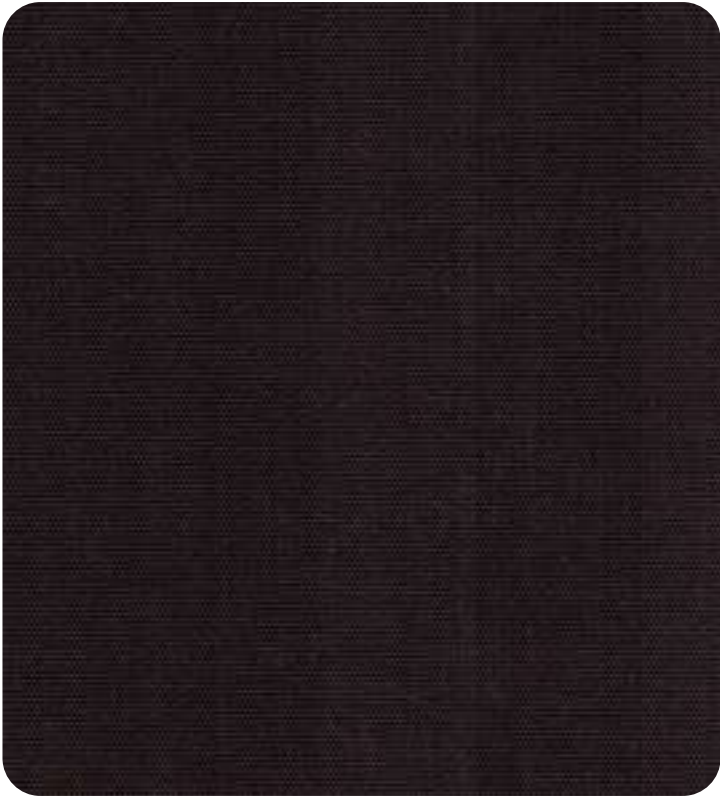

CHOCOLATE 0-002-93-10598



NIGHTFALL
SOUTH BEACH
BLACKOUT DUPLEX

TECHNICAL PROPERTIES

Composition	100% PES
Weight	375 g/m² ± 5% 11.06 oz/yd² ± 5%
Thickness	0.47 mm ± 5% 0.019 in ± 5%
Roll Width	2.5 m 98 in
Coating	Acrylic Foam Blackout Coating
UV Blockage	100%
Light Fastness	Class 4-5 (AATCC 16-2003)

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not use soap solution nor a damp cloth.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture

MANUFACTURING



Use Only on
Roll Direction



Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades



Sliding
Panels



Indoor Use
Only

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶




PINPOINTE BLACKOUT FR

The Ultimate Blackout Collection



COLECCIÓN BLACKOUT

PINPOINTE BLACKOUT FR

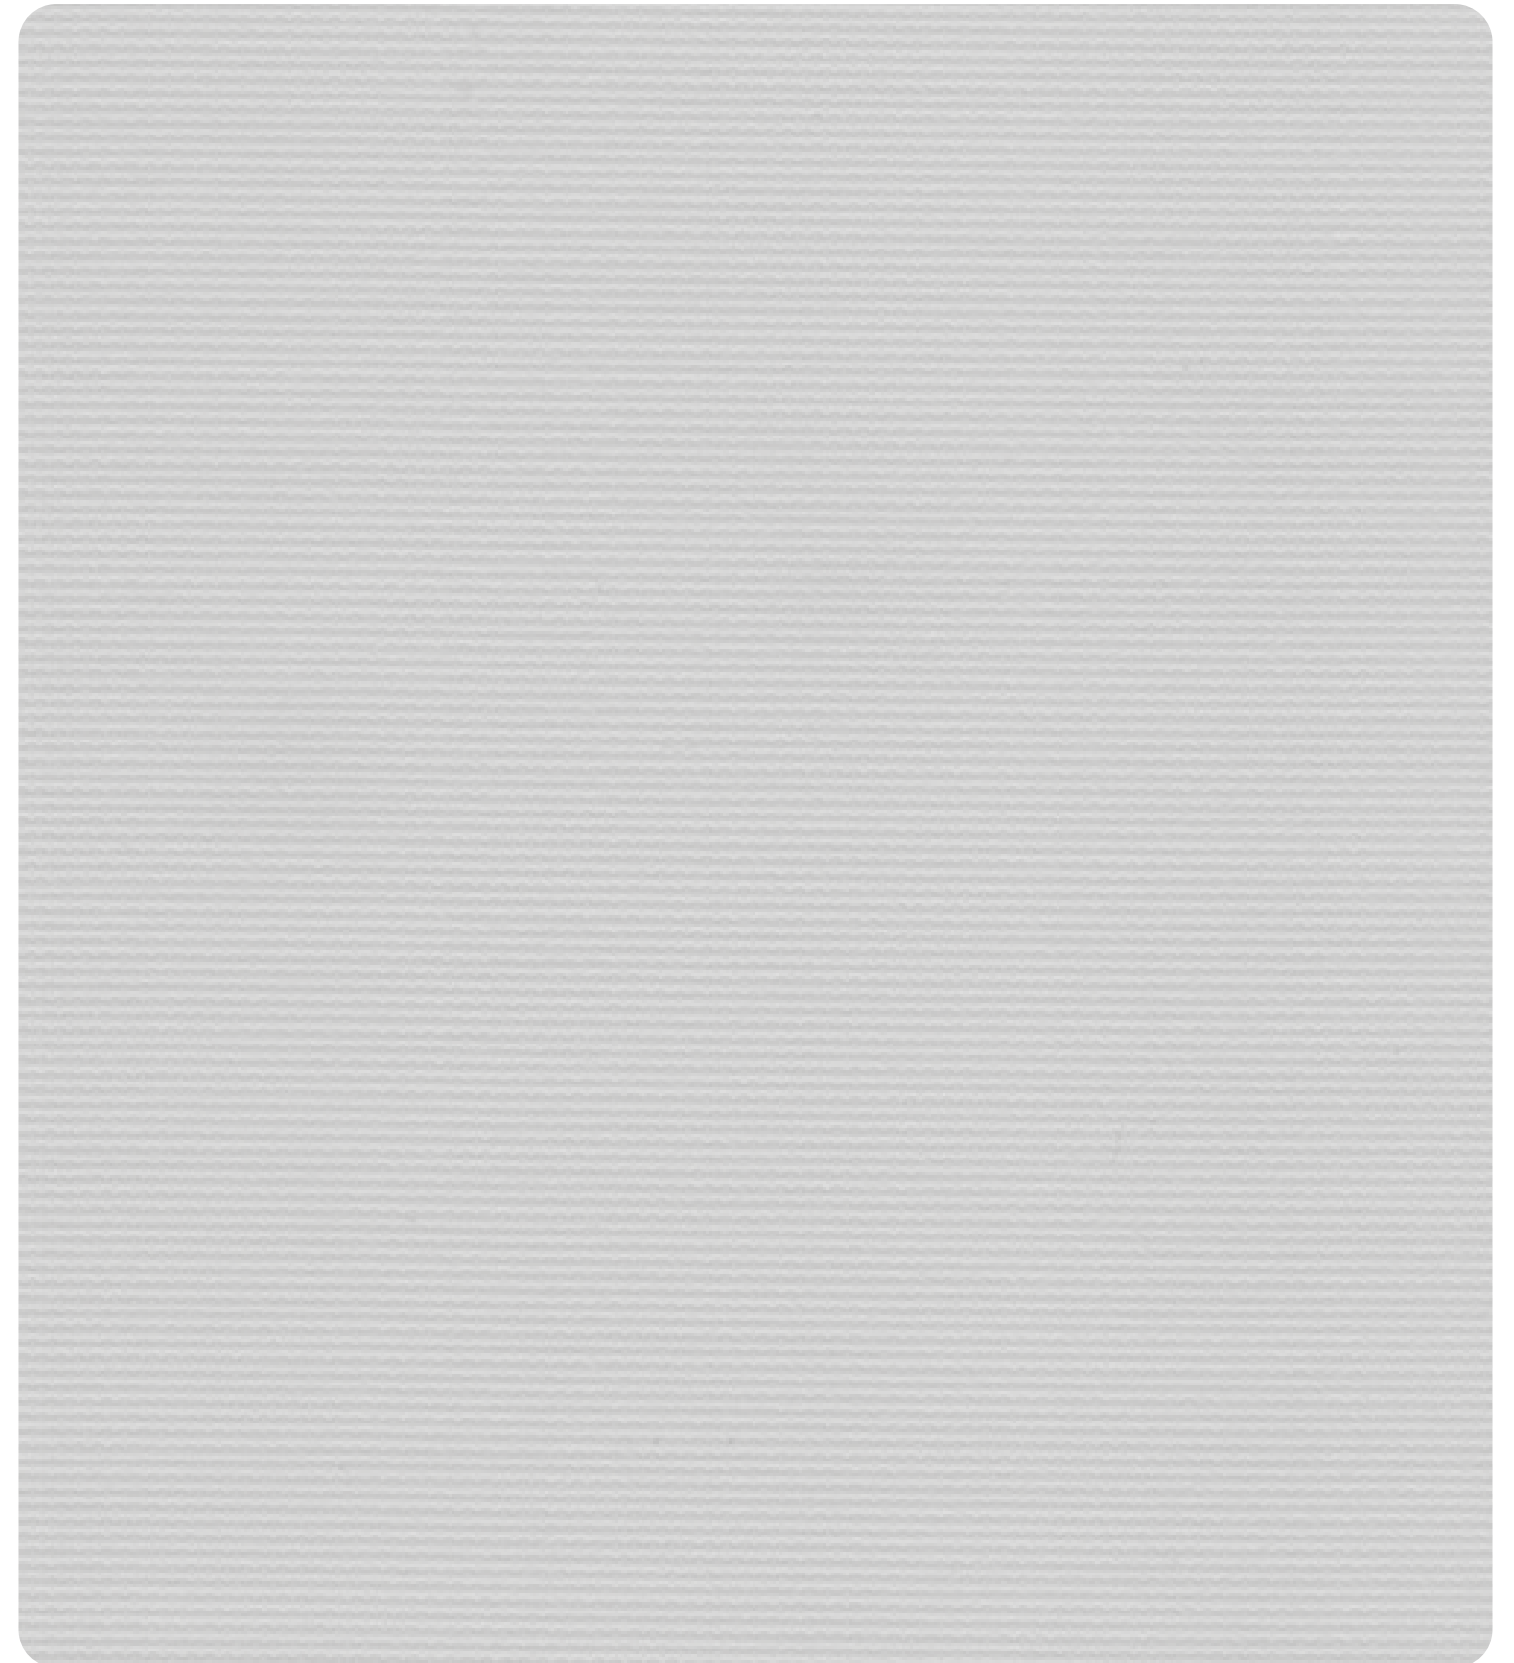

LIGHT GREY 0-002-63-91072


PINPOINTE BLACKOUT FR

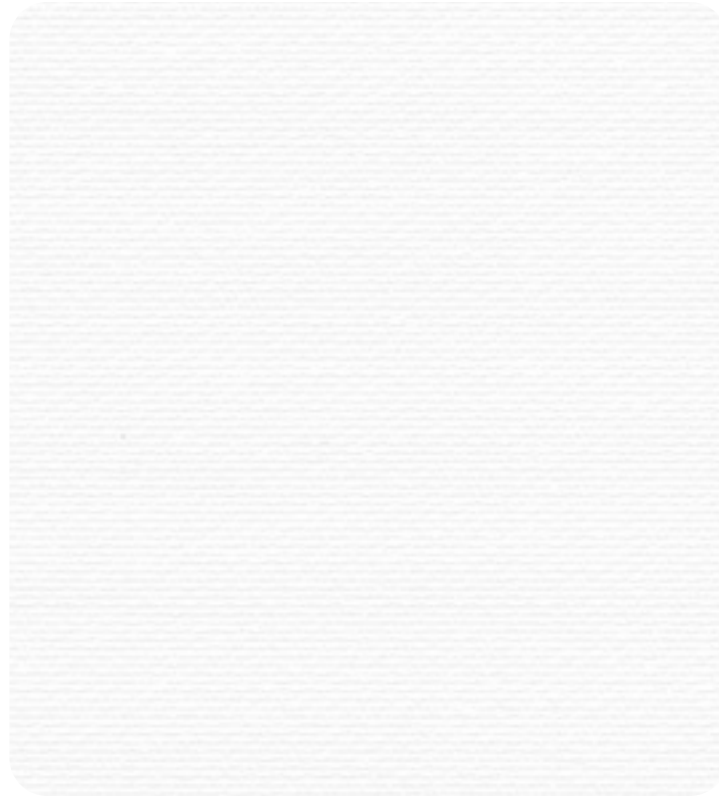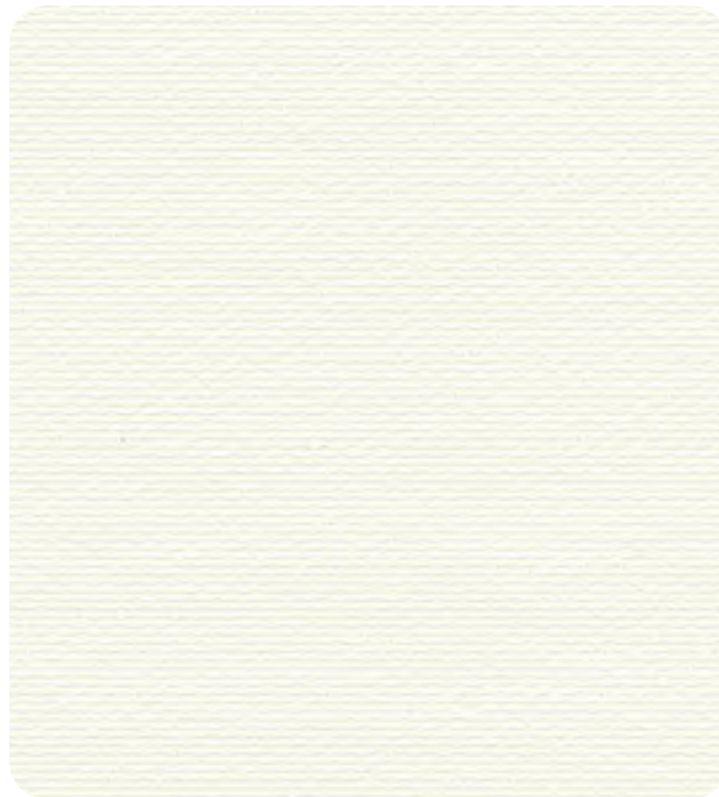**WHITE (SNOW FLAKES)** 0-002-63-90072**LINEN** 0-002-63-92672**IVORY** 0-002-63-96972**FAWN (OFF WHITE)** 0-002-63-93472

PINPOINTE BLACKOUT FR

**BEIGE (BISQUE)** 0-002-63-93372**ECRU (COPPER)** 0-002-63-92972**TAUPE** 0-002-63-99272**CHARCOAL** 0-002-63-92172

PINPOINTE BLACKOUT FR

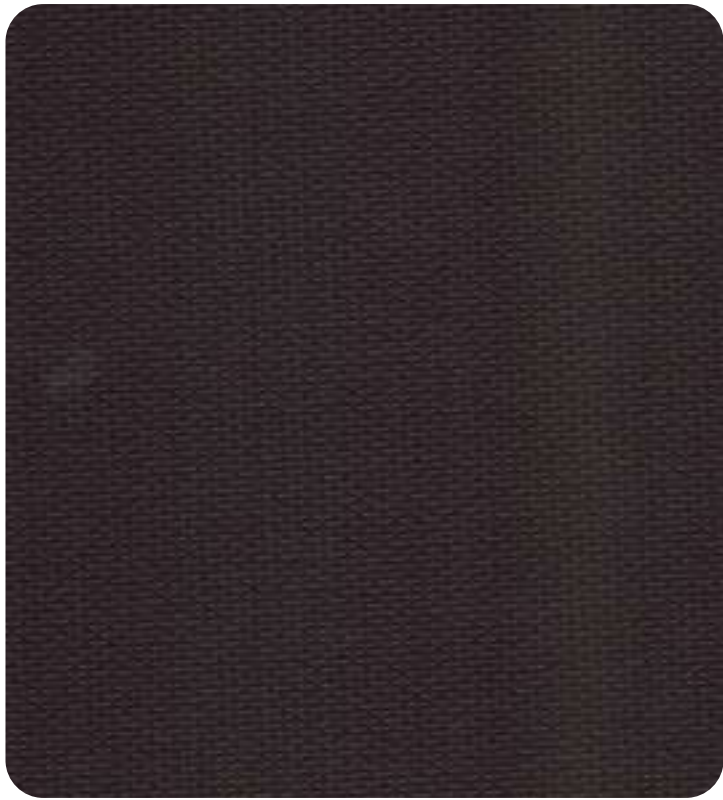

SABLE 0-002-63-92472



BLACK 0-002-63-93172



NIGHTFALL
PINPOINTE
BLACKOUT FR

TECHNICAL PROPERTIES

Composition	75% PVC + 25% Fiberglass
Weight	406 g/m² ± 5% 11.97 oz/yd² ± 5%
Thickness	0.38 mm ± 5% 0.015 in ± 5%
Roll Width	1.83 m 72 in
Adhesion	Inseparable PVC Films
UV Blockage	100%
Flame Retardant	NFPA 701

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Hand wash with cold water and a mild 5% detergent solution.
2. Wipe gently with a wet sponge.
3. Vacuum clean for regular maintenance.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.


INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

MANUFACTURING



Can be Railroaded
Ultrasonic Cut NOT Required

APPLICATIONS



Roller Shades
Sliding Panels
Indoor Use Only

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶



THE ROLLUX BOOK

COLECCIÓN BLACKOUT



Vertilux México



Copyright © 2021. Todos los derechos reservados.

THE ROLLUX BOOK

COLECCIÓN BLACKOUT



Queda prohibida la reproducción y/o edición parcial o total de este documento, ya sea en medios electrónicos, fotocopiado, escaneado o cualquier otro, sin el permiso previo y por escrito de Vertilux, así como Vertilux no se hace responsable por el mal uso de nuestro catálogo digital, el uso de copias en tejidos, mecanismos y perfiles de aluminio que no están avalados por la marca y todo uso de componentes ajenos invalida cualquier garantía parcial o total.

Copyright © 2021. Todos los derechos reservados.



THE ROLLUX BOOK

Tejidos para persianas enrollables

COLECCIÓN DECORATIVE

THE ROLLUX BOOK

COLECCIÓN DECORATIVE

76

DAKU

82

ASPEN FR

86

TOUAREG

90

XANDER

96

TOKIO DIM OUT

100

ROME

106

CLAIRE

112

SHANTUNG

118

MISTRAL

124

LINEN

128

NATURE

134

KENYA

140

SOUTH BEACH

148

TRIBECA FR

154

310 SILKEN

162

SPICE

166

550 CALICO

17
MODELOS

127
COLORES

Todos nuestros distribuidores trabajan con tejidos, componentes y motores VERTILUX si alguien te ofrece un producto diferente al que deseas o un producto que no es VERTILUX repórtalo, la satisfacción de nuestros clientes es primero.




DAKU

DECO-STYLES


COLECCIÓN DECORATIVE

DAKU

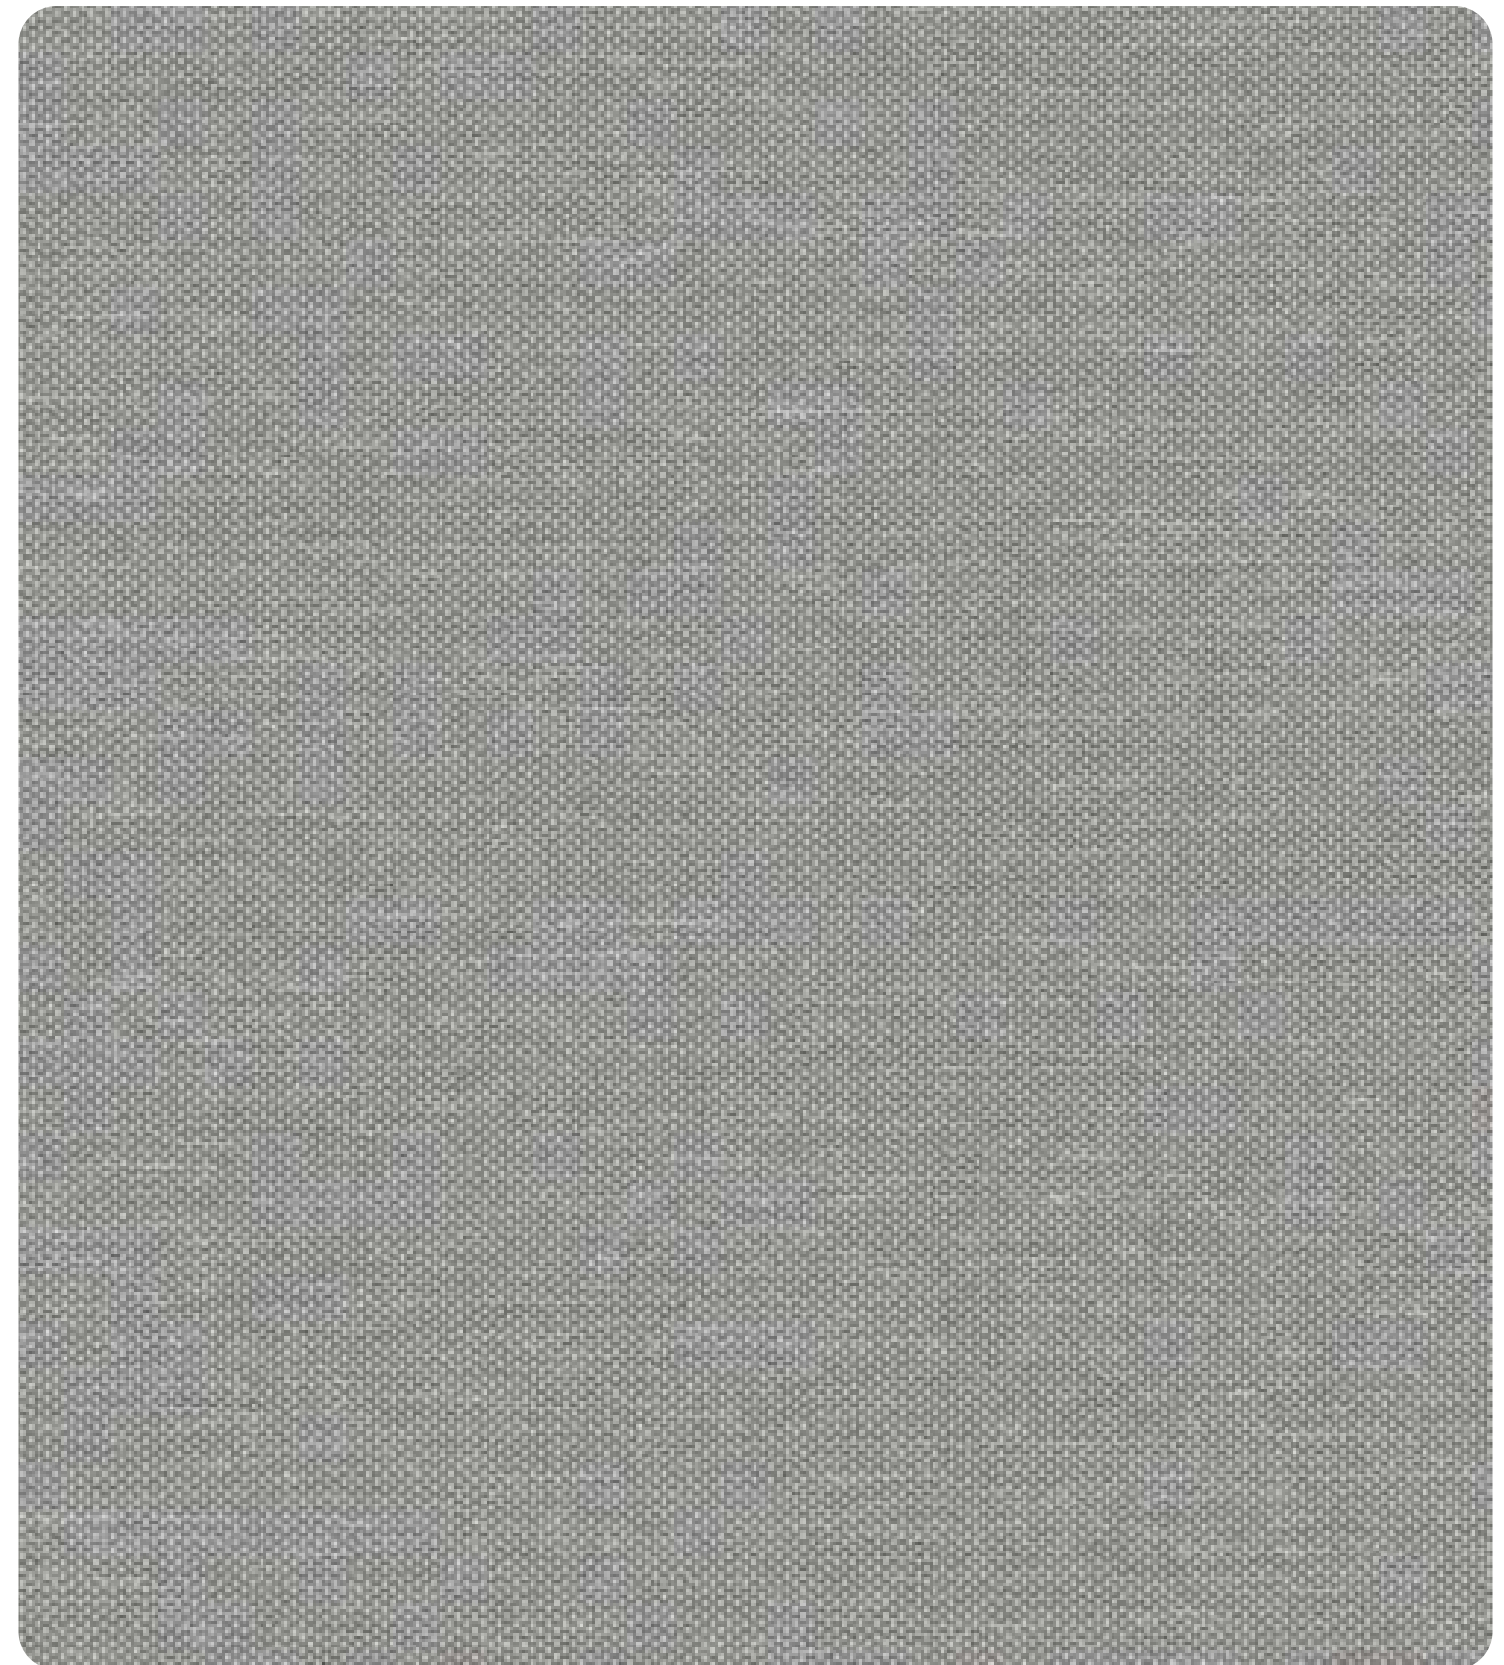

SILVER 0-002-A9-00400

DAKU

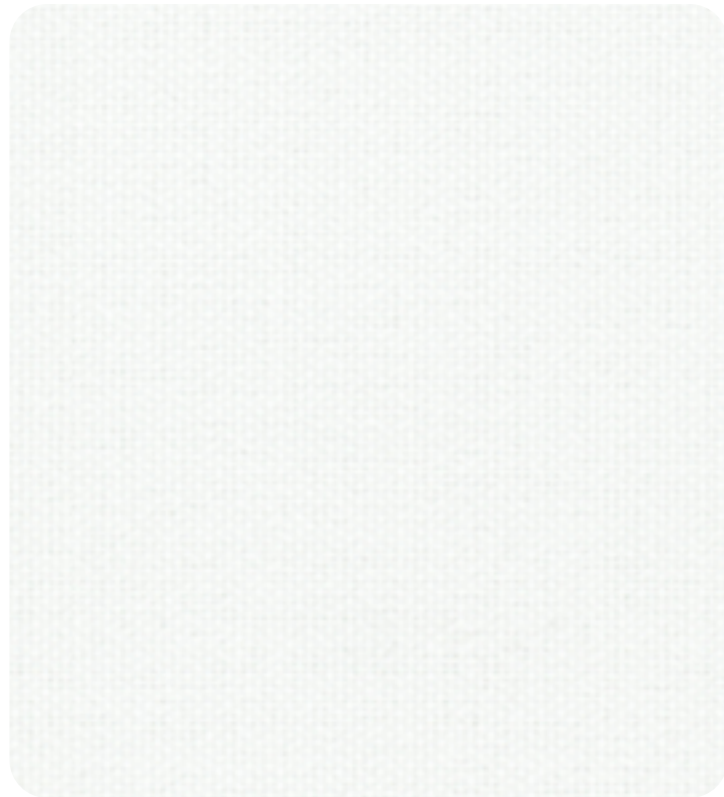

WHITE 0-002-A9-00100



MARENGO 0-002-A9-00600



GREY 0-002-A9-00300



BEIGE 0-002-A9-00200

DAKU



BROWN 0-002-A9-00500

Blackout

Decorative

Vision

Sheerlux

DECO-STYLES DAKU

[INICIO](#)

TECHNICAL PROPERTIES

Composition	100% PES
Weight	212 g/m² ± 5%
Thickness	0.42 mm ± 5%
Roll Width	2.65 m
UV Blockage	100 %
Light Fastness (Xenotest grade)	Coated Side: 6/8

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not rub
4. Do not steam.
5. Do not dry clean.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

SUN CONTROL PROPERTIES

COLOR	Tv (%)	Rv (%)	Av (%)
White	32	52	16
Beige	24	39	37
Grey	16	27	57
Silver	16	23	63
Brown	15	21	64
Marengo	12	18	70

MANUFACTURING



Use Only on
Roll Direction



Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades



Sliding
Panels



Indoor Use
Only

Visita nuestro blog

Ideas para tu espacio

[Ir ahora ▶](#)

vertilux.mx



THE ROLLUX BOOK

COLECCIÓN DECORATIVE

Vertilux México



Copyright © 2021. Todos los derechos reservados.




ASPEN FR

URBAN-CHIC


COLECCIÓN DECORATIVE

ASPEN FR

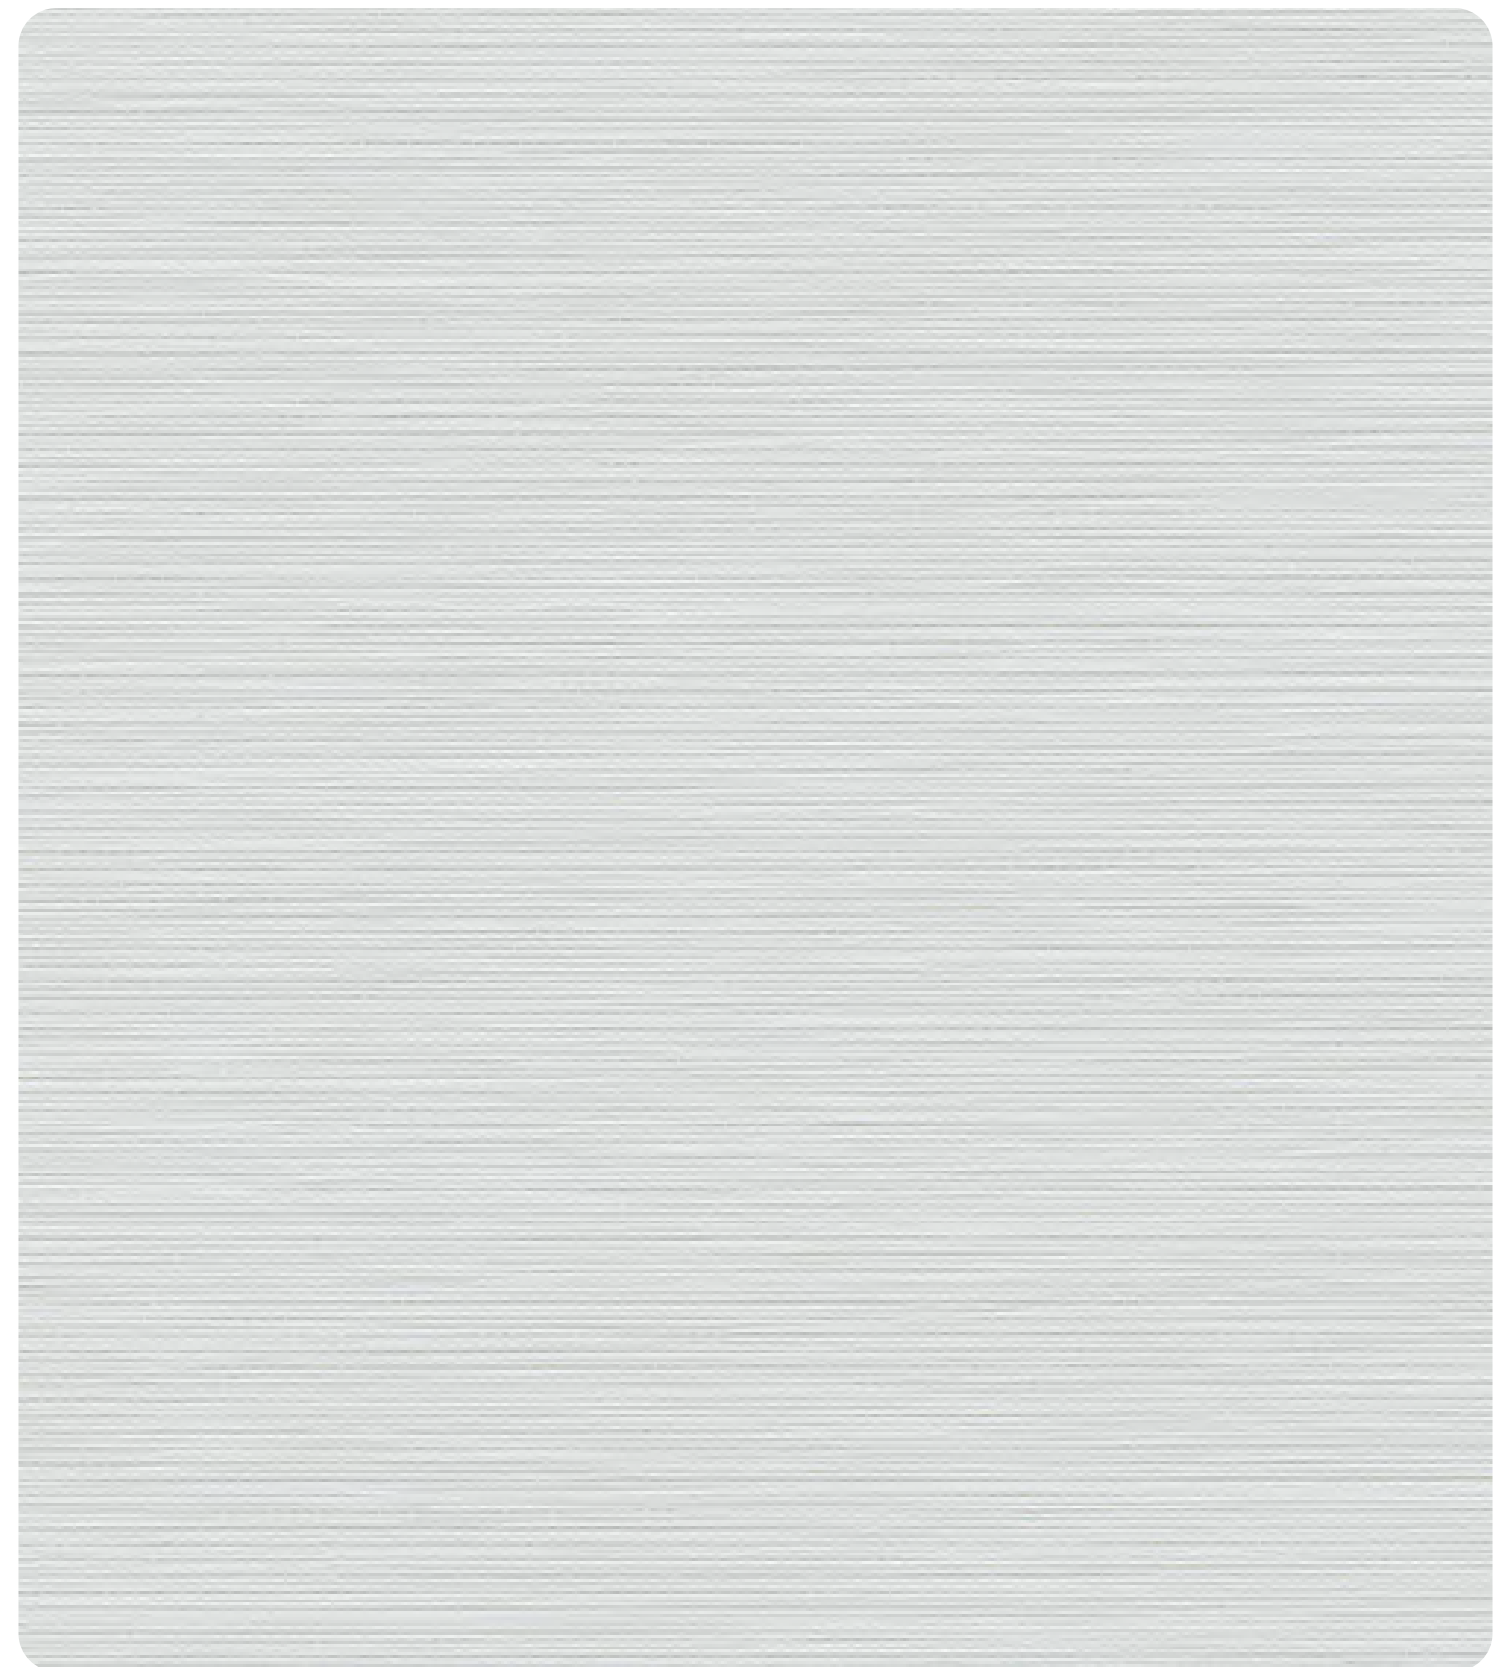

ICE 0-002-05-00200

ASPEN FR

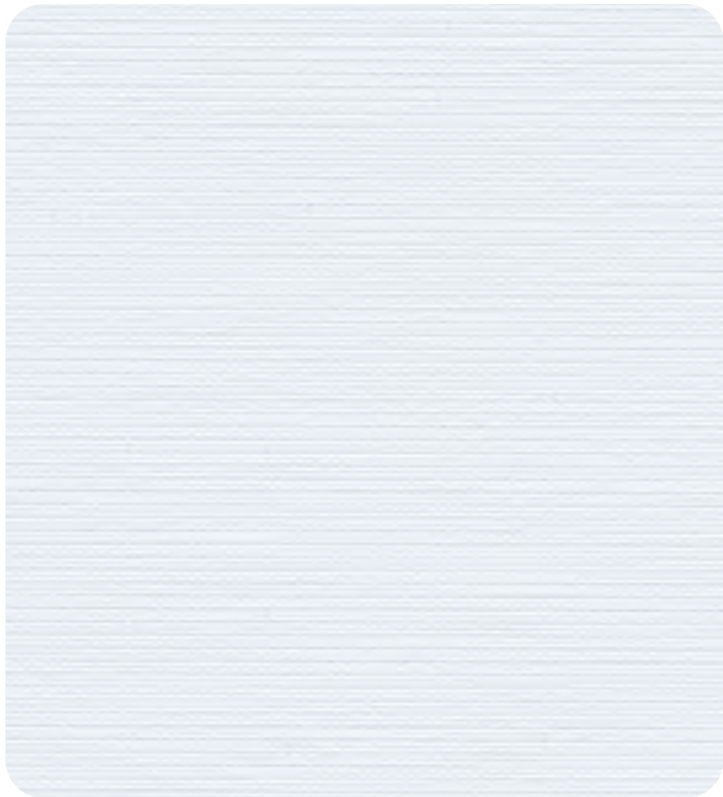

WHITE 0-002-05-00100



MUSHROOM 0-002-05-00300



GREIGE 0-002-05-00400



URBAN-CHIC
ASPEN FR

TECHNICAL PROPERTIES

Composition	100% PES
Weight	194.8 g/m² ± 5% 5.74 oz/yd² ± 5%
Thickness	0.33 mm ± 5% 0.012 in ± 5%
Roll Width	2.8 m 110.2 in
Roll Length	40 m 43.74 yd
Tensile Strength	Warp: 120 daN Weft: 1400 daN
Light Fastness	4 Xenotest Grade

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.



- ✓ PBBs Free
- ✓ PBDEs Free
- ✓ Lead Free
- ✓ Cadmium Free
- ✓ Mercury Free
- ✓ Chromium Free

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order.

SUN CONTROL PROPERTIES*

UPF	+50 UV-A: 0.1% UV-B: 0.1%
UV-R Blocking	99.9%
UV-A Blocking	99.9%
UV-B Blocking	99.9%
Transmittance (Ts)	1.5%
Reflectance (Rs)	13.9%
Absorption (As)	84.6%

MANUFACTURING



Use Only on Roll Direction Ultrasonic Cut NOT Required

APPLICATIONS



Roller Shades Sliding Panels Indoor Use Only

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶




TOUAREG

DECO-STYLES


COLECCIÓN DECORATIVE

TOUAREG

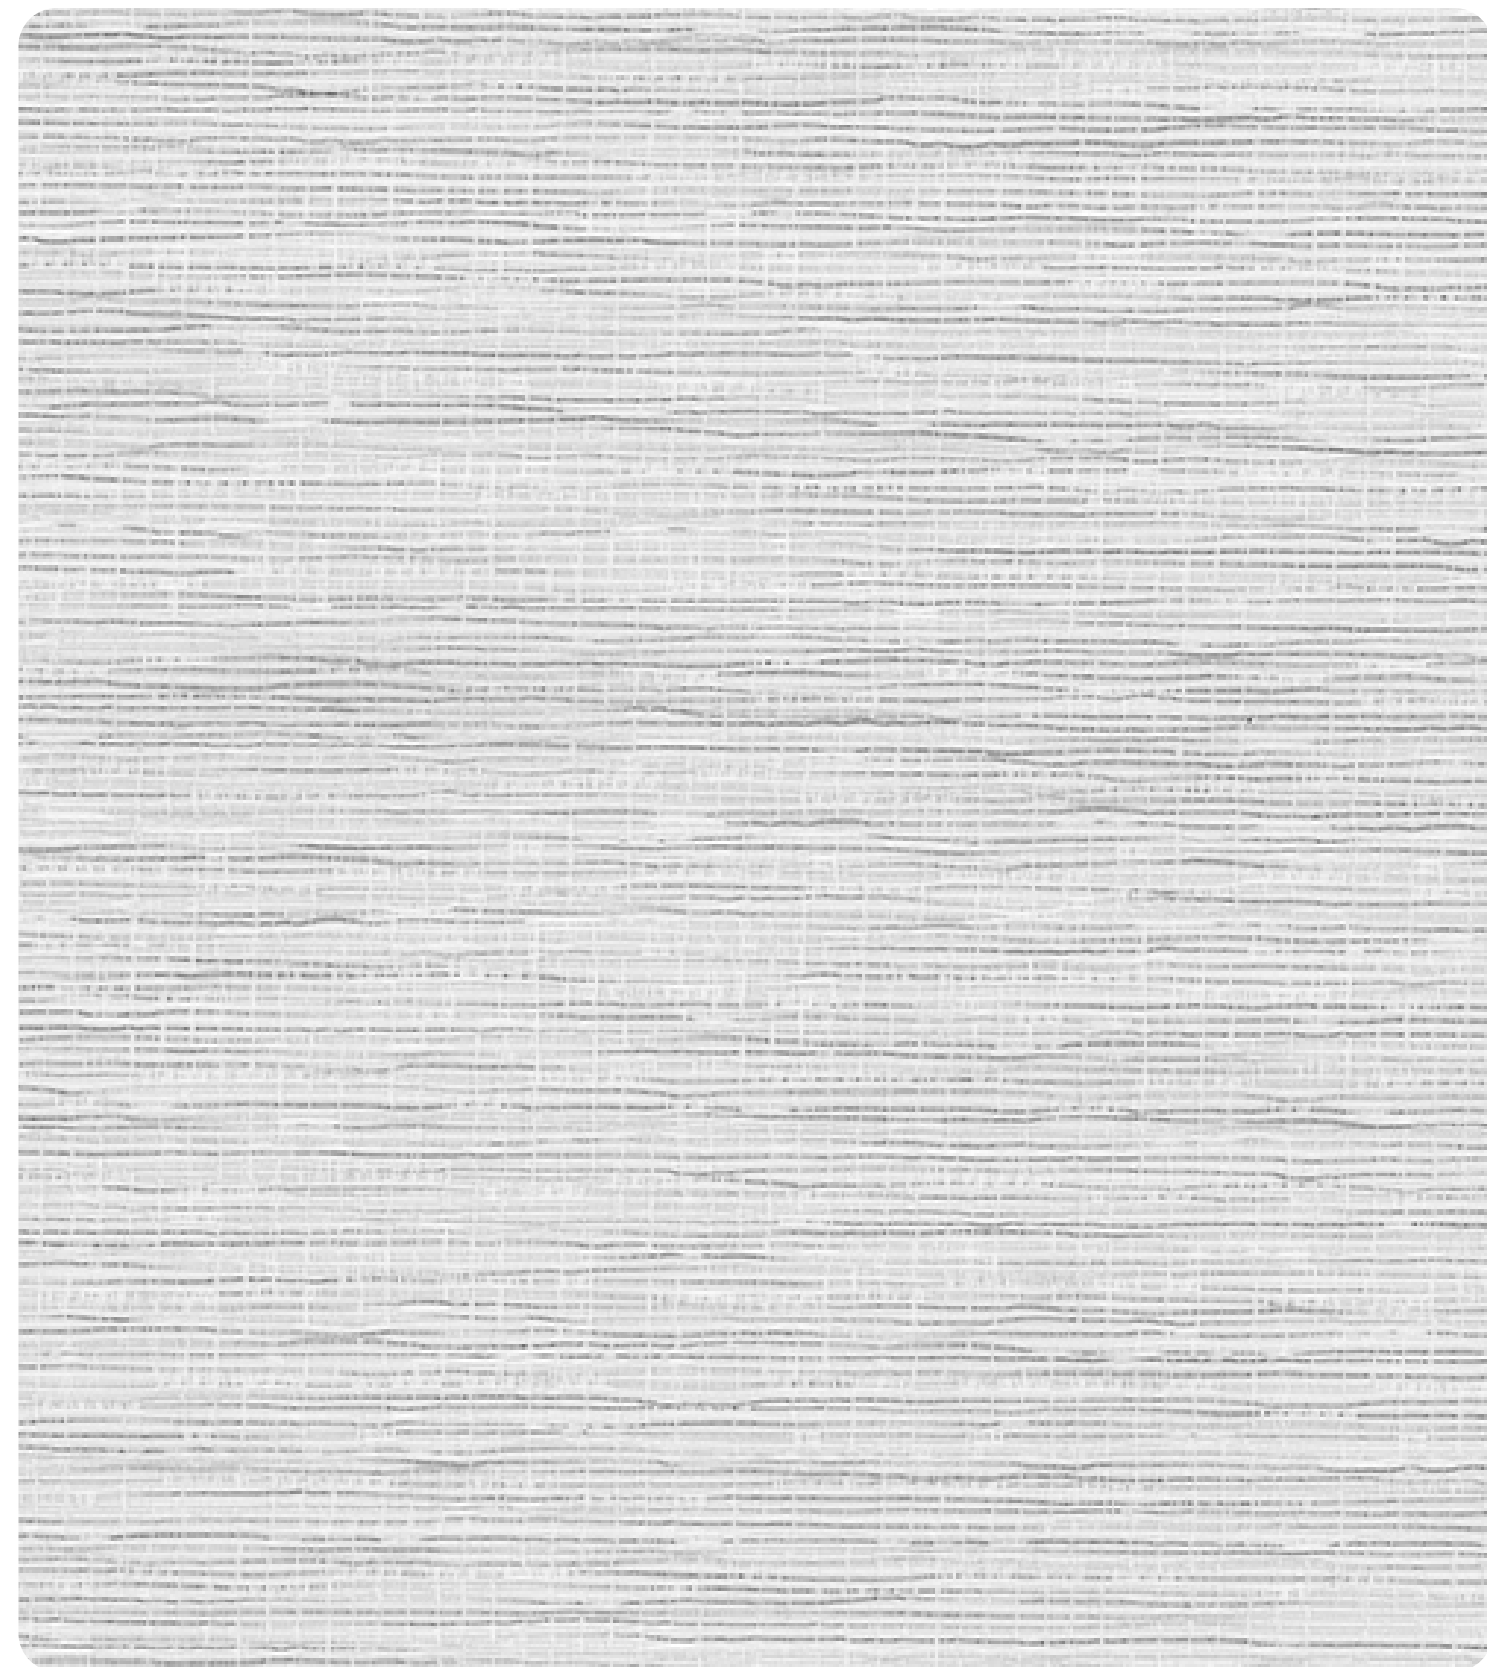

GREY 0-002-16-00998

TOUAREG

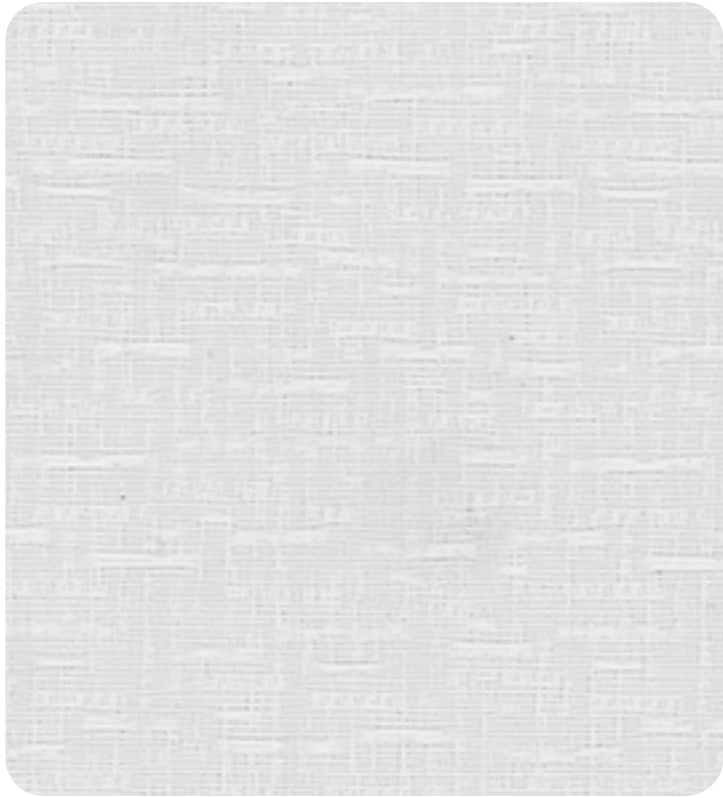

WHITE 0-002-16-00198



BEIGE 0-002-16-00298



SAND 0-002-16-00498



STONE 0-002-16-01698



DECO-STYLES
TOUAREG

TECHNICAL PROPERTIES

Composition	100% PES
Weight	White: 275 g/m ² ± 10% 8.11 oz/yd ² ± 10% Other Colors: 308 g/m ² ± 10% 9.08 oz/yd ² ± 10%
Thickness	White: 0.5 mm ± 5% 0.020 in ± 5% Other Colors: 0.6 mm ± 5% 0.024 in ± 5%
Roll Width	2.5 m 98 in
Light Fastness	> 6 Xenotest Grade

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Wipe gently with a wet sponge.
3. Do not wash.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)
Beige	15	43	42
Grey	24	55	21
Sand	18	45	37
Stone	13	40	47
White	30	60	10

MANUFACTURING



Use Only on
Roll Direction

Ultrasonic Cut
NOT Required

APPLICATIONS



Visita nuestro blog

Ideas para tu espacio

Ir ahora ►




XANDER

DECO-STYLES

COLECCIÓN DECORATIVE

XANDER

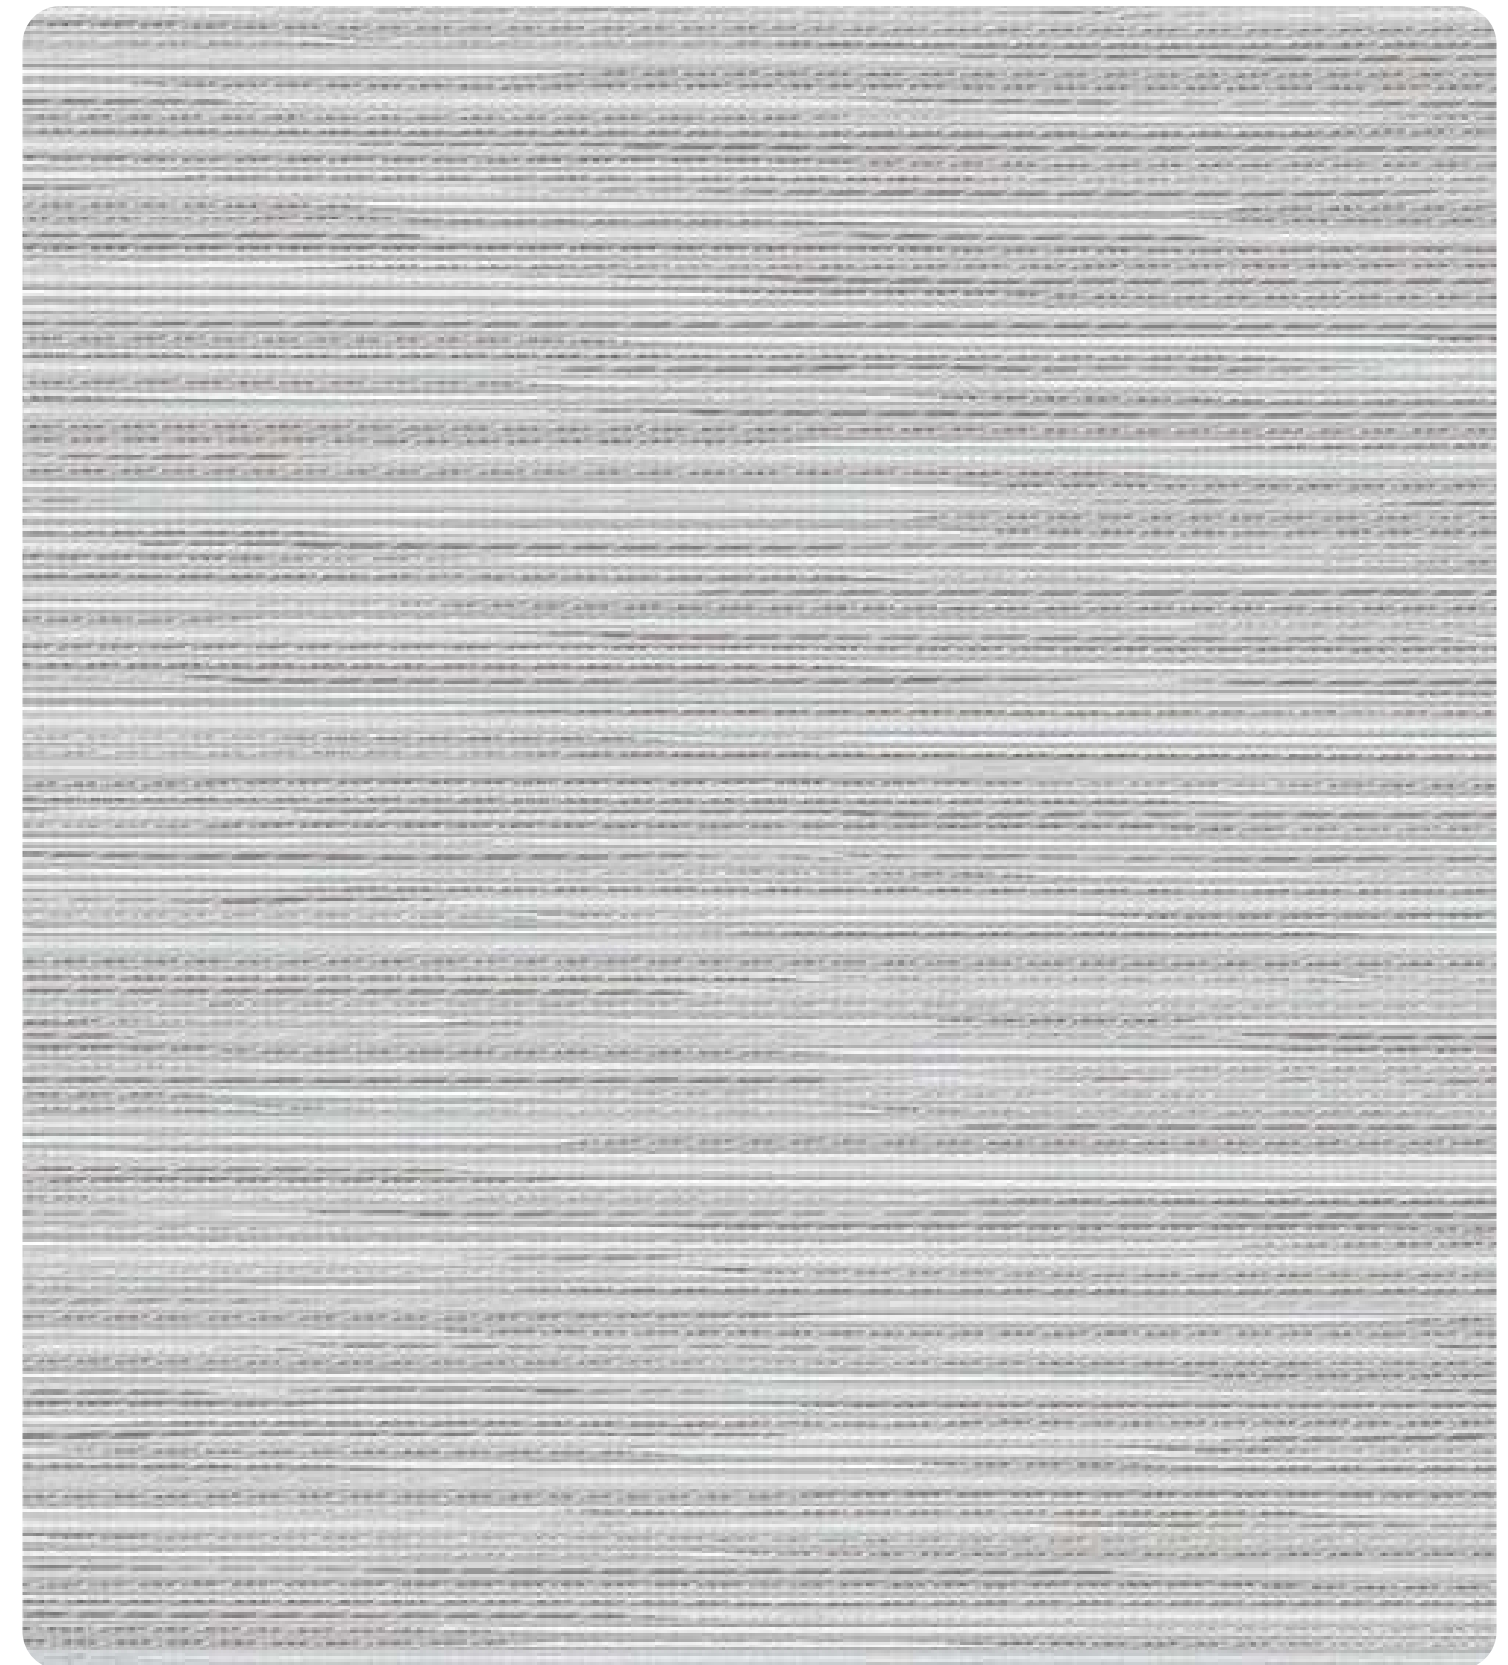


GREY 0-002-89-00400

XANDER

**WHITE** 0-002-89-00100**OFF WHITE** 0-002-89-00200**IVORY** 0-002-89-00300**SAND** 0-002-89-00500

XANDER

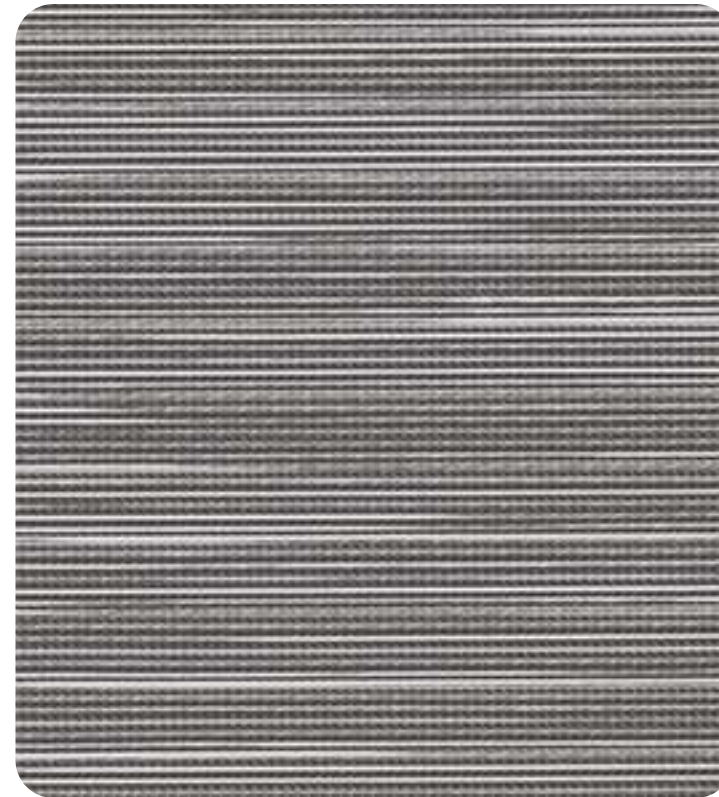**CHARCOAL** 0-002-89-00600

DECO-STYLES XANDER



TECHNICAL PROPERTIES

Composition	100% PES
Weight	187.50 g/m ² ± 5% 5.53 oz/yd ² ± 5%
Thickness	0.70 mm ± 5% 0.027 in ± 5%
Roll Width	2.8 m 110.2 in
Roll Length	40 m 43.74 yd
Tensile Strength	Weft: 2753.0 daN/5cm
Tearing Strength	Weft: 41.7 daN
Light Fastness	4.5 Xenotest Grade

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.



- ✓ PBBs Free
- ✓ PBDEs Free
- ✓ Lead Free
- ✓ Cadmium Free
- ✓ Mercury Free
- ✓ Chromium Free

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order.

SUN CONTROL PROPERTIES*

UPF	50+ UV-A: 6.2% UV-B: 1.1%
UV-R Blocking	95.3%
UV-A Blocking	93.8%
UV-B Blocking	98.9%
Transmittance (Ts)	23.4%
Reflectance (Rs)	55.6%
Absorption (As)	21.0%

MANUFACTURING



Use Only on
Roll Direction



Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades



Sliding
Panels



Indoor Use
Only

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶



THE ROLLUX BOOK




TOKIO DIM OUT

URBAN-CHIC


COLECCIÓN DECORATIVE

TOKIO DIM OUT

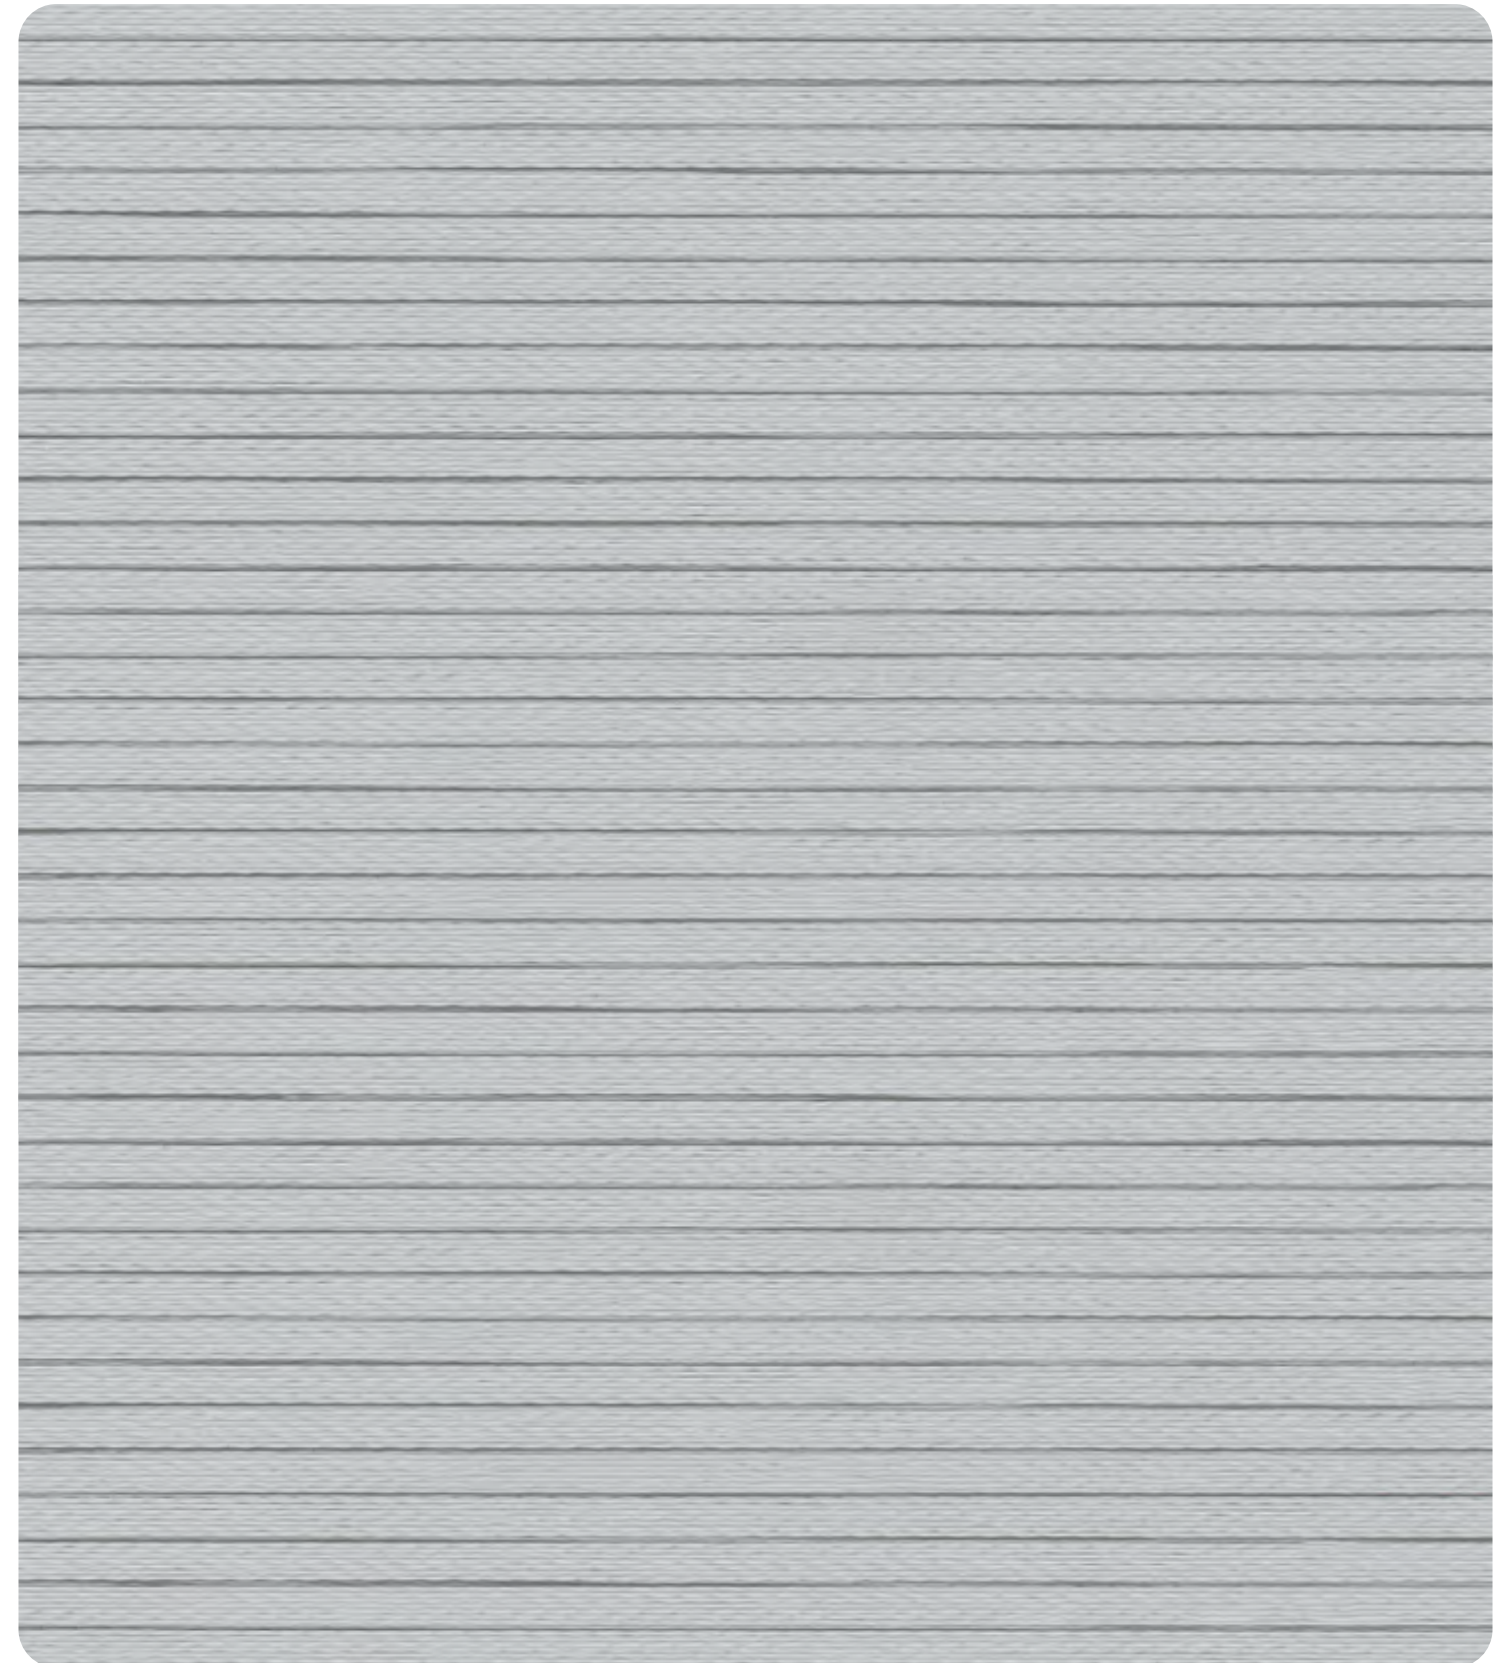

SNOW GREY 0-002-85-00100

TOKIO DIM OUT

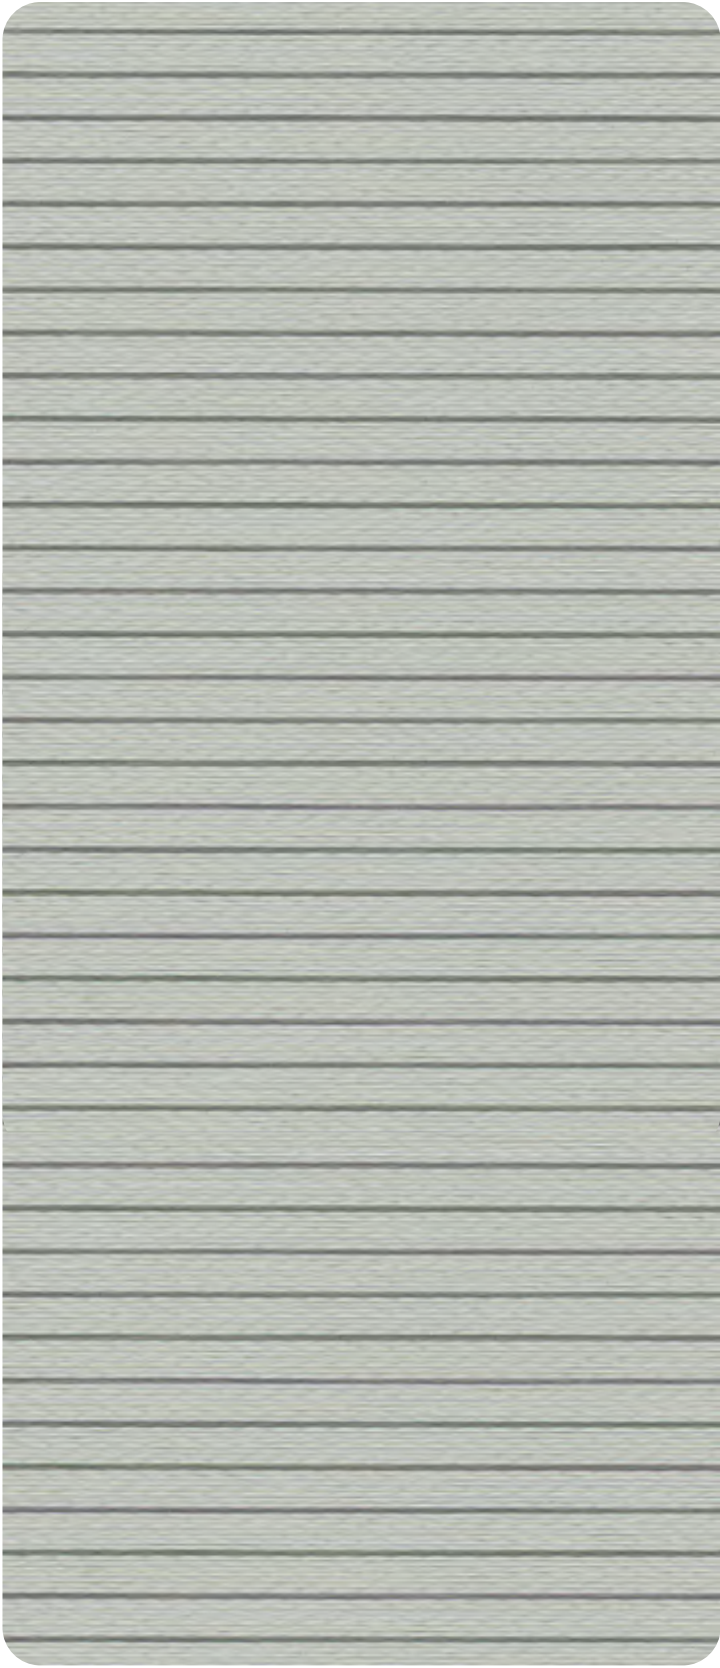

IVORY 0-002-85-00200



BEIGE 0-002-85-00300



URBAN-CHIC
TOKIO DIM OUT

TECHNICAL PROPERTIES

Composition	100% PES
Weight	245 g/m² ± 5% 7.22 oz/yd² ± 5%
Thickness	0.45 mm ± 5% 0.017 in ± 5%
Roll Width	2.8 m 110.2 in
Roll Length	40 m 43.74 yd
Tensile Strength	Weft: 430 daN/5cm
Tearing Strength	Weft: 0.5 daN
Light Fastness	Above 4 Xenotest Grade

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.



IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order.

SUN CONTROL PROPERTIES*

UPF	50+ UV-A: 0.3% UV-B: 0.1%
UV-R Blocking	99.8%
UV-A Blocking	99.7%
UV-B Blocking	99.9%
Transmittance (Ts)	0.7%
Reflectance (Rs)	40.2%
Absorption (As)	59.1%

MANUFACTURING



- Use Only on
Roll Direction
- Ultrasonic Cut
NOT Required


APPLICATIONS



Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶

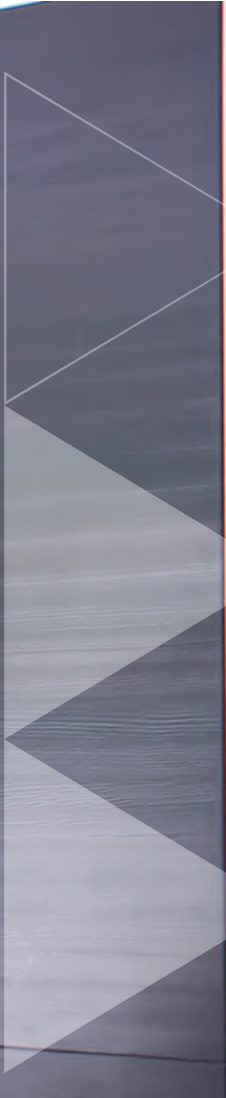

ROME

DECO-STYLES




COLECCIÓN DECORATIVE

ROME




IVORY 0-002-86-02106

ROME

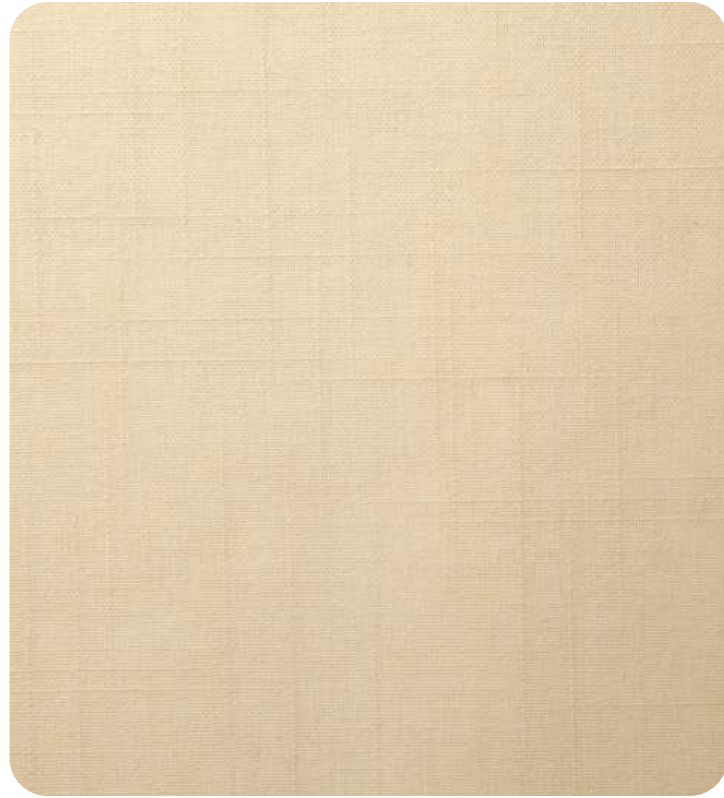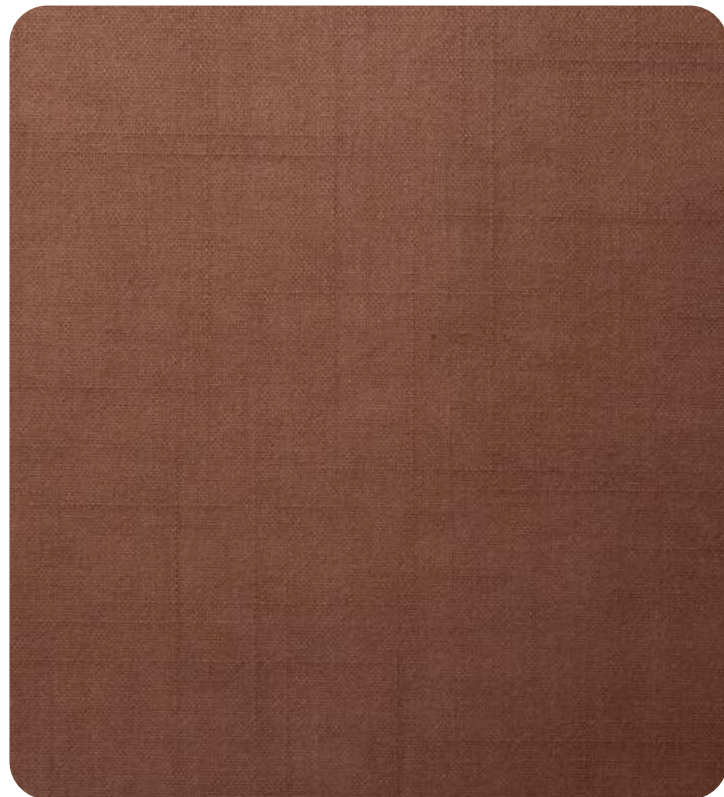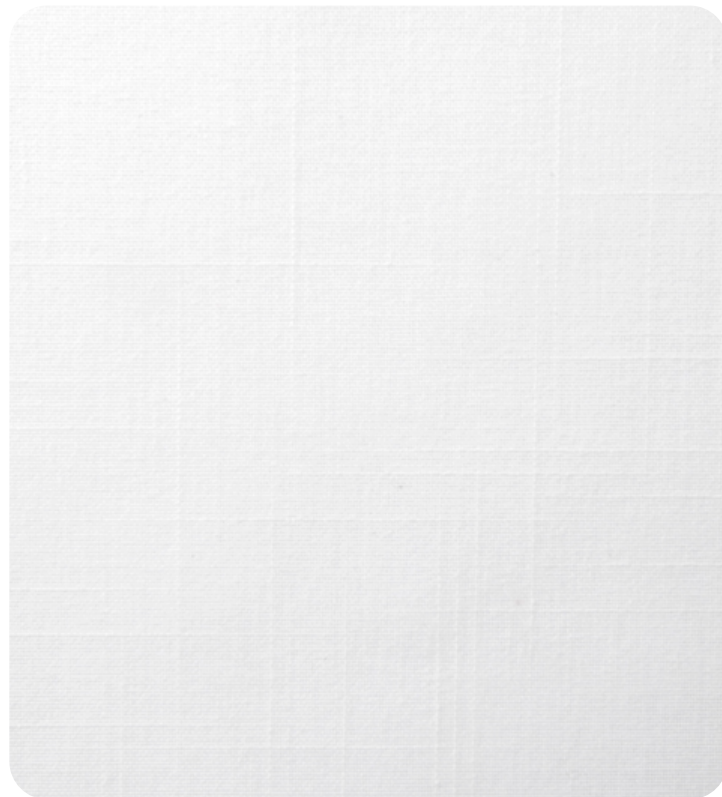**DESERT** 0-002-86-03106**TAN** 0-002-86-04106**BROWN** 0-002-86-09106**COTTON** 0-002-86-01106

ROME

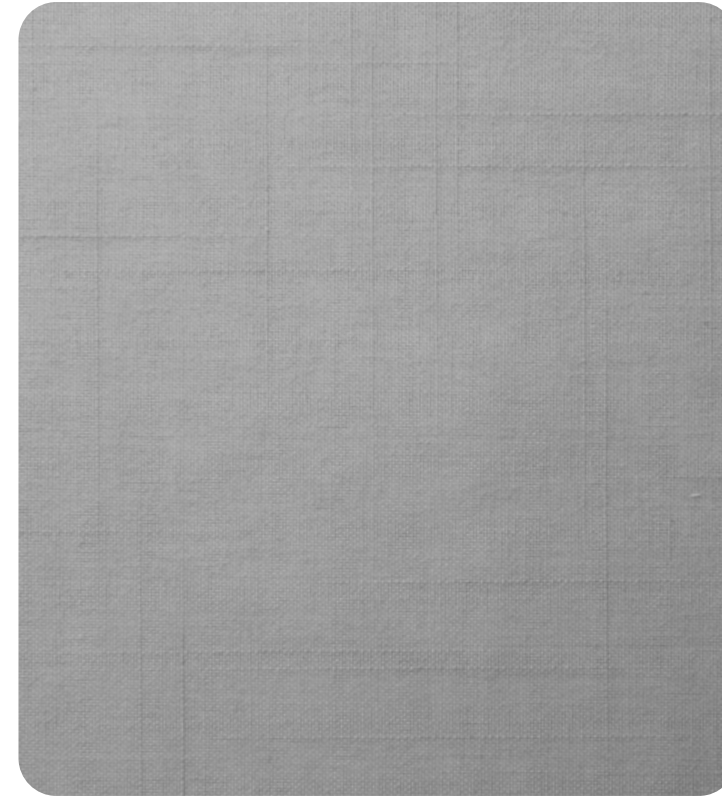**DARK GREY** 0-002-86-17106**EBONY** 0-002-86-12106

DECO-STYLES ROME



TECHNICAL PROPERTIES

Composition	23% PES 77% Cotton
Weight	151 g/m² (± 5%) 4.45 oz/yd² (± 5%)
Thickness	0.28 mm (± 5%) 0.011 in (± 5%)
Roll Width	2.7 m 106 in
Light Fastness	6-7/8
Dimensional Stability	<0.5%

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)
Brown	20	10	70
Cotton	50	37	13
Dark Grey	23	16	61
Desert	45	28	27
Ebony	15	03	82
Ivory	47	39	14
Tan	36	27	37

MANUFACTURING



Can be
Railroaded



Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades



Sliding
Panels



Indoor Use
Only

Visita nuestro blog

Ideas para tu espacio

[Ir ahora ▶](#)

THE ROLLUX BOOK

COLECCIÓN DECORATIVE

Vertilux México





CLAIRE

DECO-STYLES

COLECCIÓN DECORATIVE

CLAIRE




OFF WHITE 0-002-24-01106

CLAIRE

**IVORY** 0-002-24-02106**SAND** 0-002-24-03000**BEIGE** 0-002-24-05106**CAPUCCINO** 0-002-24-06106

CLAIRE

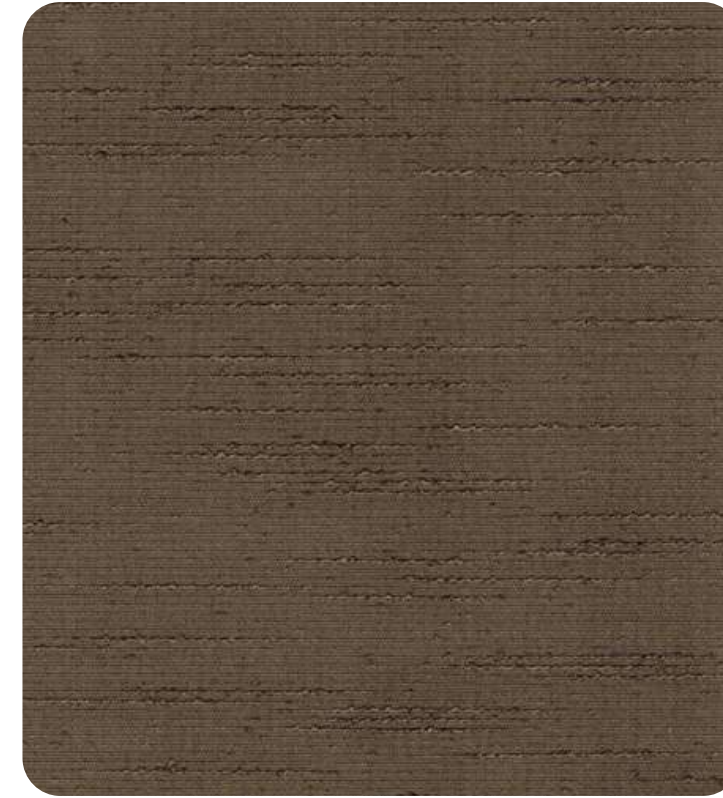**BROWN SUGAR** 0-002-24-07106**BROWN TERRA** 0-002-24-08106**LAVENDER** 0-002-24-09106**AQUAMARINE** 0-002-24-10106

CLAIRE



SEAFOAM 0-002-24-11106



DECO-STYLES
CLAIRE

TECHNICAL PROPERTIES

Composition	100% PES
Weight	242 g/m² ± 5% 7.14 oz/yd² ± 5%
Thickness	0.43 mm ± 5% 0.017 in ± 5%
Roll Width	2.7 m 106 in
Light Fastness	6-7/8 Xenotest

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)
Aquamarine	27	44	29
Beige	24	40	36
Brown Sugar	08	16	76
Cappuccino	12	24	64
Ivory	21	52	27
Lavender	17	32	51
Off White	25	53	22
Sand	19	51	30
Seafoam	23	39	38

MANUFACTURING



Use Only on
Roll Direction

Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades

Sliding
Panels

Indoor Use
Only

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶




SHANTUNG

DECO-STYLES


COLECCIÓN DECORATIVE

SHANTUNG

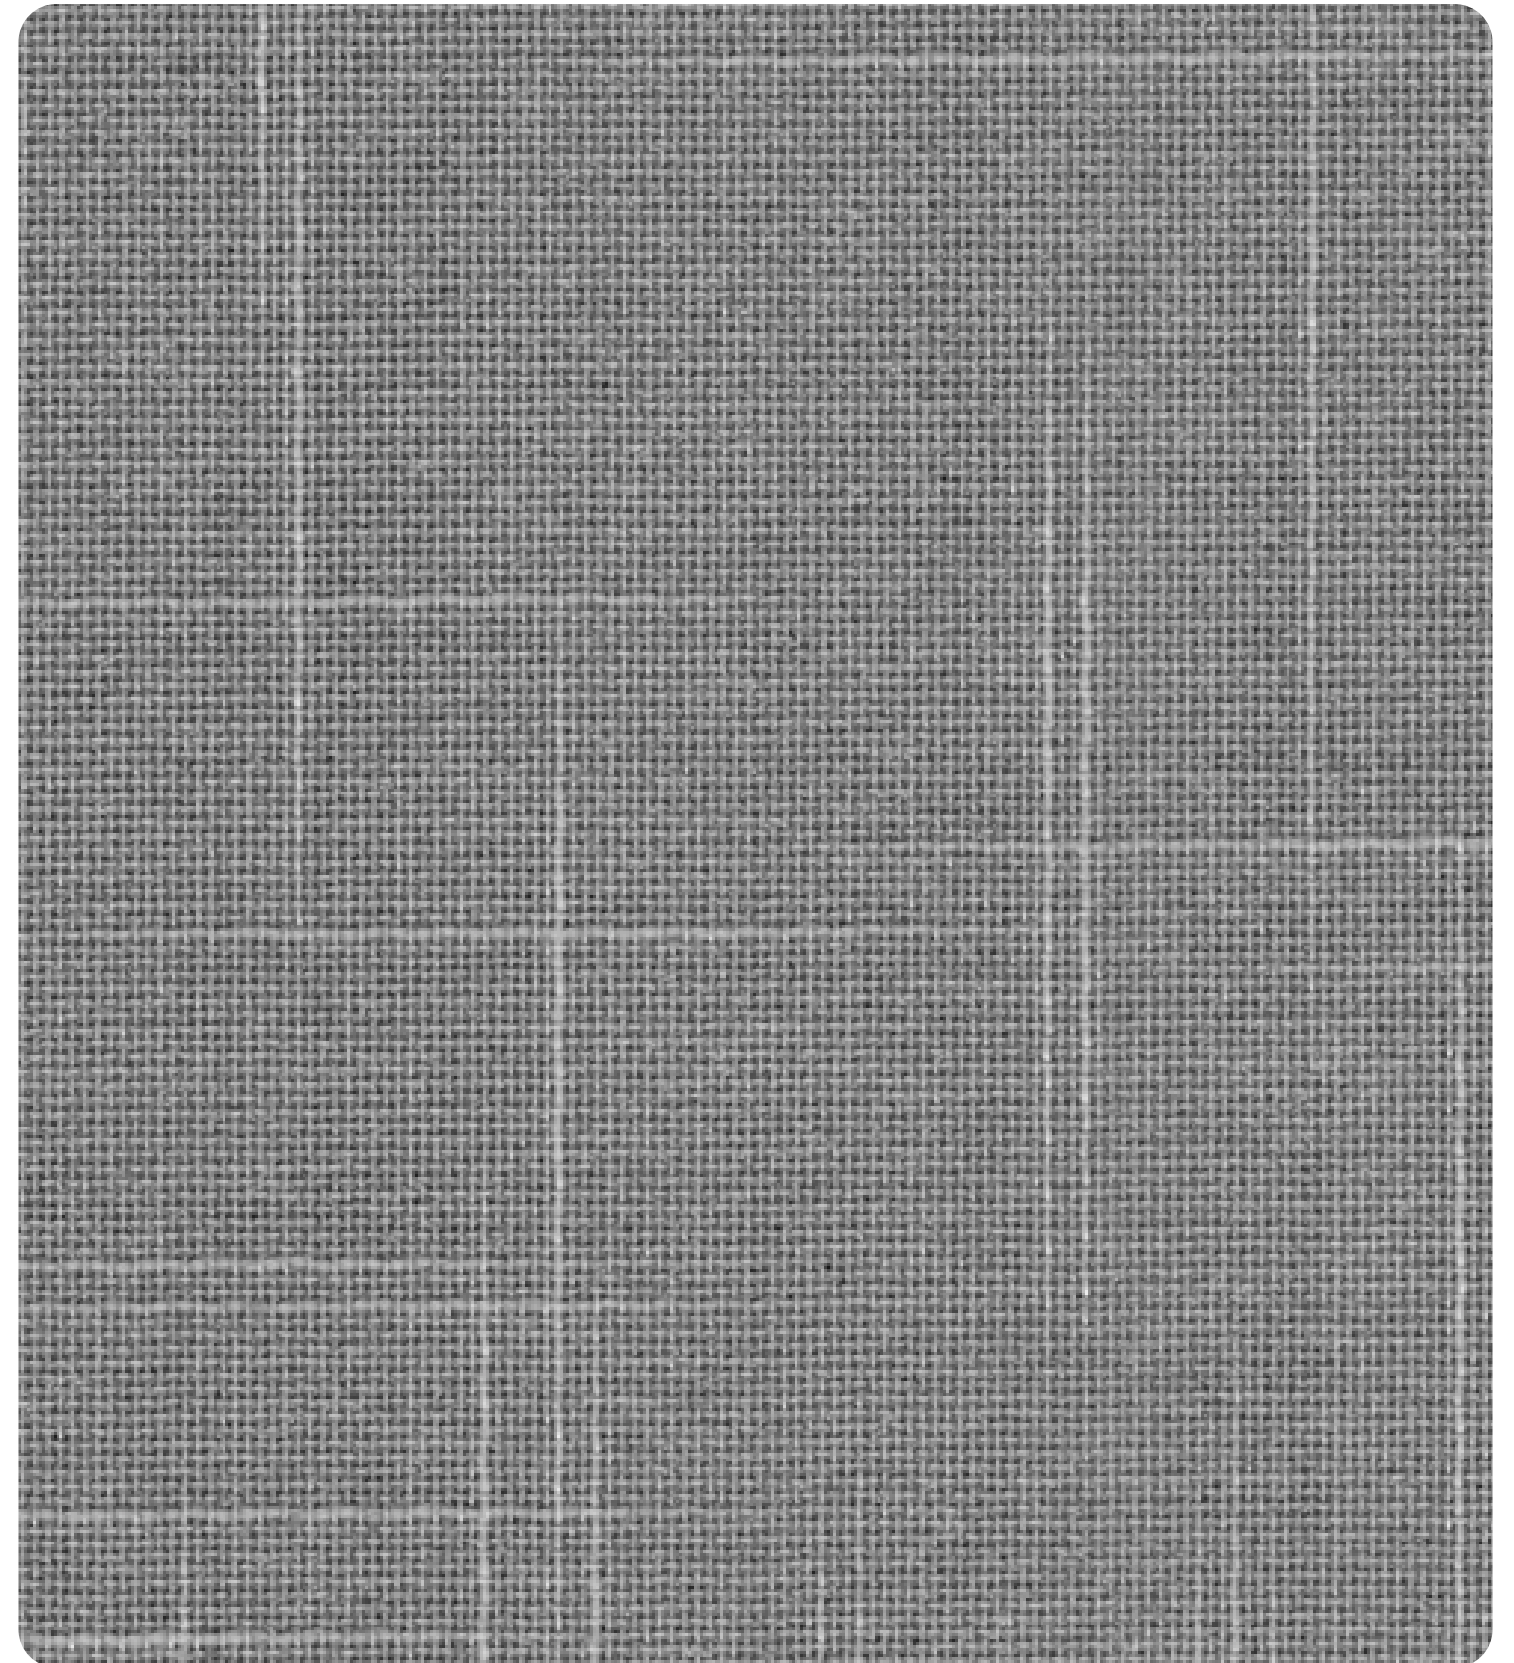


GREY 0-002-80-06098


SHANTUNG

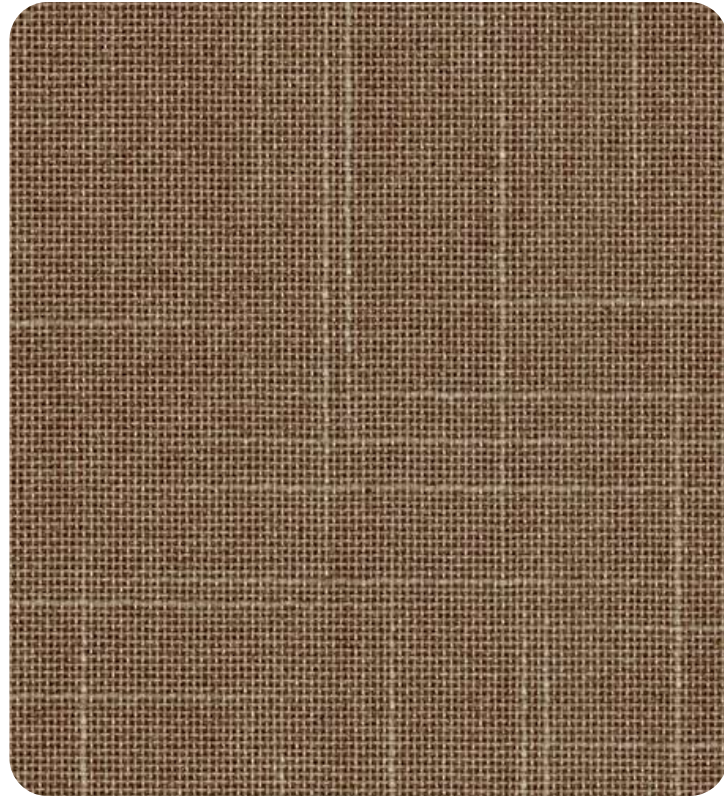


COFFEE 0-002-80-03598

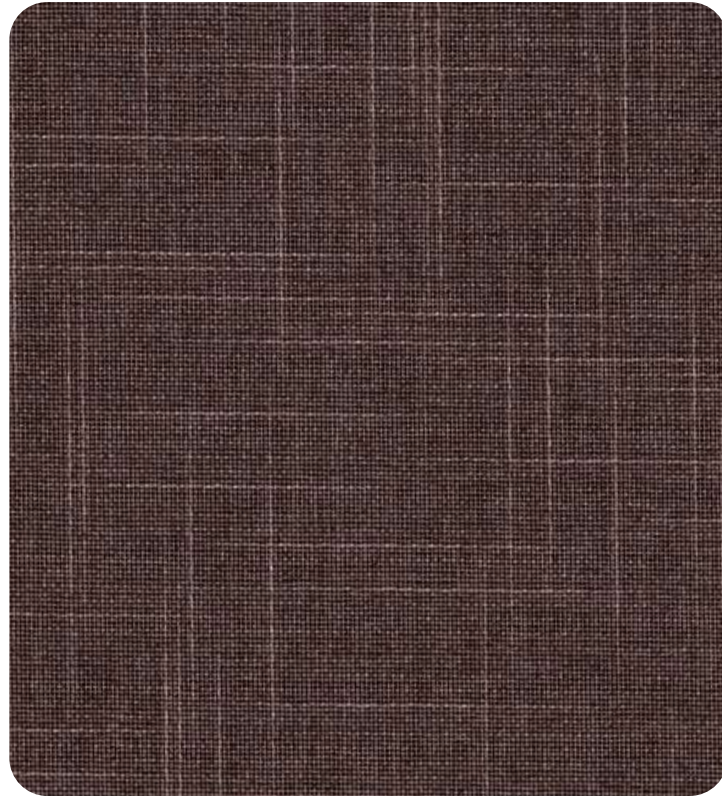

COCOA 0-002-80-17098

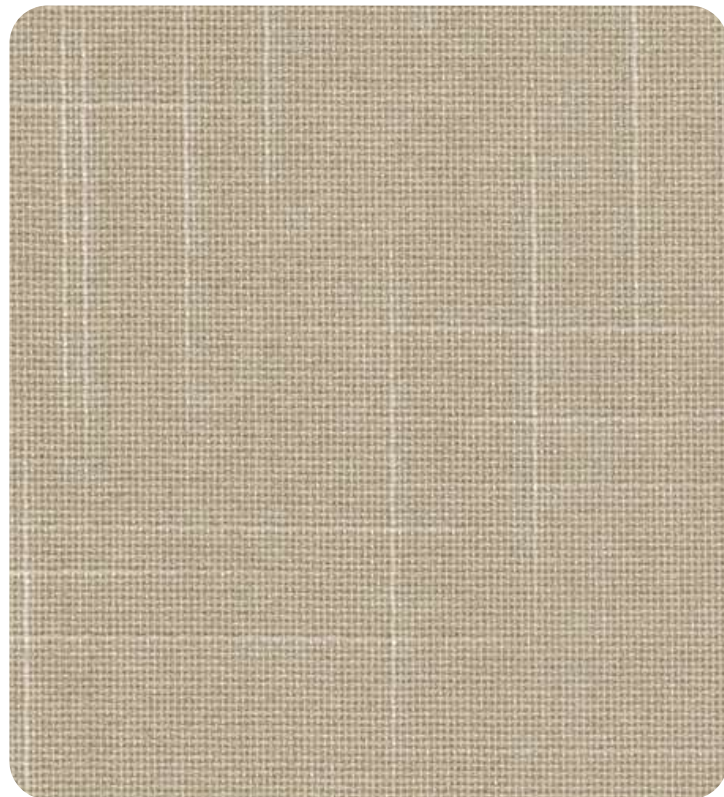


TAUPE 0-002-80-16098

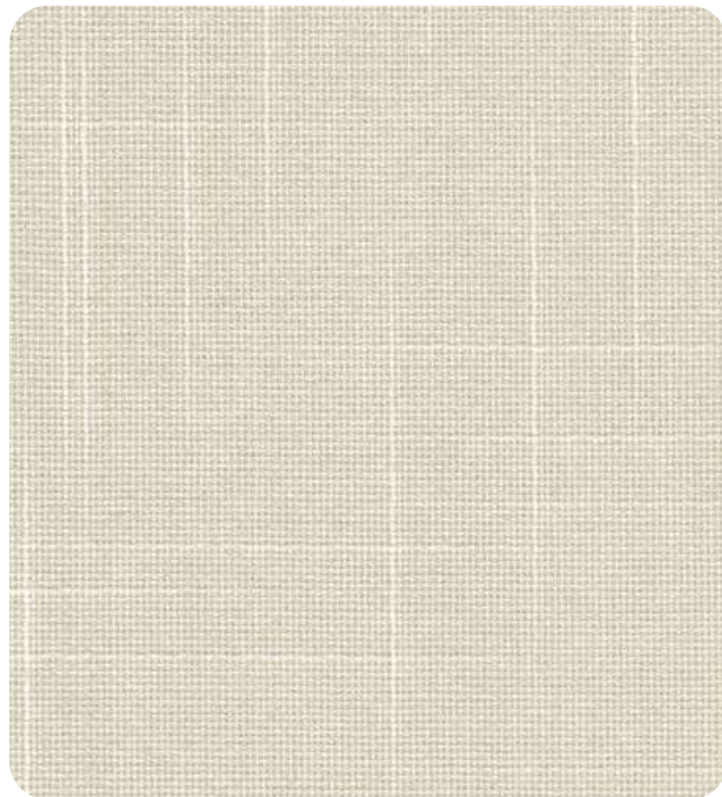


BEIGE 0-002-80-03098


SHANTUNG

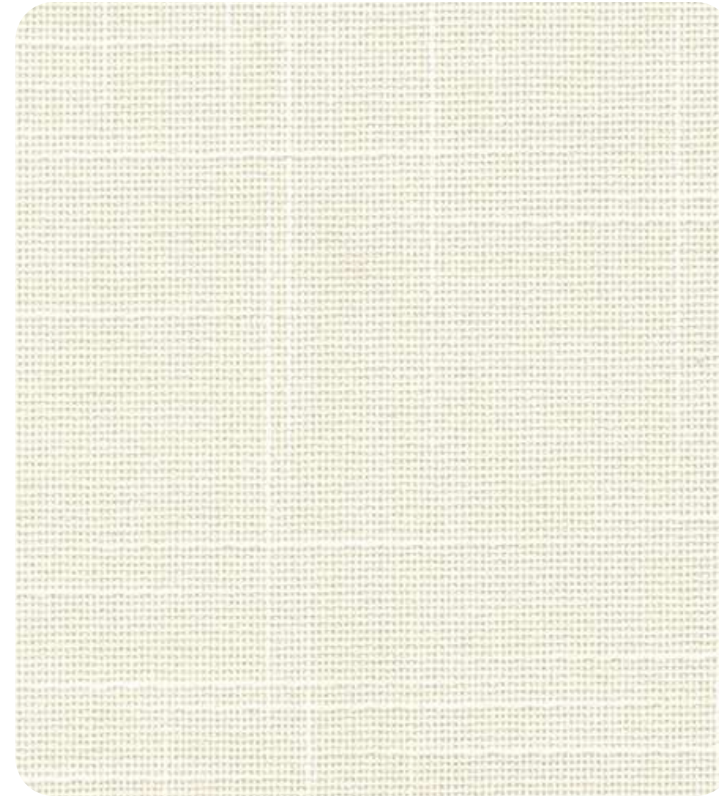


CUSTARD 0-002-80-02098

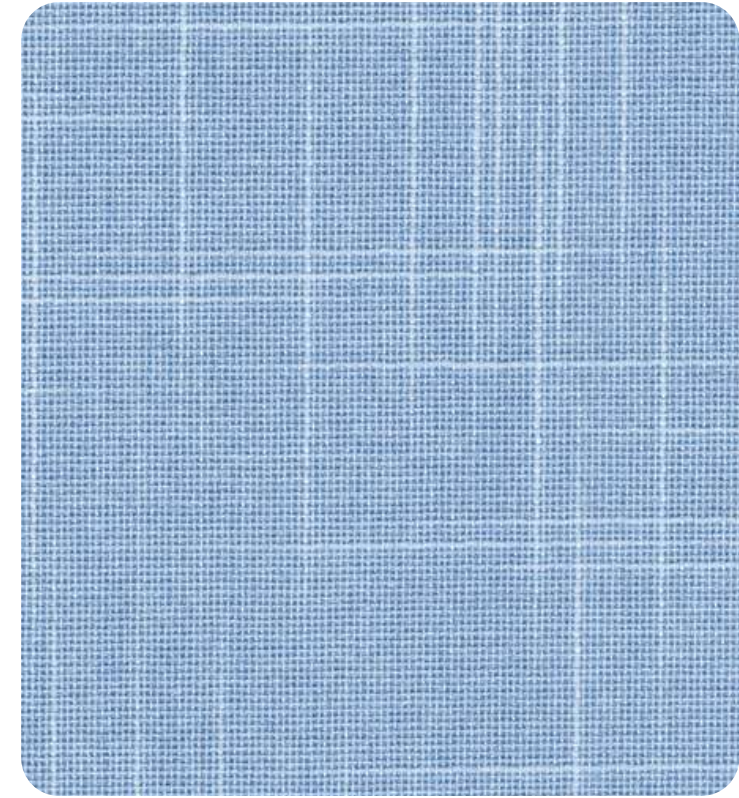

HYACINTH 0-002-80-03298

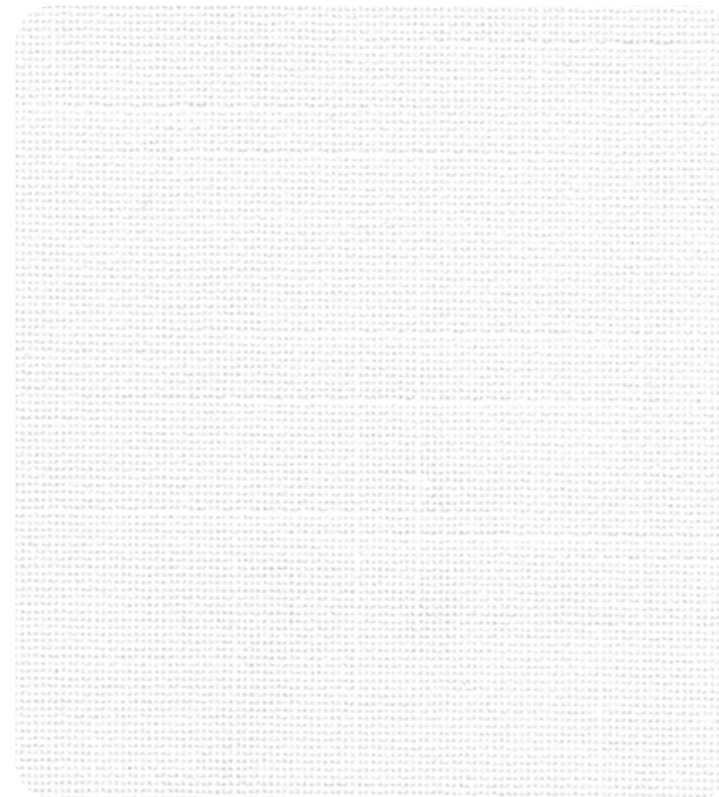

WHITE 0-002-80-01098

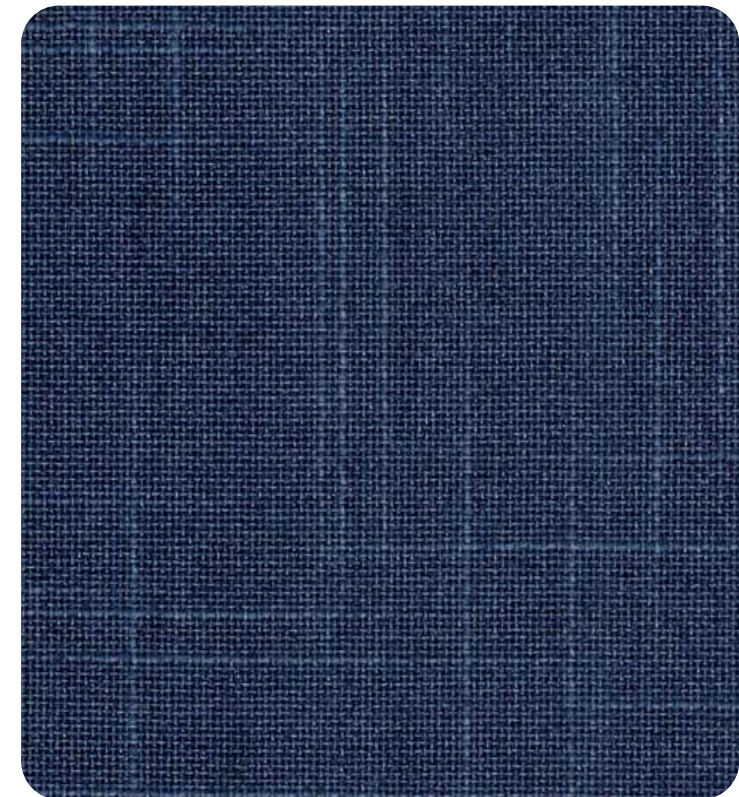

NAVY 0-002-80-01598

SHANTUNG



CORAL 0-002-80-11098



NAVY 0-002-80-01598



URBAN-CHIC SHANTUNG

TECHNICAL PROPERTIES

Composition	100% PES
Weight	240 g/m² ± 5% 7.08 oz/yd² ± 5%
Thickness	0.60 mm ± 5% 0.024 in ± 5%
Roll Width	2.5 m 98 in
Light Fastness	6-7/8 Xenotest Grade

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

SUNLIGHT CONTROL PROPERTIES


COLOR	Ts(%)	Rs(%)	As(%)
Beige	27	38	35
Butterscotch	18	36	46
Cocoa	10	17	73
Coffee	12	22	66
Coral	14	32	54
Custard	34	46	20
Fuchsia	32	14	54
Glacier Bay	26	40	34
Grey	20	28	52
Hyacinth	27	37	36
Navy	03	11	86
Salsa	01	17	82
Taupe	21	40	39
White	39	55	06
White Sandstone	27	42	31

MANUFACTURING



Use Only on Roll Direction
Ultrasonic Cut NOT Required

APPLICATIONS



Roller Shades
Sliding Panels
Indoor Use Only

Visita nuestro blog
Ideas para tu espacio
Ir ahora ▶



MISTRAL

URBAN CHIC


COLECCIÓN DECORATIVE

MISTRAL




WHITE 0-002-52-01106

MISTRAL

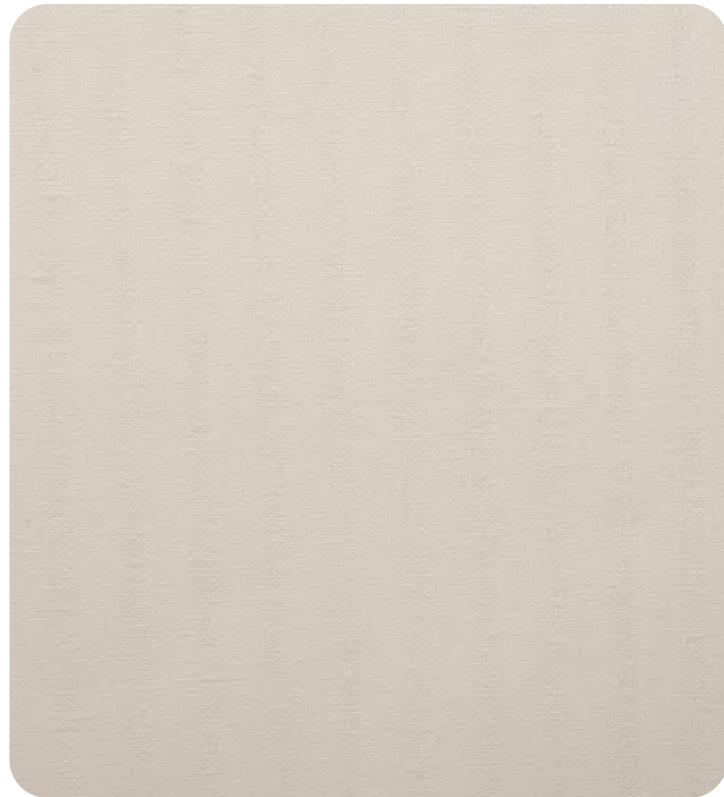**BEIGE** 0-002-52-02106**SAND** 0-002-52-03106**TAN** 0-002-52-04106**CHOCOLATE** 0-002-52-05106

MISTRAL

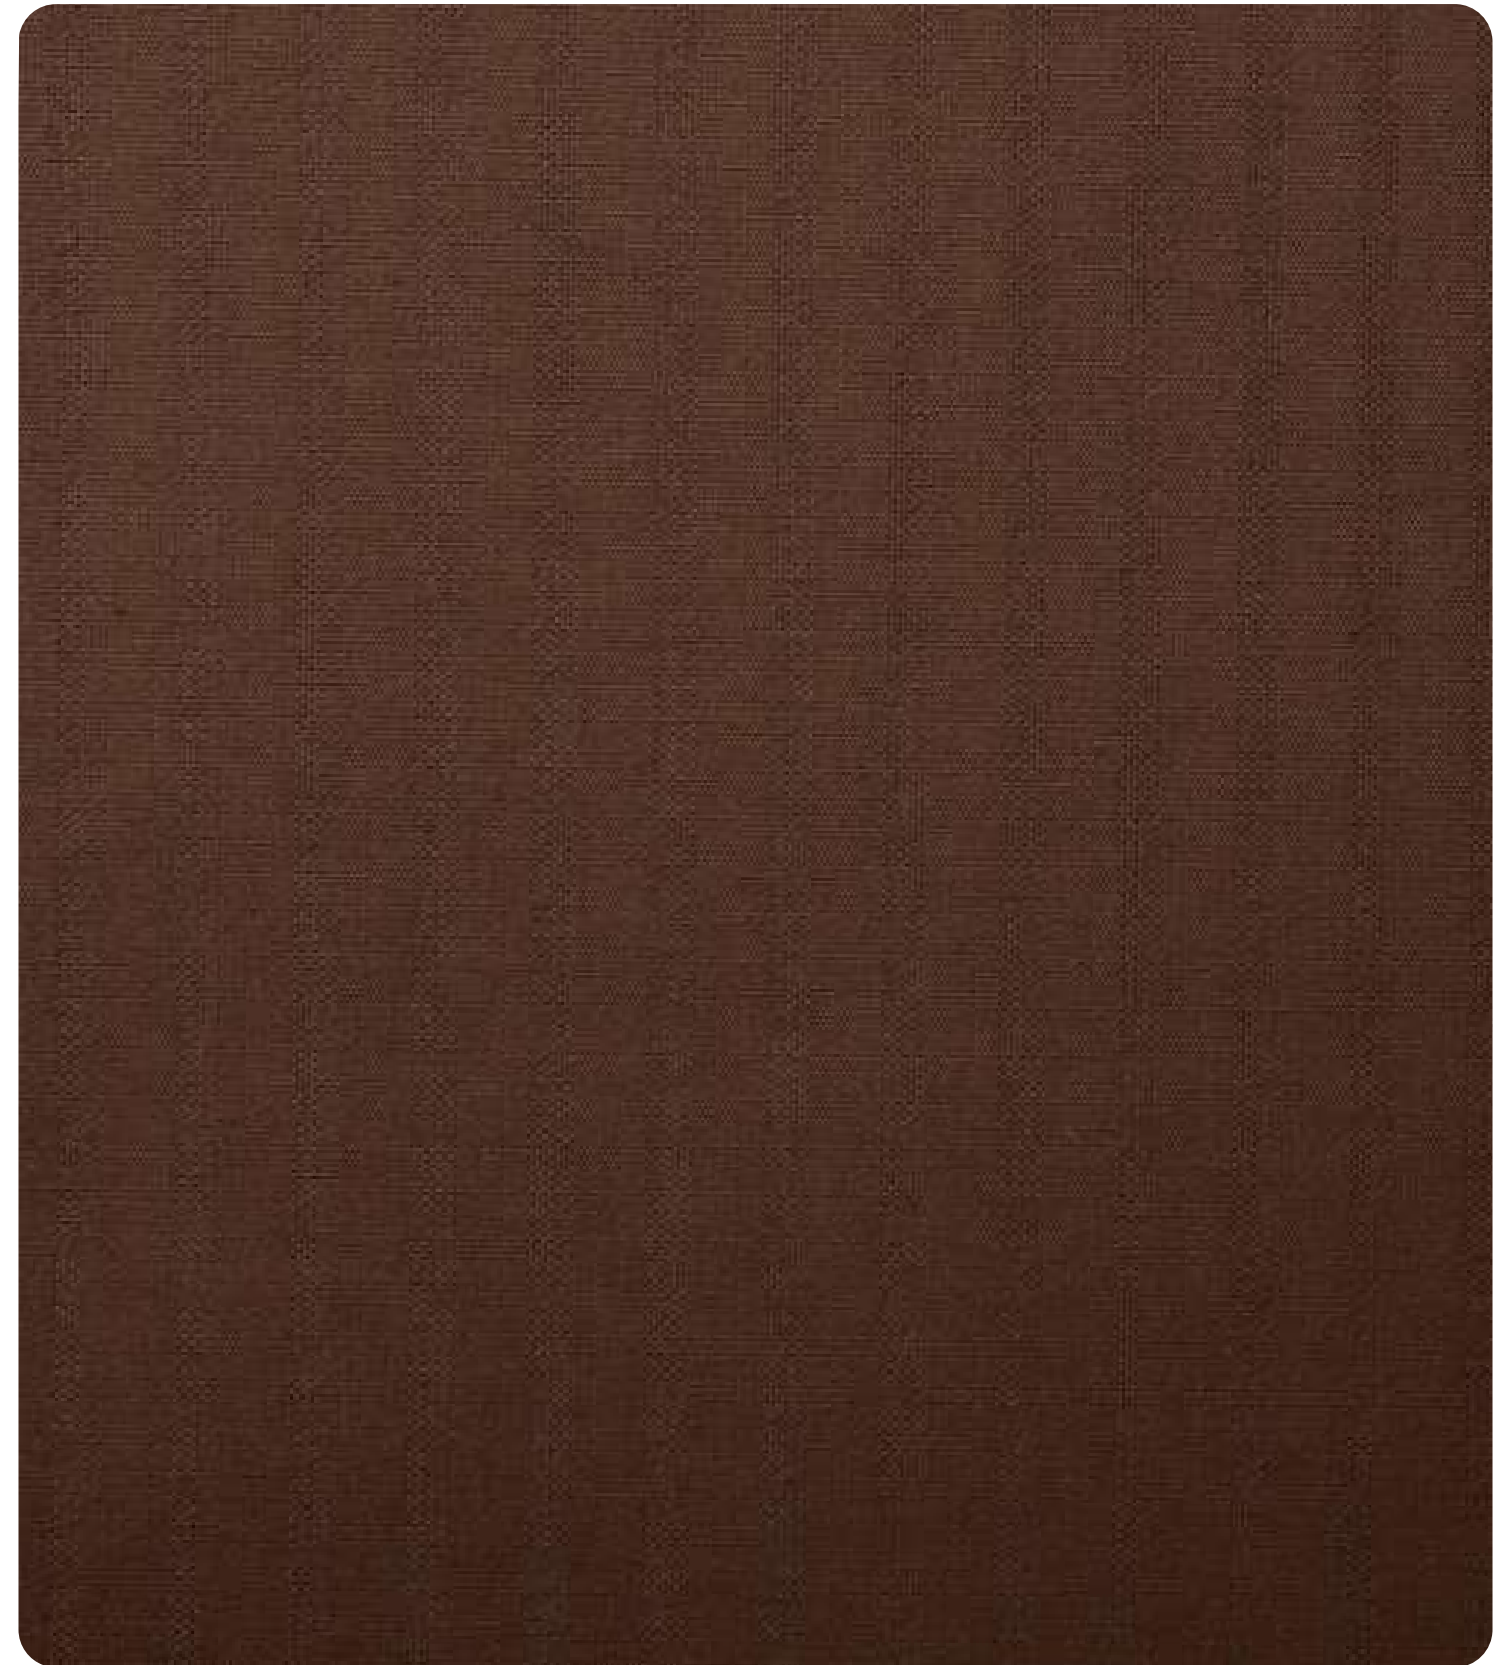**DARK BROWN** 0-002-52-06106

Blackout

Decorative

Vision

Sheerlux

[INICIO](#)

URBAN-CHIC MISTRAL



TECHNICAL PROPERTIES

Composition	100% PES
Weight	177 g/m² ± 5% 5.22 oz/yd² ± 5%
Thickness	0.32 mm ± 5% 0.013 in ± 5%
Roll Width	2.7 m 106 in
Light Fastness	6-7/8 Xenotest Grade

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)
Beige	34	44	22
Blue	17	13	70
Chocolate	09	08	83
Dark Brown	05	17	78
Green	28	26	46
Grey	24	24	52
Sand	28	35	37
Stone	28	28	44
Tan	18	23	59
Violet	16	15	69
White	36	47	17

MANUFACTURING



Use Only on
Roll Direction



Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades



Sliding
Panels



Indoor Use
Only

Visita nuestro blog

Ideas para tu espacio

[Ir ahora ▶](#)



THE ROLLUX BOOK

COLECCIÓN DECORATIVE

Vertilux México





LINEN

DECO-STYLES

COLECCIÓN DECORATIVE

LINEN



NATURAL 0-002-21-01106

LINEN



CUSTARD 0-002-21-02106



NATURAL 0-002-21-03106



DECO-STYLES LINEN

TECHNICAL PROPERTIES

Composition	94% PES + 6% Linen
Weight	225 g/m² ± 5% 6.64 oz/yd² ± 5%
Thickness	0.37 mm ± 5% 0.015 in ± 5%
Roll Width	2.7 m 106.3 in
Light Fastness	6-7/8 Xenotest Grade

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)
Custard	18	54	28
Natural	27	54	19
Tan	10	43	47

MANUFACTURING



Use Only on
Roll Direction

Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades

Sliding
Panels

Indoor Use
Only






NATURE

DECO-STYLES


COLECCIÓN DECORATIVE

NATURE

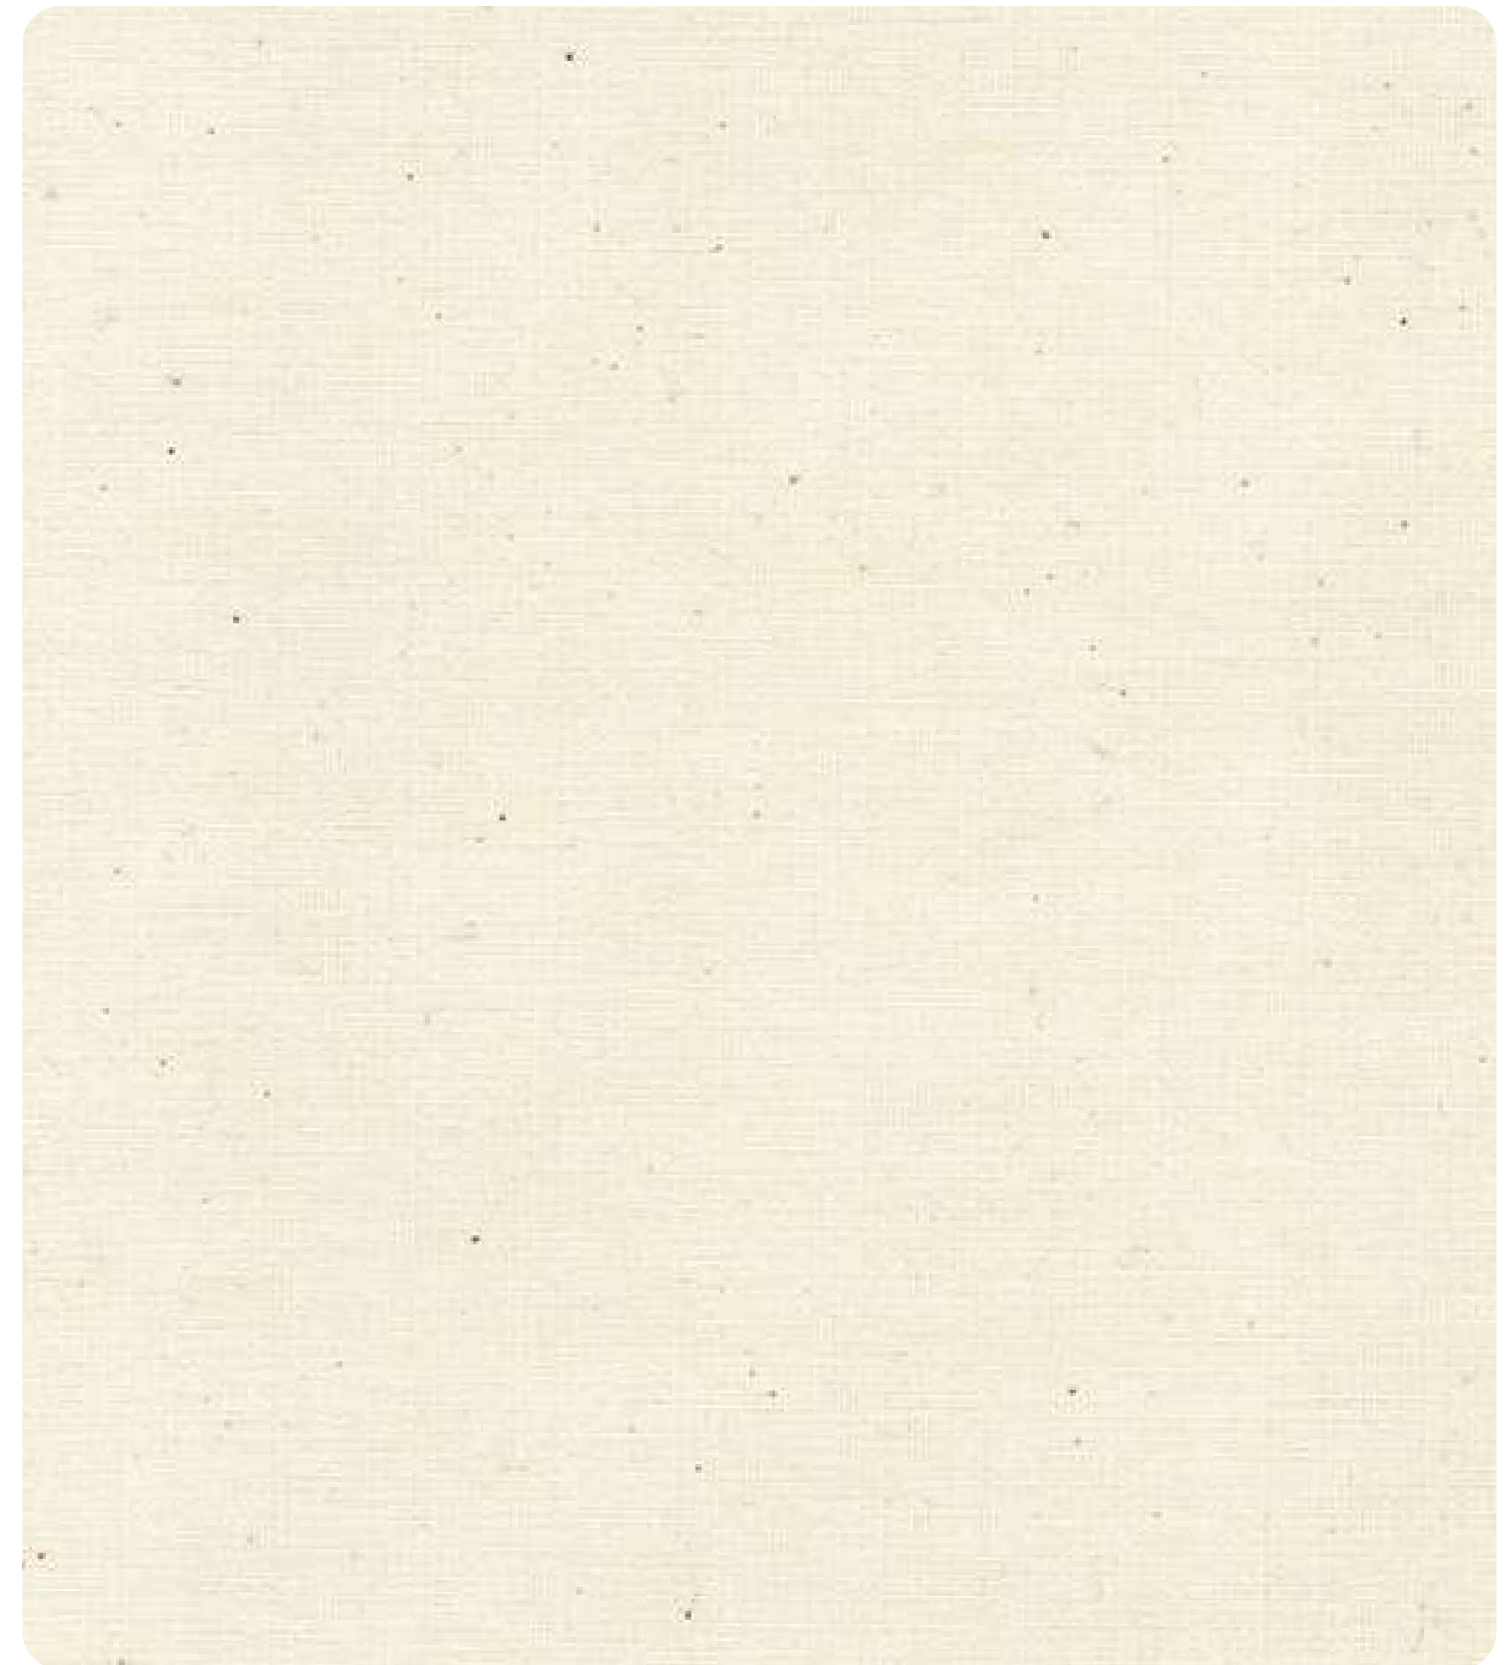

NATURAL 0-002-39-04106


NATURE

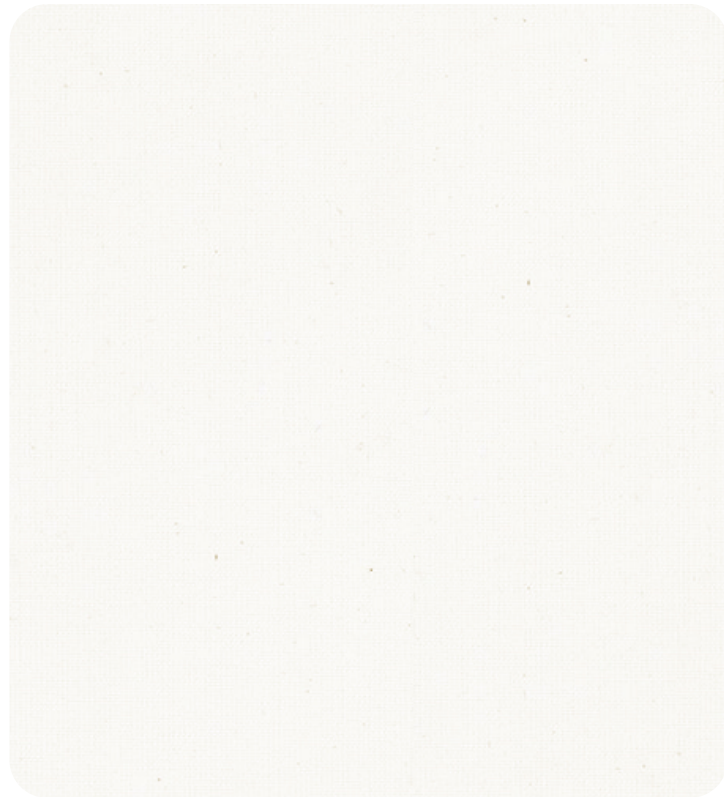


OFF WHITE 0-002-39-02106



IVORY 0-002-39-03106

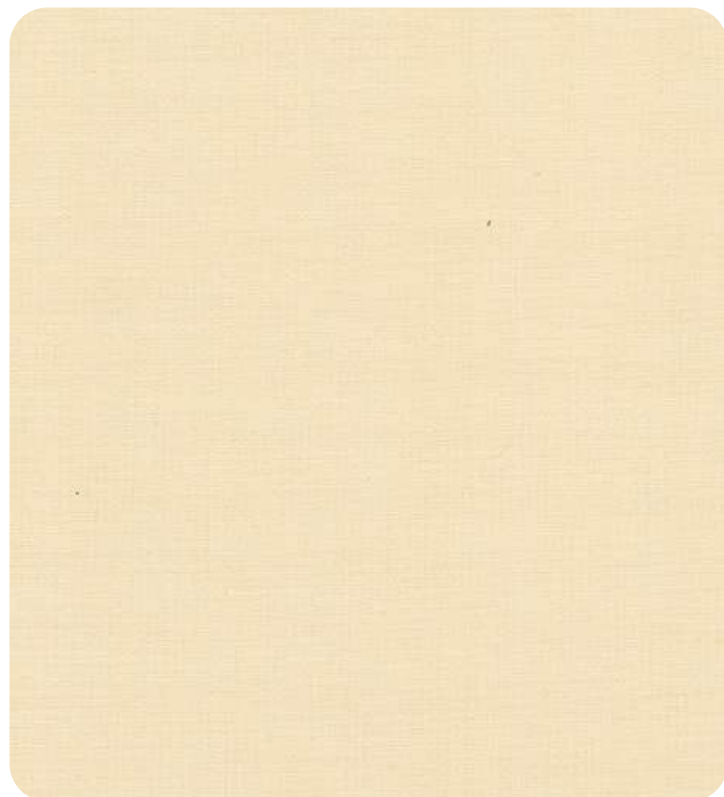


BEIGE 0-002-39-05106

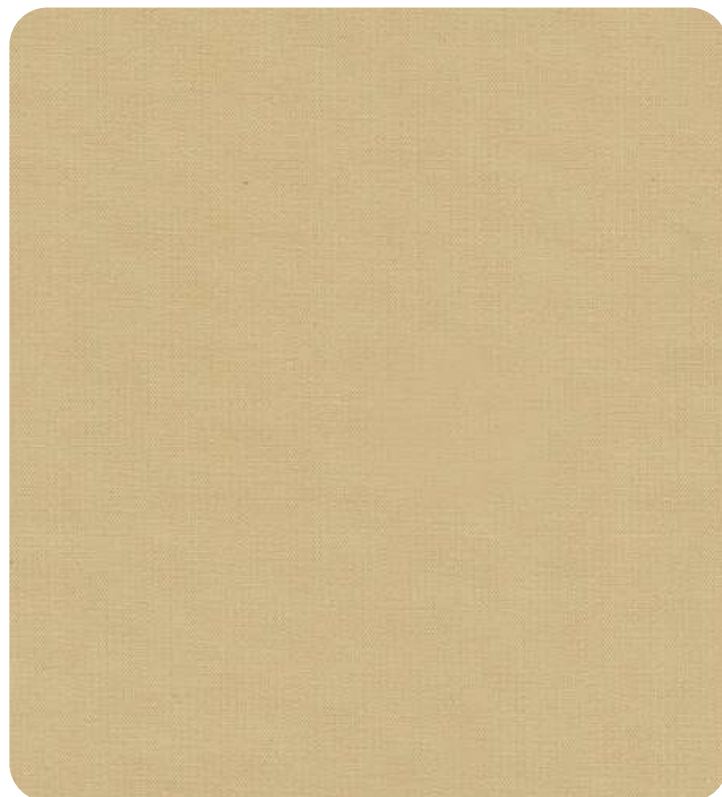

SAND 0-002-39-08106

NATURE

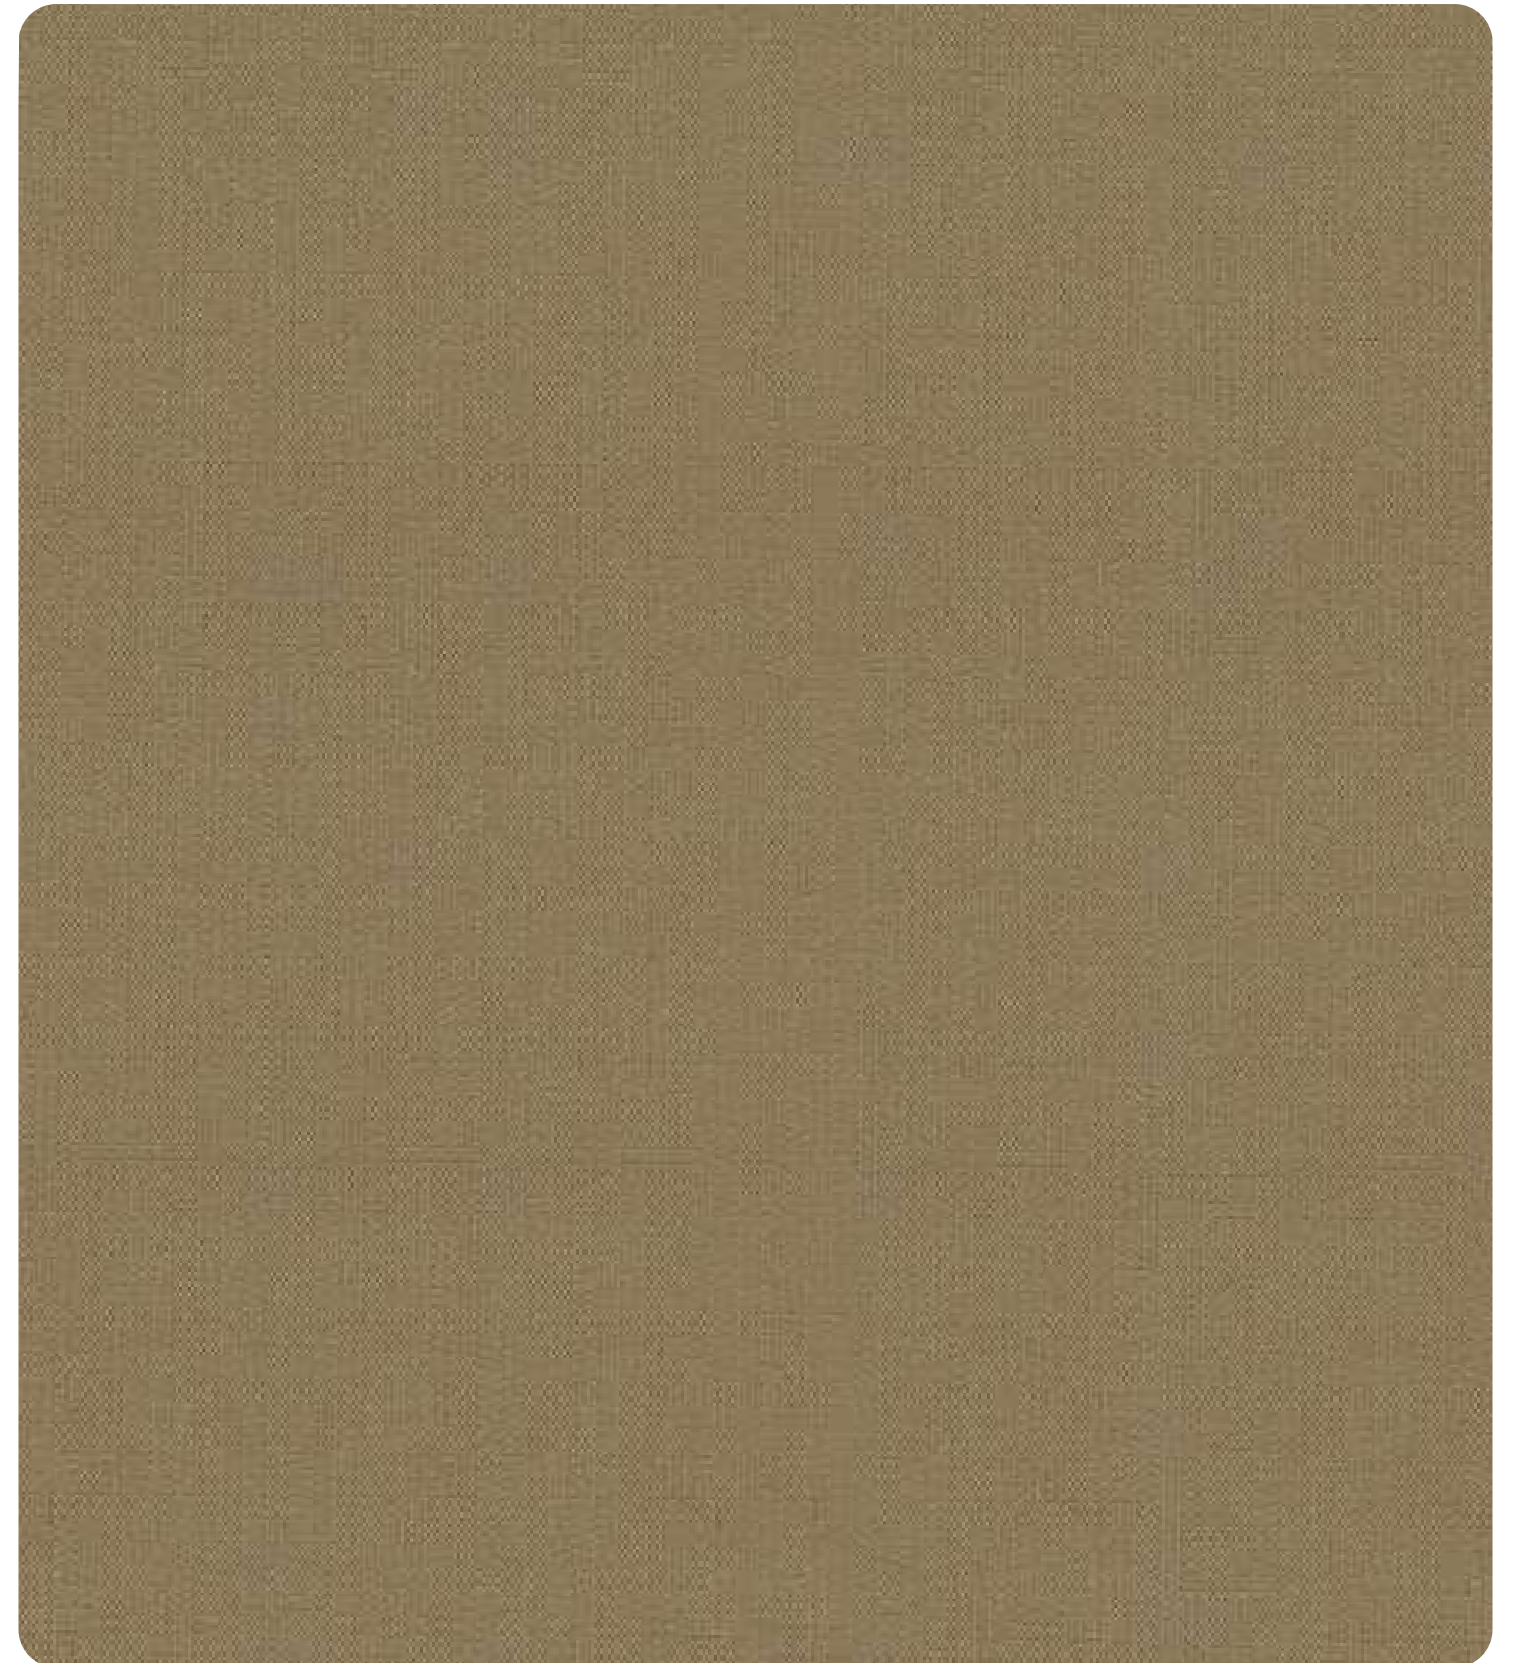

TAN 0-002-39-06106

DECO-STYLES NATURE



TECHNICAL PROPERTIES

Composition	Natural: 58% PES + 42% Cotton All other colors: 100% PES
Weight	275 g/m ² 8.11 oz/yd ²
Thickness	0.36 mm 0.014 in
Roll Width	2.7 m 106.3 in
Light Fastness	6-7 Xenotest
Dimensional Stability	<0.5%

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)
Beige	10	46	44
Ivory	16	59	25
Natural	23	62	15
Off White	22	67	11
Sand	08	42	50
Tan	03	25	72

MANUFACTURING



Use Only on
Roll Direction



Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades



Sliding
Panels



Indoor Use
Only

Visita nuestro blog

Ideas para tu espacio

Ir ahora ►



THE ROLLUX BOOK



KENYA

DECO-STYLES



COLECCIÓN DECORATIVE

KENYA





SAND 0-002-15-09106

KENYA

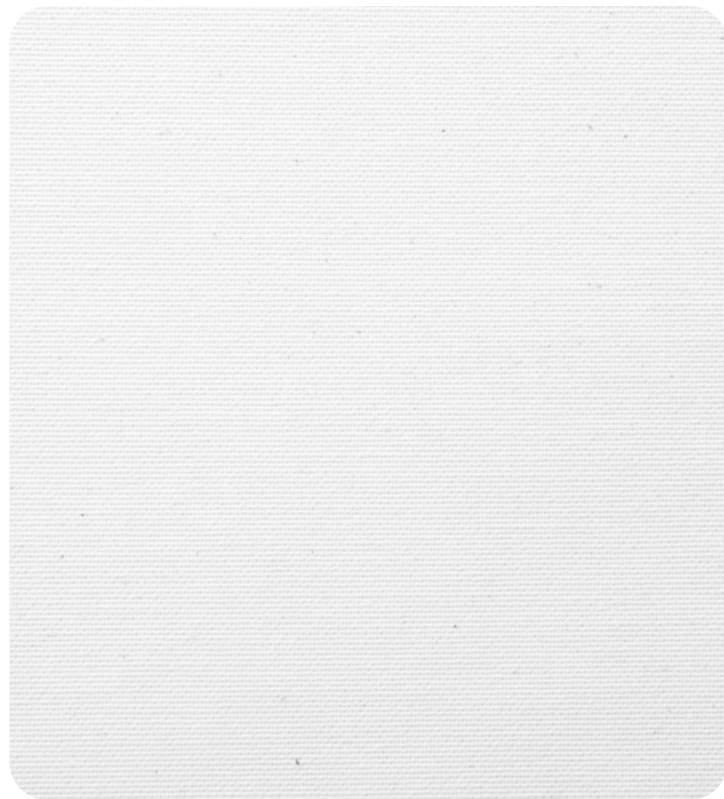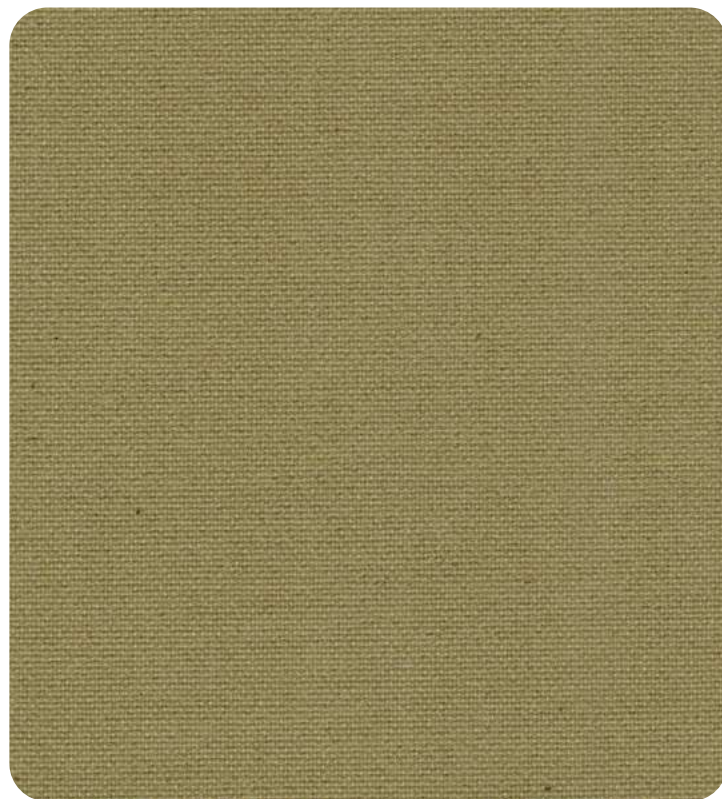**WHITE** 0-002-15-01106**IVORY** 0-002-15-06106**BEIGE** 0-002-15-08106**BURLAP** 0-002-15-10106

KENYA

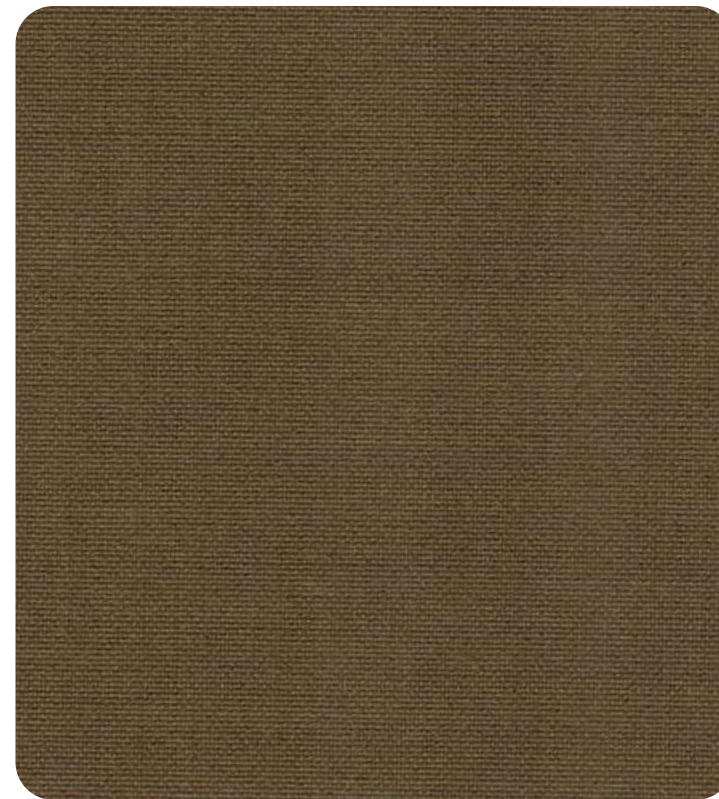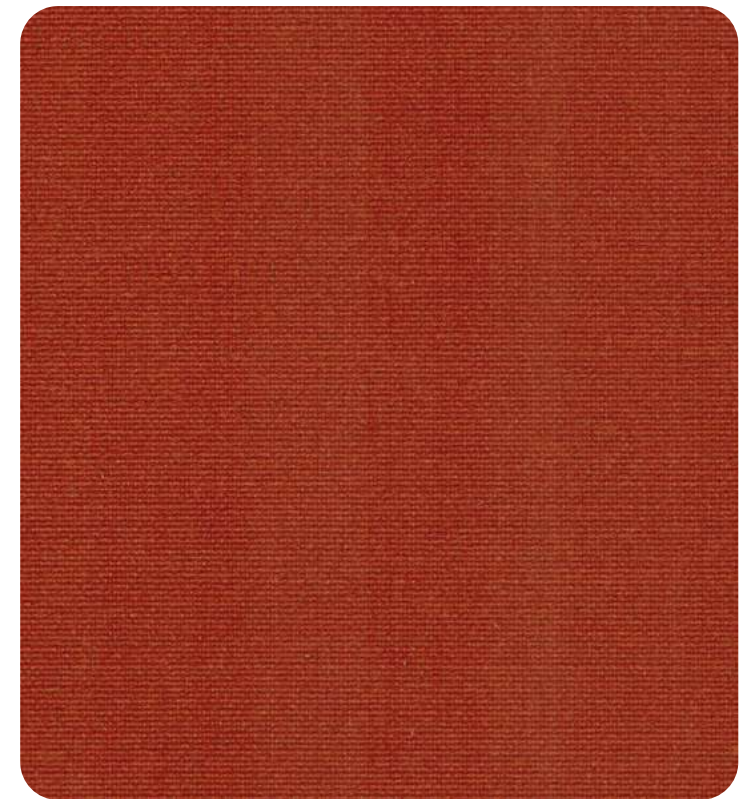**CAPPUCCINO** 0-002-15-11106**TERRACOTA** 0-002-15-04106

DECO-STYLES KENYA



TECHNICAL PROPERTIES

Composition	23% PES + 77% Cotton
Weight	275 g/m ² ± 5% 8.10 oz/yd ² ± 5%
Thickness	0.44 mm ± 5% 0.017 in ± 5%
Roll Width	2.7 m 106 in
Light Fastness	6-7/8
Dimensional Stability	<0.5%

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

SUNLIGHT CONTROL PROPERTIES

COLOR	Ts(%)	Rs(%)	As(%)
Beige	16	51	33
Burlap	10	27	63
Cappuccino	06	16	78
Ivory	23	49	28
Sand	14	42	44
Terracota	05	20	75
White	23	67	10

MANUFACTURING



Use Only on
Roll Direction



Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades



Sliding
Panels



Indoor Use
Only

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

Visita nuestro blog

Ideas para tu espacio

[Ir ahora ▶](#)

VERTILUX
IDEAS PARA TU ESPACIO

THE ROLLUX BOOK

COLECCIÓN DECORATIVE

Vertilux México






SOUTH BEACH

URBAN CHIC





COLECCIÓN DECORATIVE

SOUTH BEACH



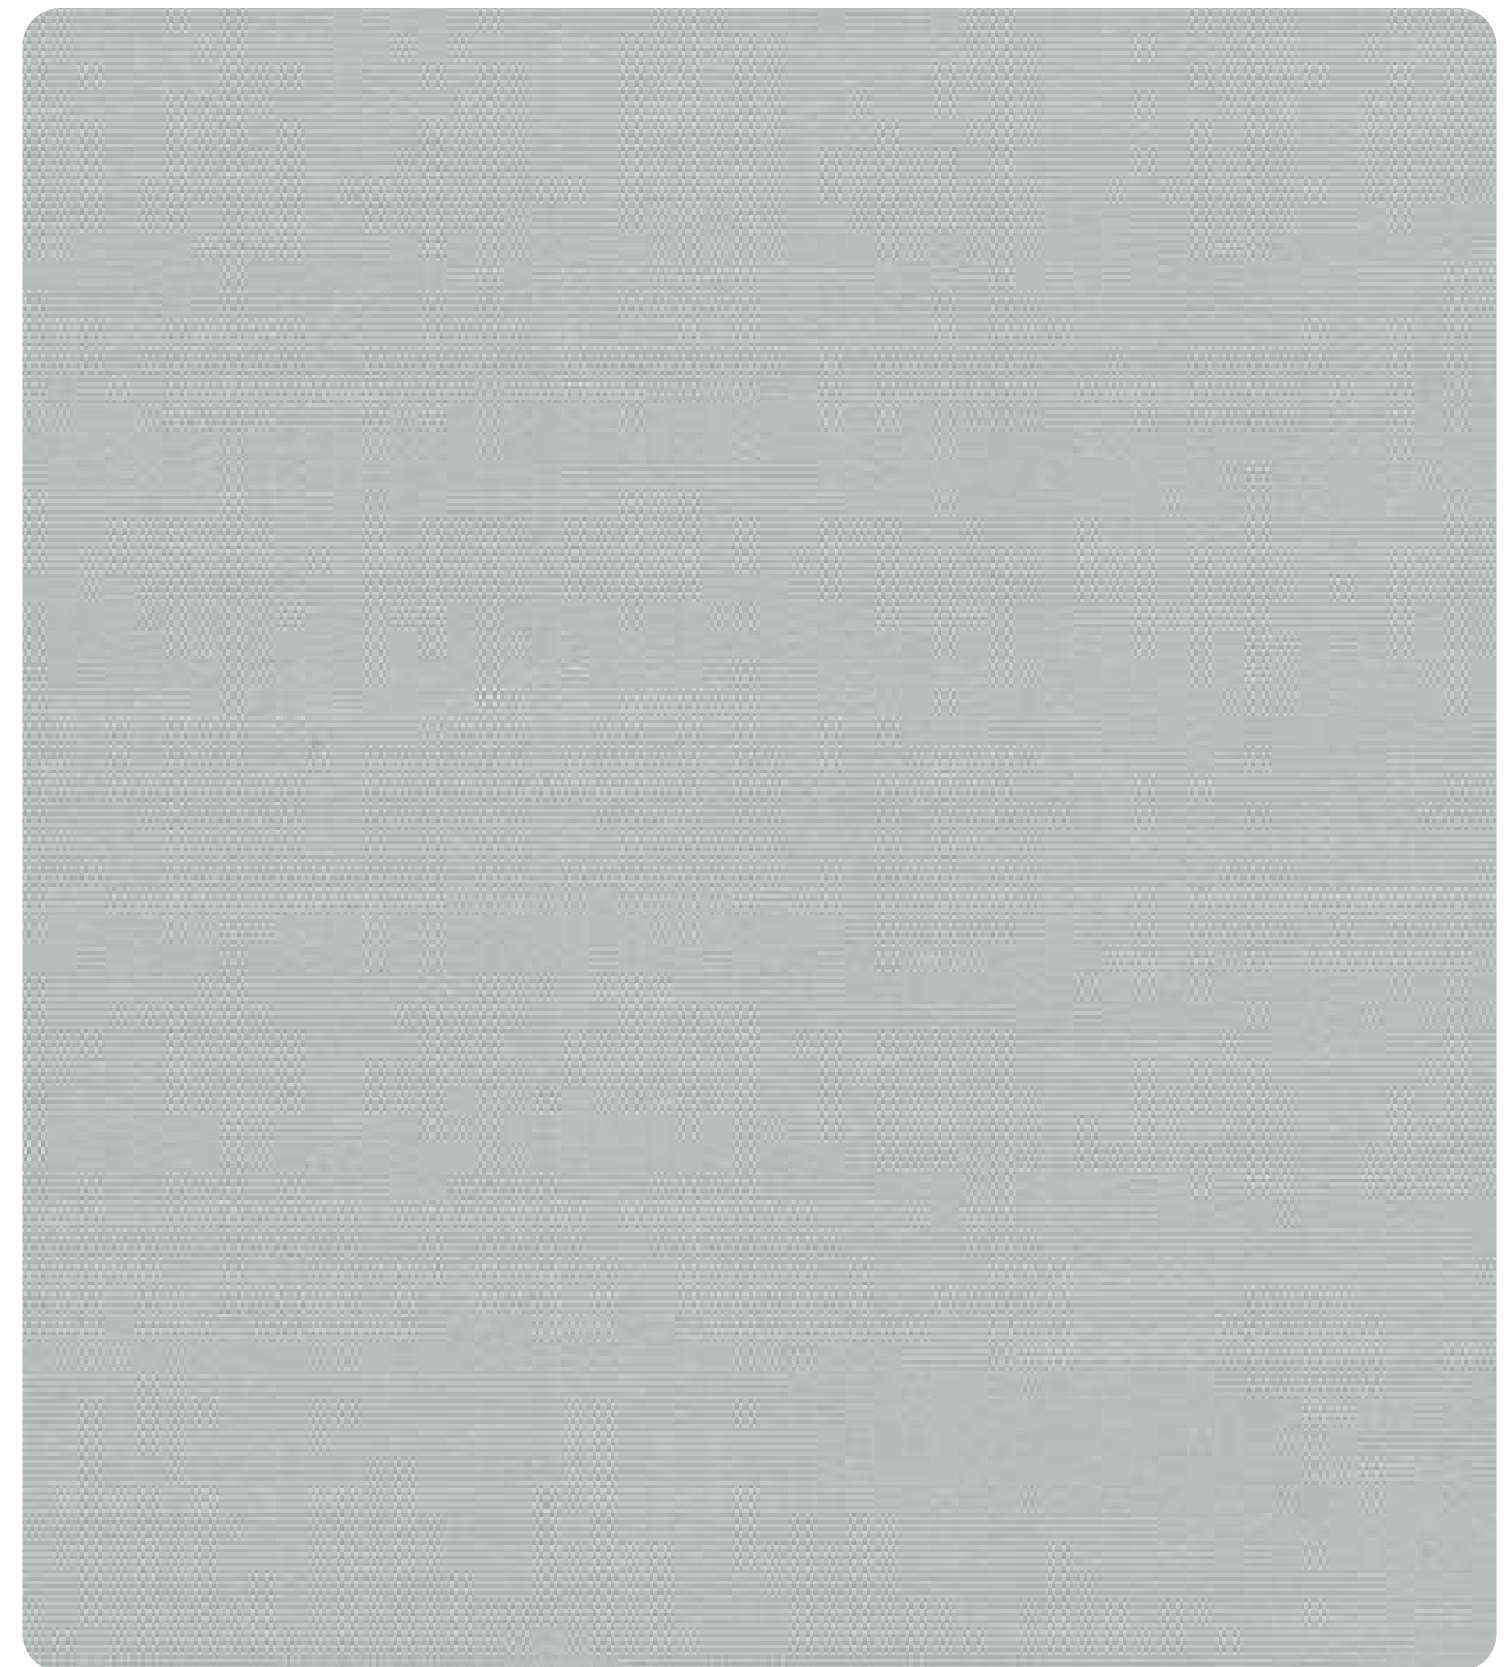


PEARL 0-002-92-01598





SOUTH BEACH

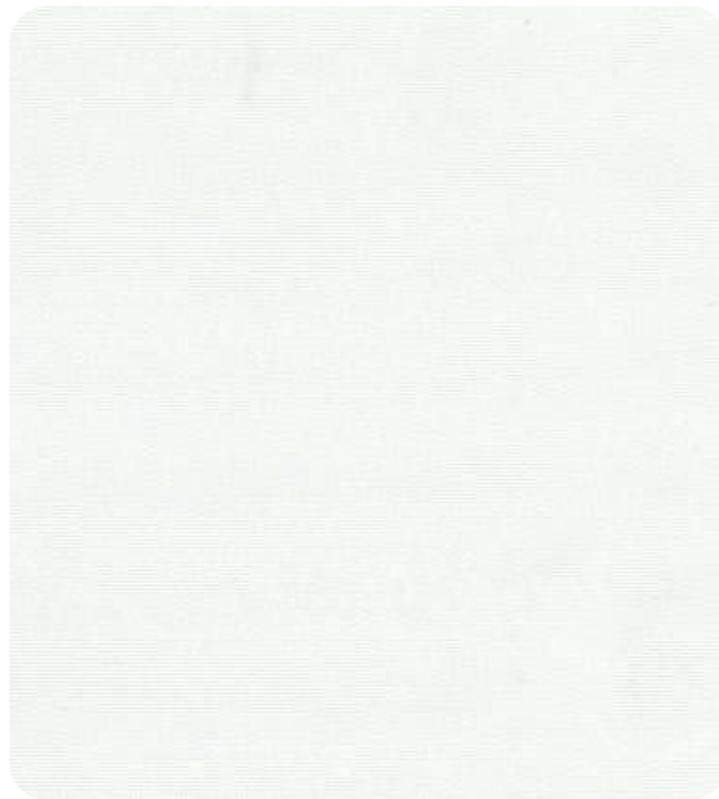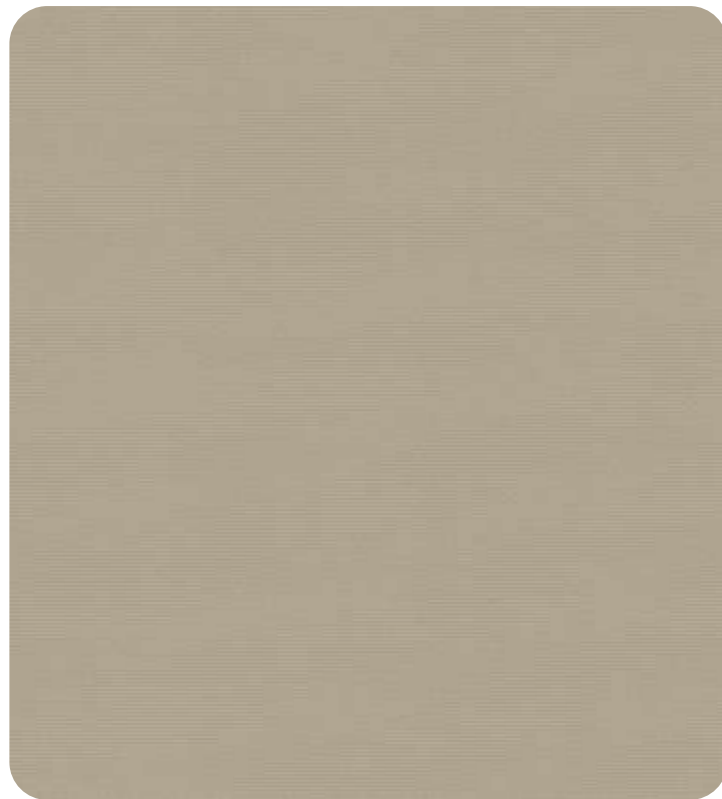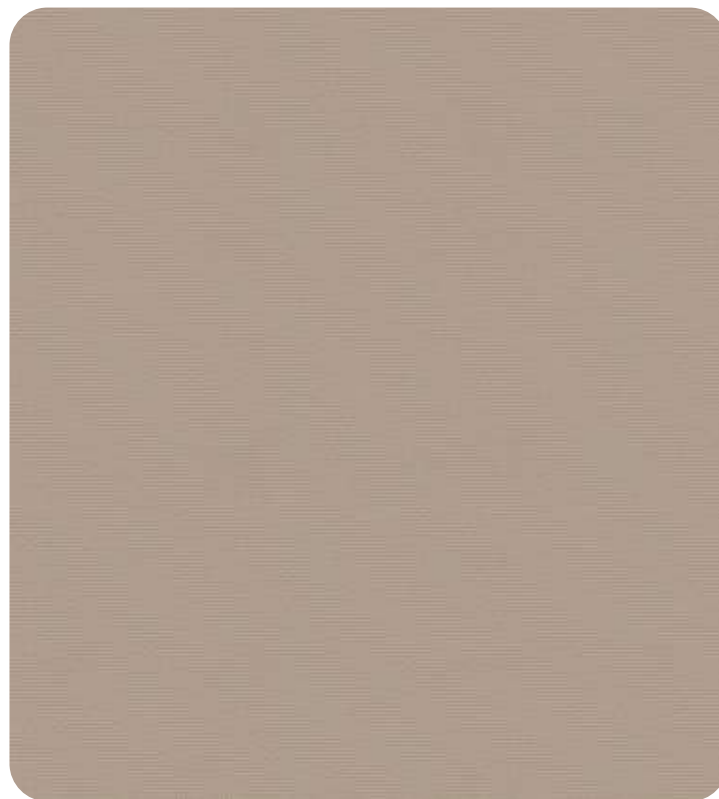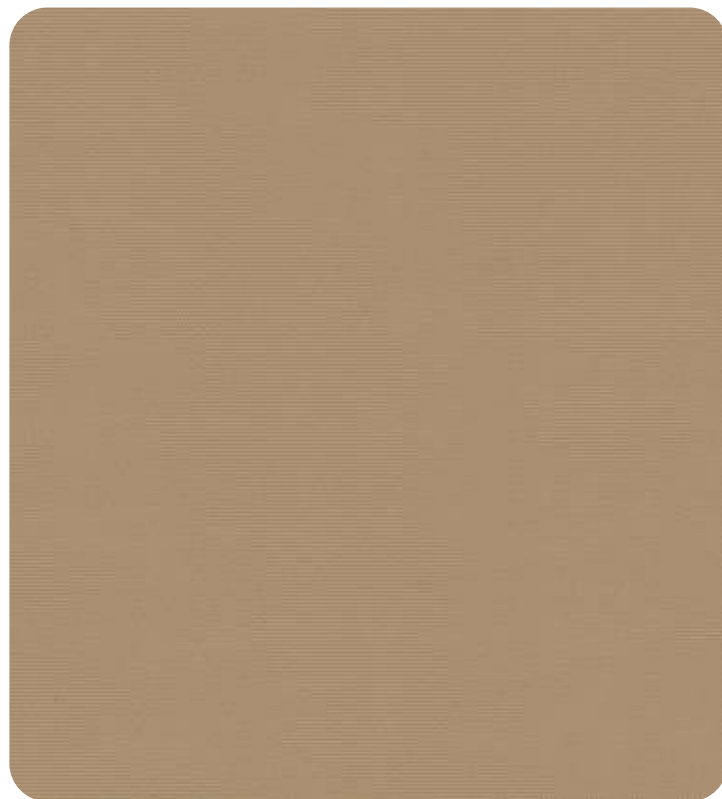**WHITE** 0-002-92-00198**BEIGE** 0-002-92-00498**SAND** 0-002-92-00598**SKIN** 0-002-92-00698





SOUTH BEACH

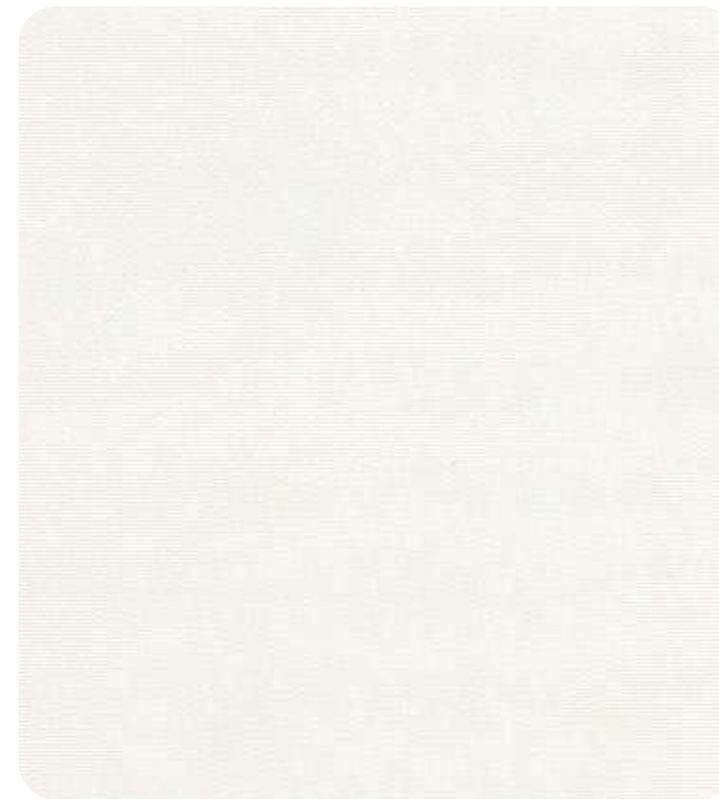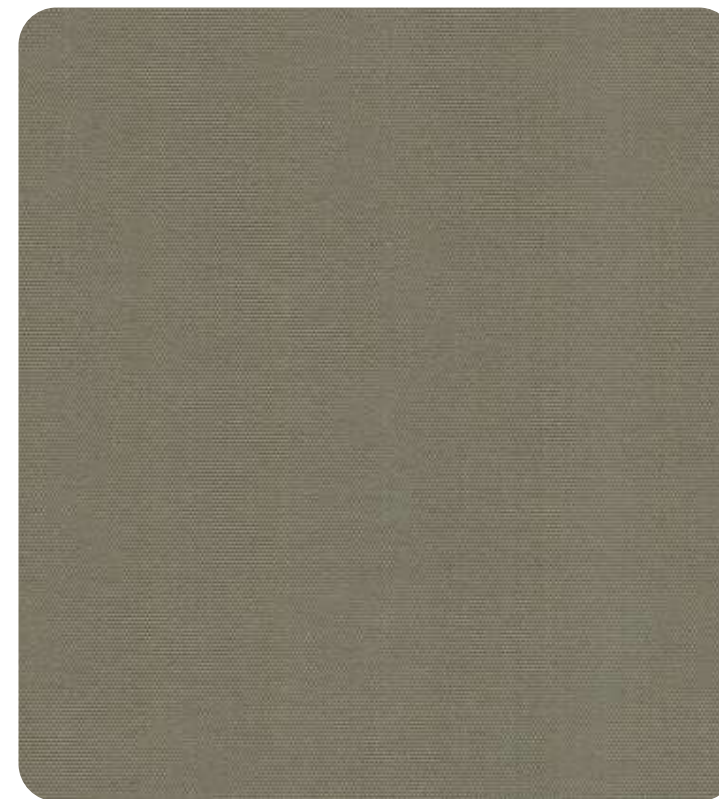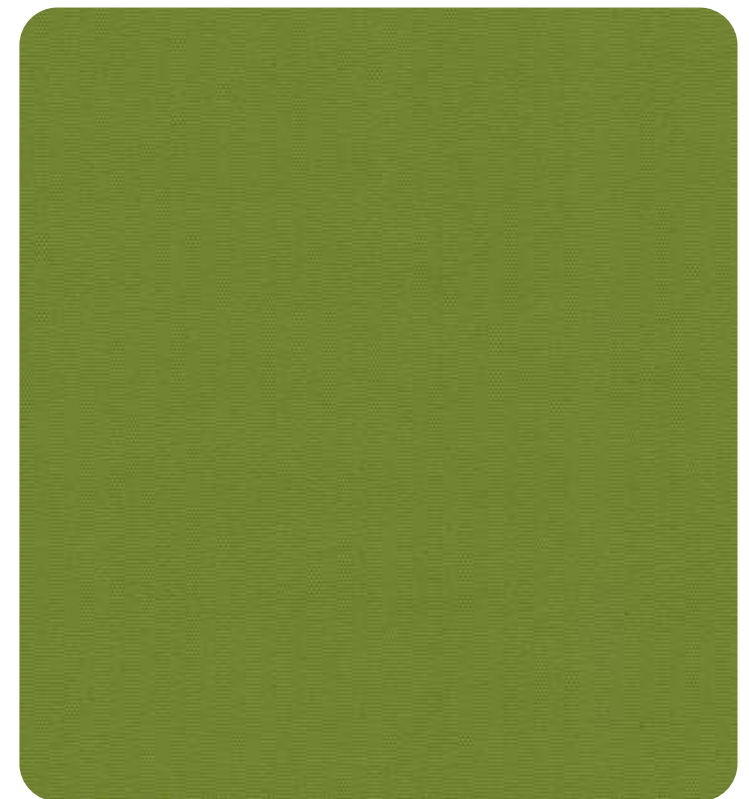**CUSTARD** 0-002-92-00298**IVORY** 0-002-92-00398**STONE** 0-002-92-01698**GRASS** 0-002-92-01298

SOUTH BEACH

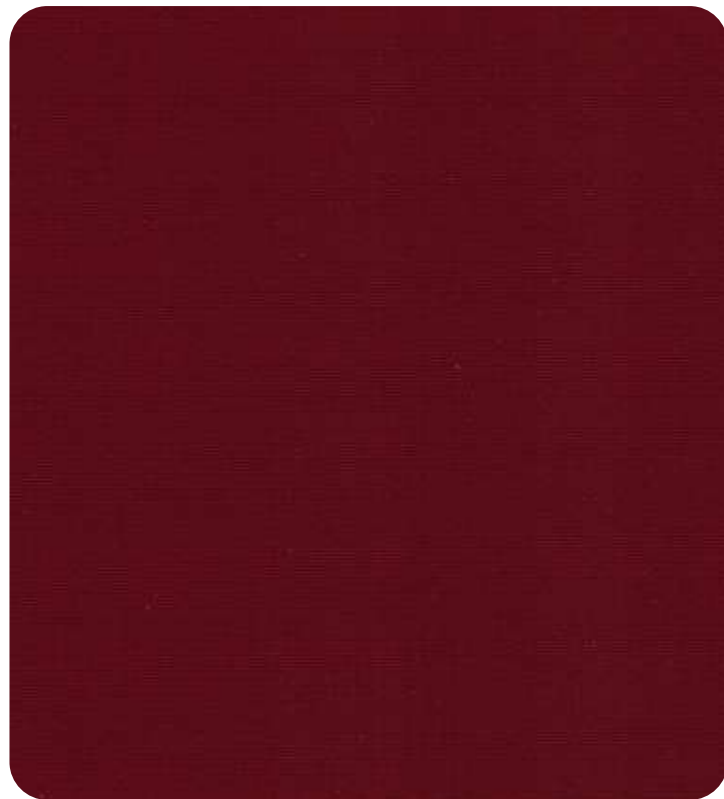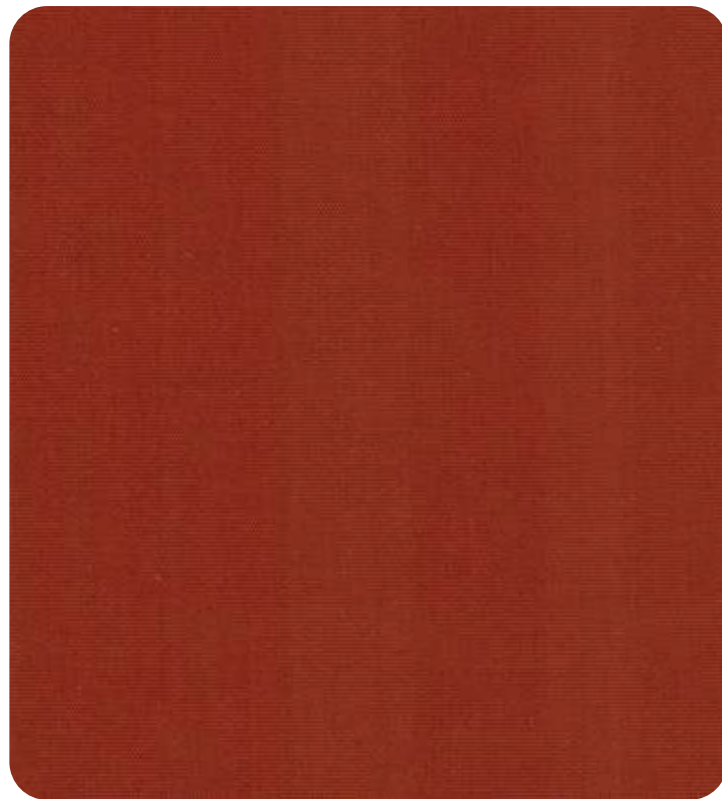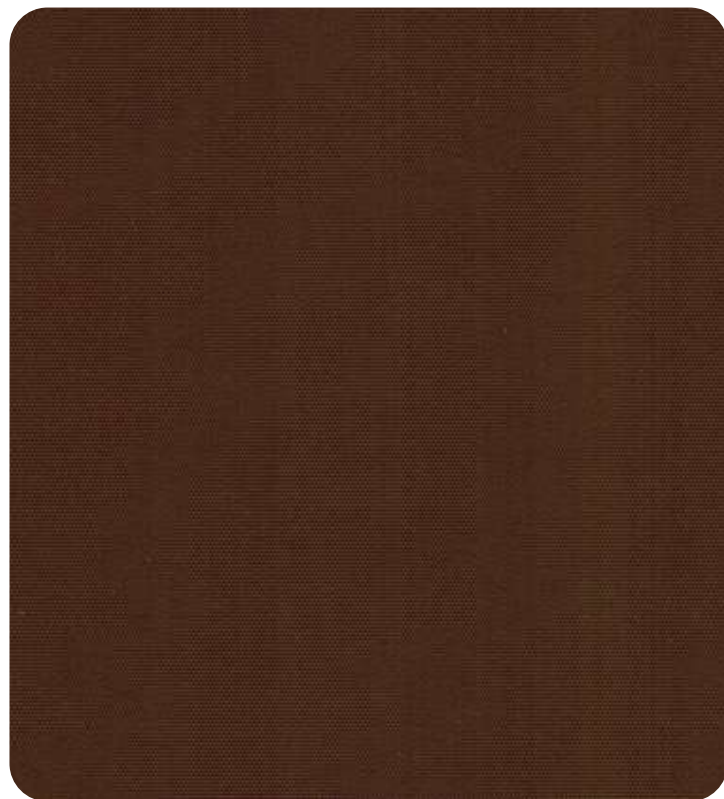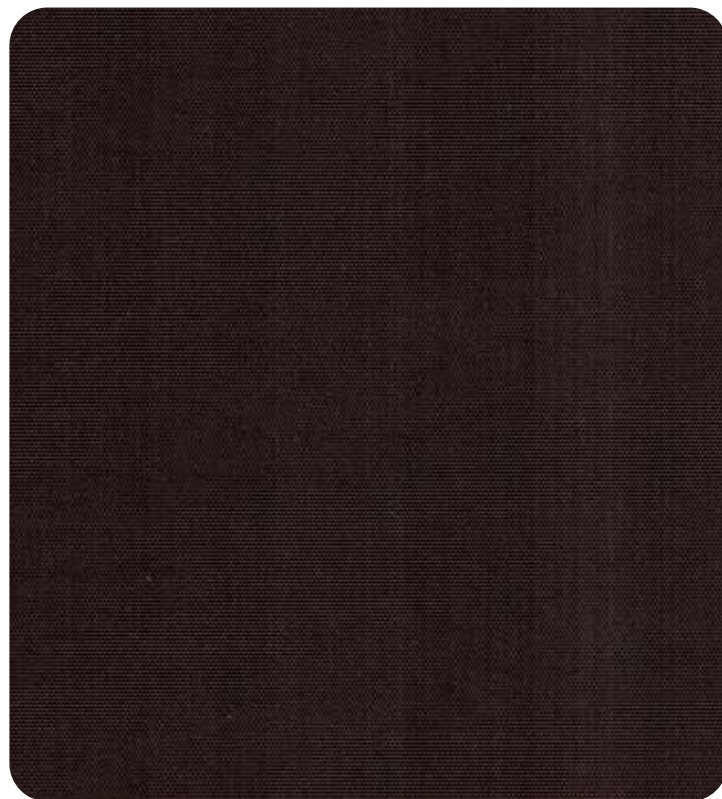**BORDEAUX** 0-002-92-01098**PUMPKIN** 0-002-92-00998**CAPPUCCINO** 0-002-92-00798**CHOCOLATE** 0-002-92-00898

SOUTH BEACH

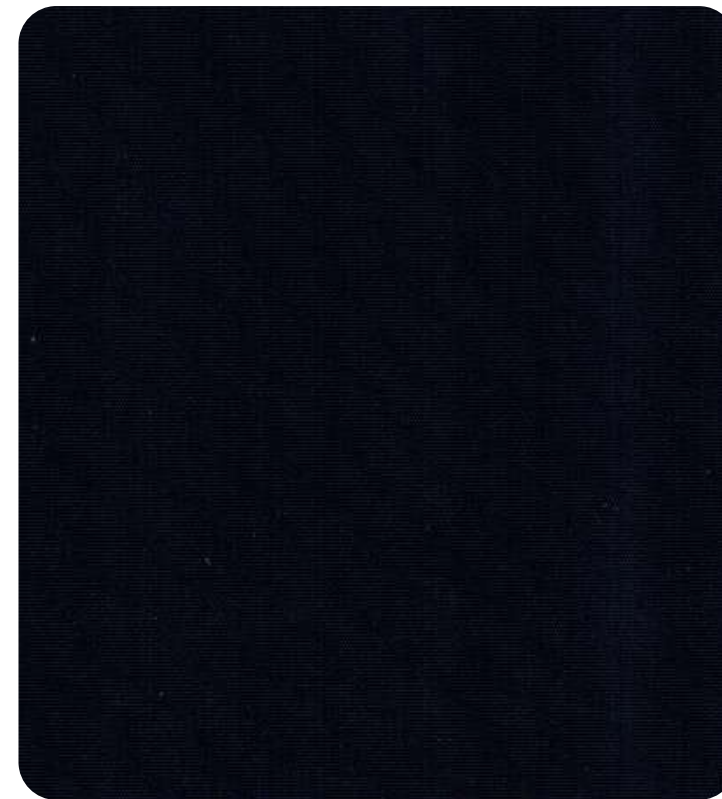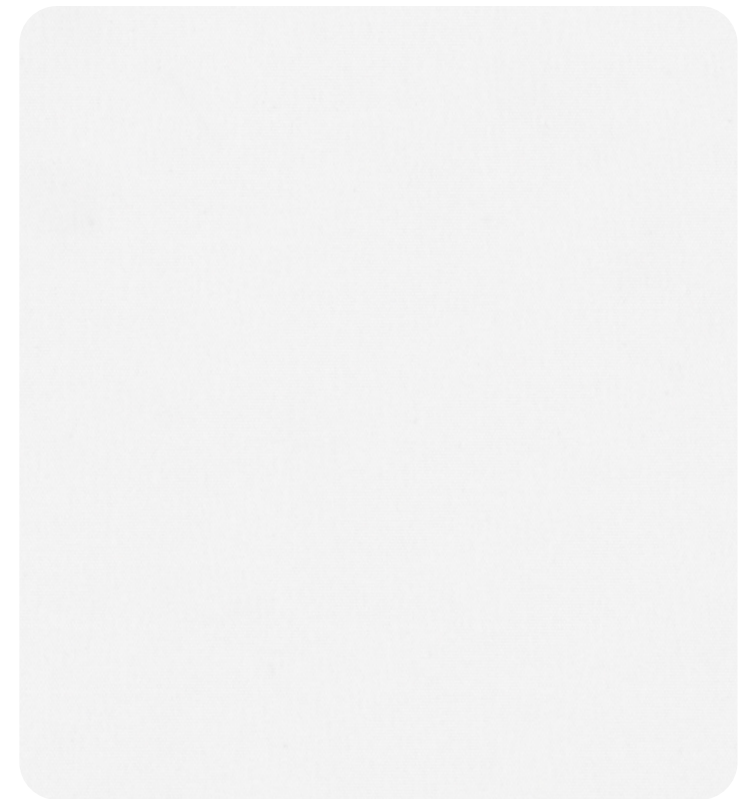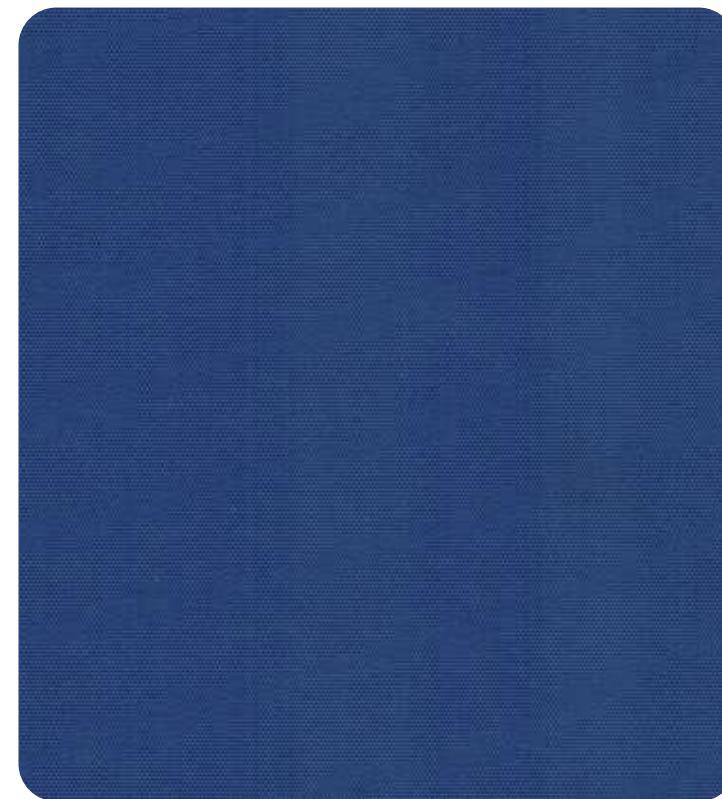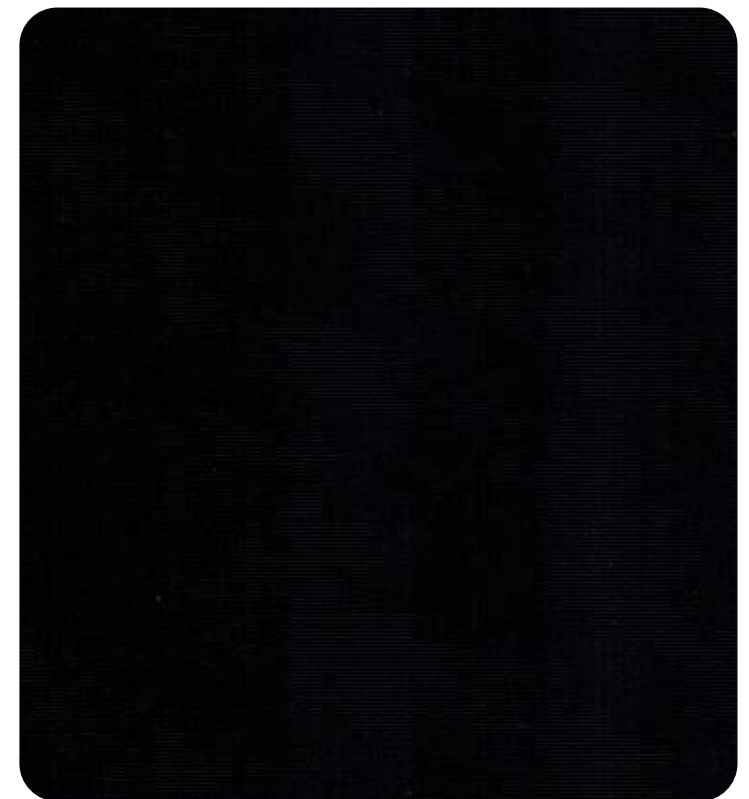**NAVY** 0-002-92-01498**PURE WHITE** 0-002-92-01998**ROYAL BLUE** 0-002-92-01398**EBONY** 0-002-92-01798

URBAN-CHIC SOUTH BEACH



TECHNICAL PROPERTIES

Composition	100% PES
Weight	212 g/m² ± 5% 6.25 oz/yd² ± 5%
Thickness	0.39 mm ± 5% 0.015 in ± 5%
Yarn Account	Warp: 300 D Weft: 300 D
Roll Width	2.5 m 98 in
Coating Type	Acrylic transparent coating

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

MANUFACTURING



Use Only on
Roll Direction



Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades



Sliding
Panels



Indoor Use
Only

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

Visita nuestro blog

Ideas para tu espacio

[Ir ahora ▶](#)



THE ROLLUX BOOK




TRIBECA FR

PVC FREE SCREEN


COLECCIÓN DECORATIVE

TRIBECA FR

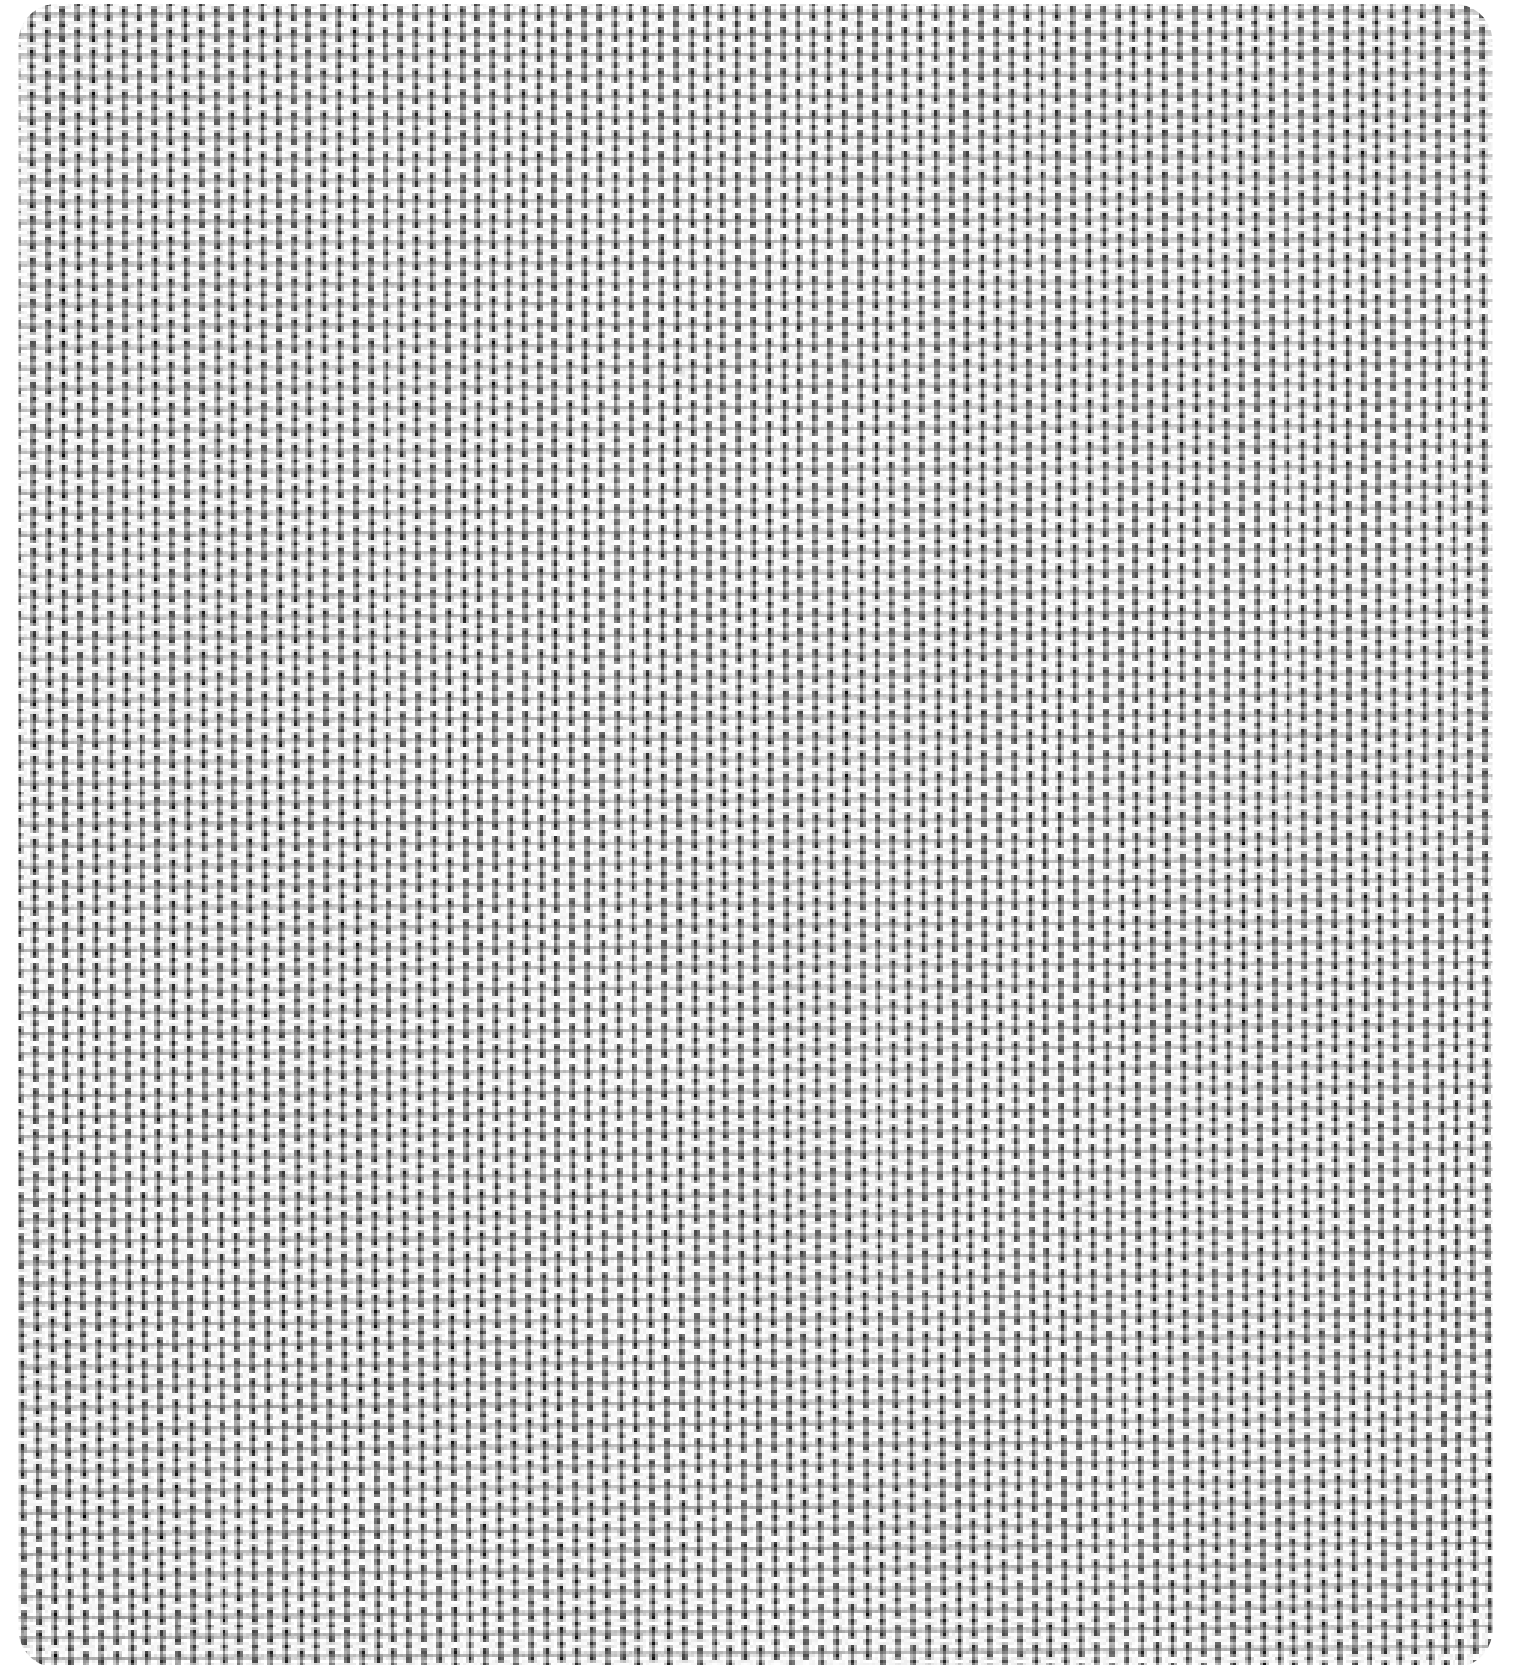


WHITE 0-002-04-00100


TRIBECA FR

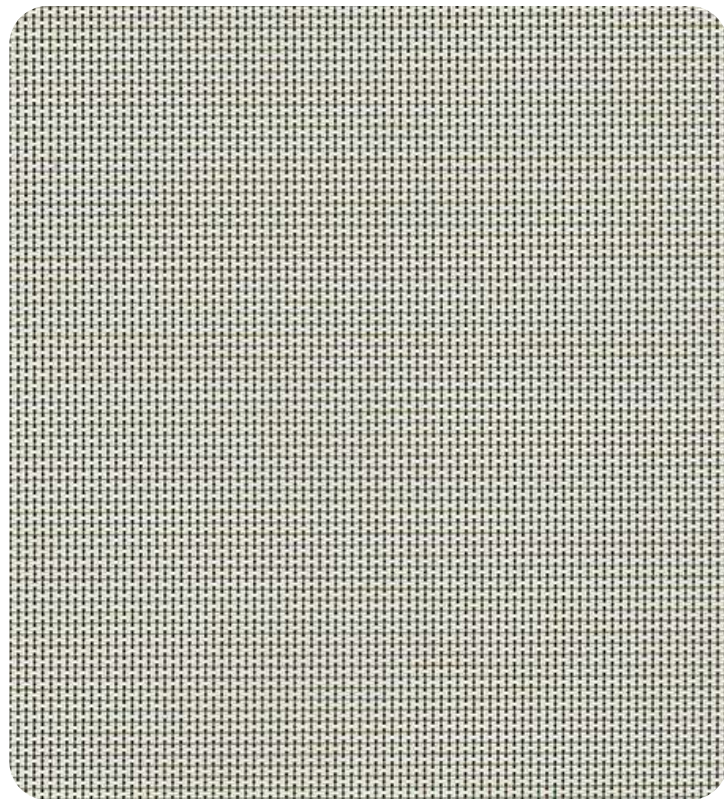


IVORY 0-002-04-00600

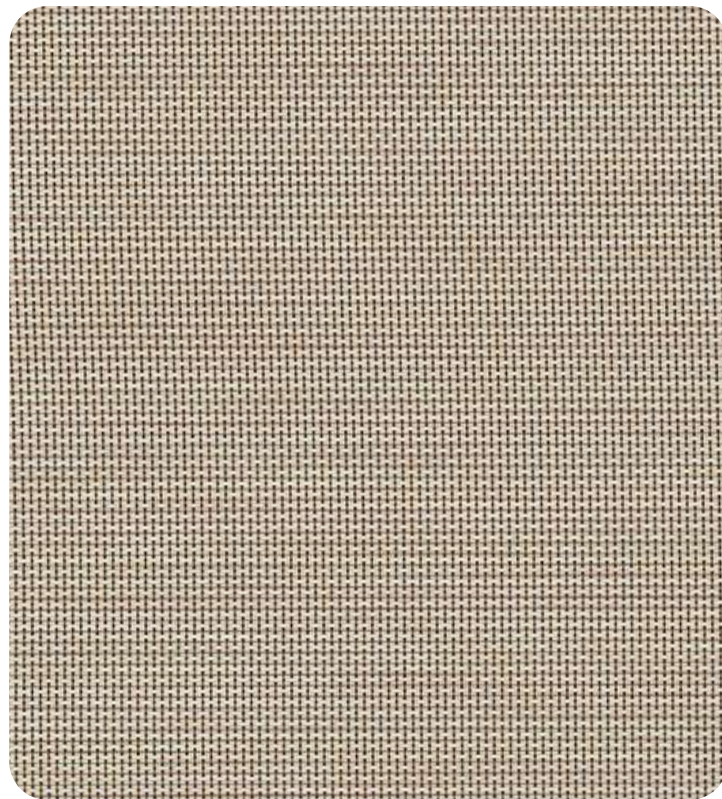

SAND 0-002-04-00200

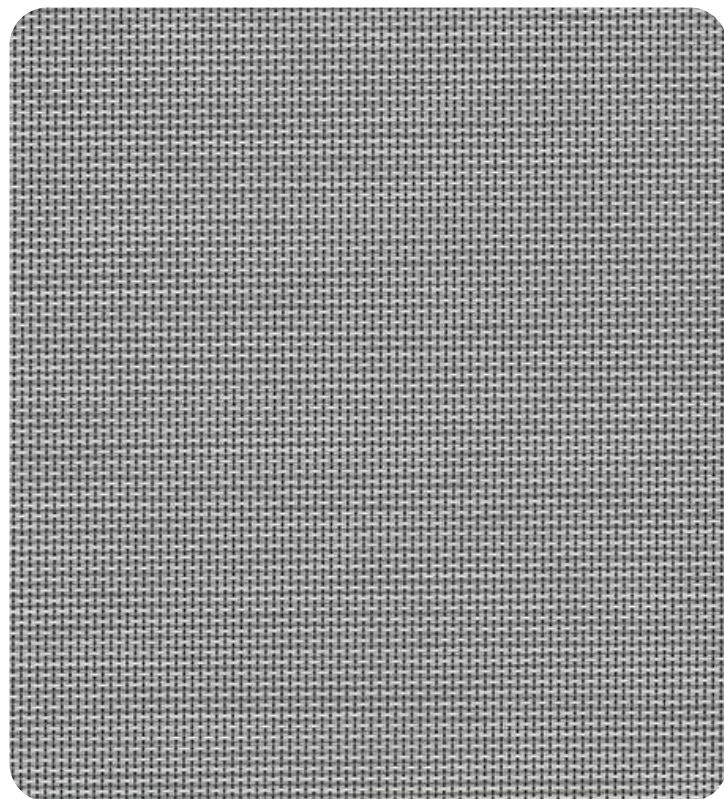


PEARL 0-002-04-00300

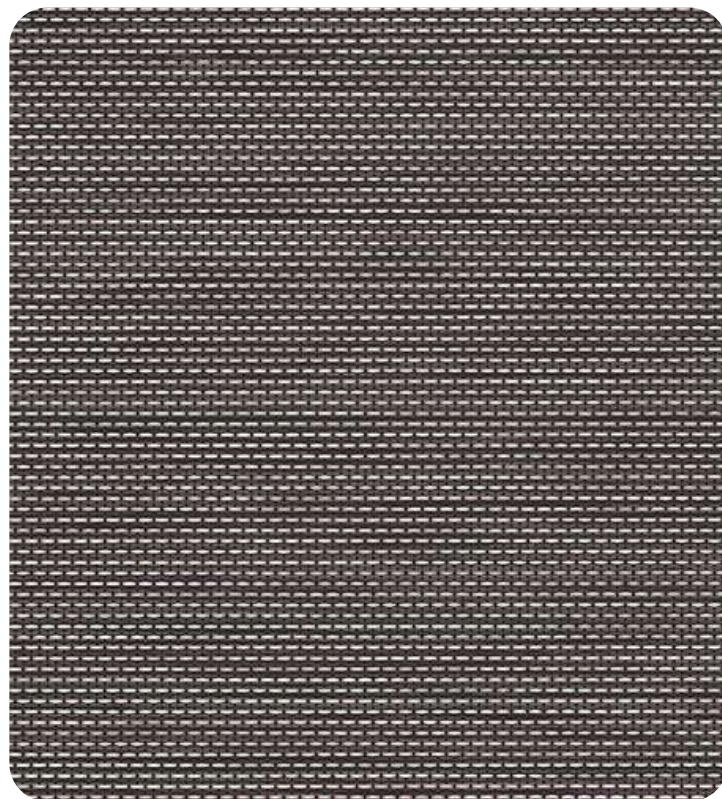

CHOCOLATE 0-002-04-00400

TRIBECA FR

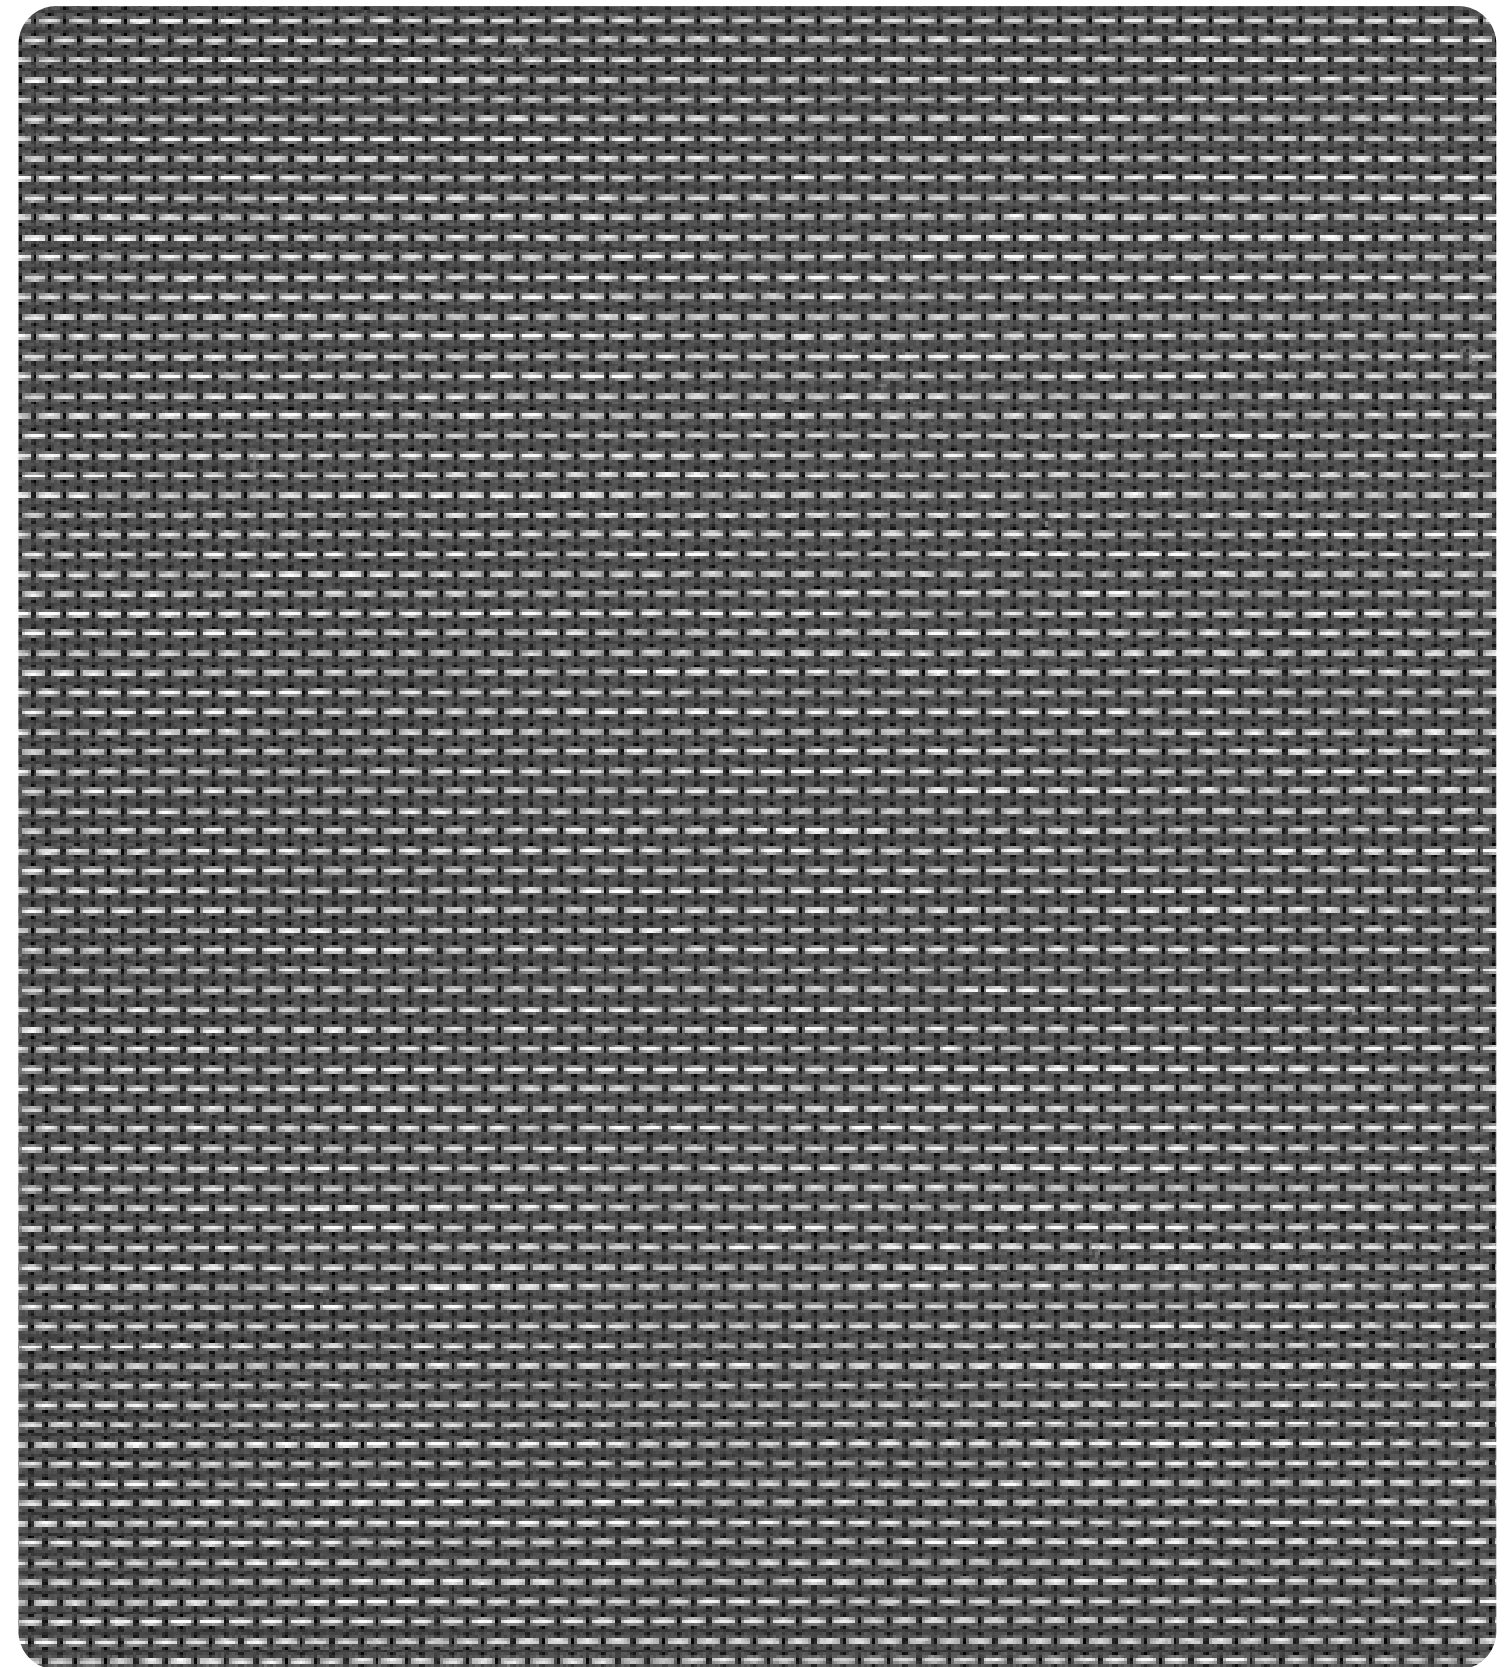

TARMAC 0-002-04-00500

Blackout

Decorative

Vision

Sheerlux

[INICIO](#)

PVC FREE SCREEN

TRIBECA FR



TECHNICAL PROPERTIES

Composition	100% PES
Weight	170 g/m² (± 5%) 5.01 oz/yd² (± 5%)
Thickness	0.45 mm (± 5%) 0.018 in (± 5%)
Roll Width	2.8 m 110.2 in
Roll Length	50 m 54.68 yd
Tensile Strength	Warp: 30.5 daN/5cm Weft: 209.7 daN/5cm
Tearing Strength	Warp: 0.7 daN Weft: 1.0 daN
Light Fastness (Grey Scale)	4.5 Xenotest Grade
Flame Retardant	NFPA 701: 2015

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

SUN CONTROL PROPERTIES*

UPF	20+ UV-A: 9.7% UV-B: 4.3%
UV-R Blocking	91.9%
UV-A Blocking	90.3%
UV-B Blocking	95.7%
Transmittance (Ts)	25.5%
Reflectance (Rs)	51.1%
Absorption (As)	23.9%

*Performance evaluations conducted by independent laboratories.

APPLICATIONS



Roller Shades



Sliding Panels



Indoor Use Only

MANUFACTURING



Use Only on Roll Direction

RECOMMENDED USE



Residential Multifamily



Commercial



Hospitality

Visita nuestro blog

Ideas para tu espacio

[Ir ahora ▶](#)


THE ROLLUX BOOK

COLECCIÓN DECORATIVE

Vertilux México



Copyright © 2021. Todos los derechos reservados.

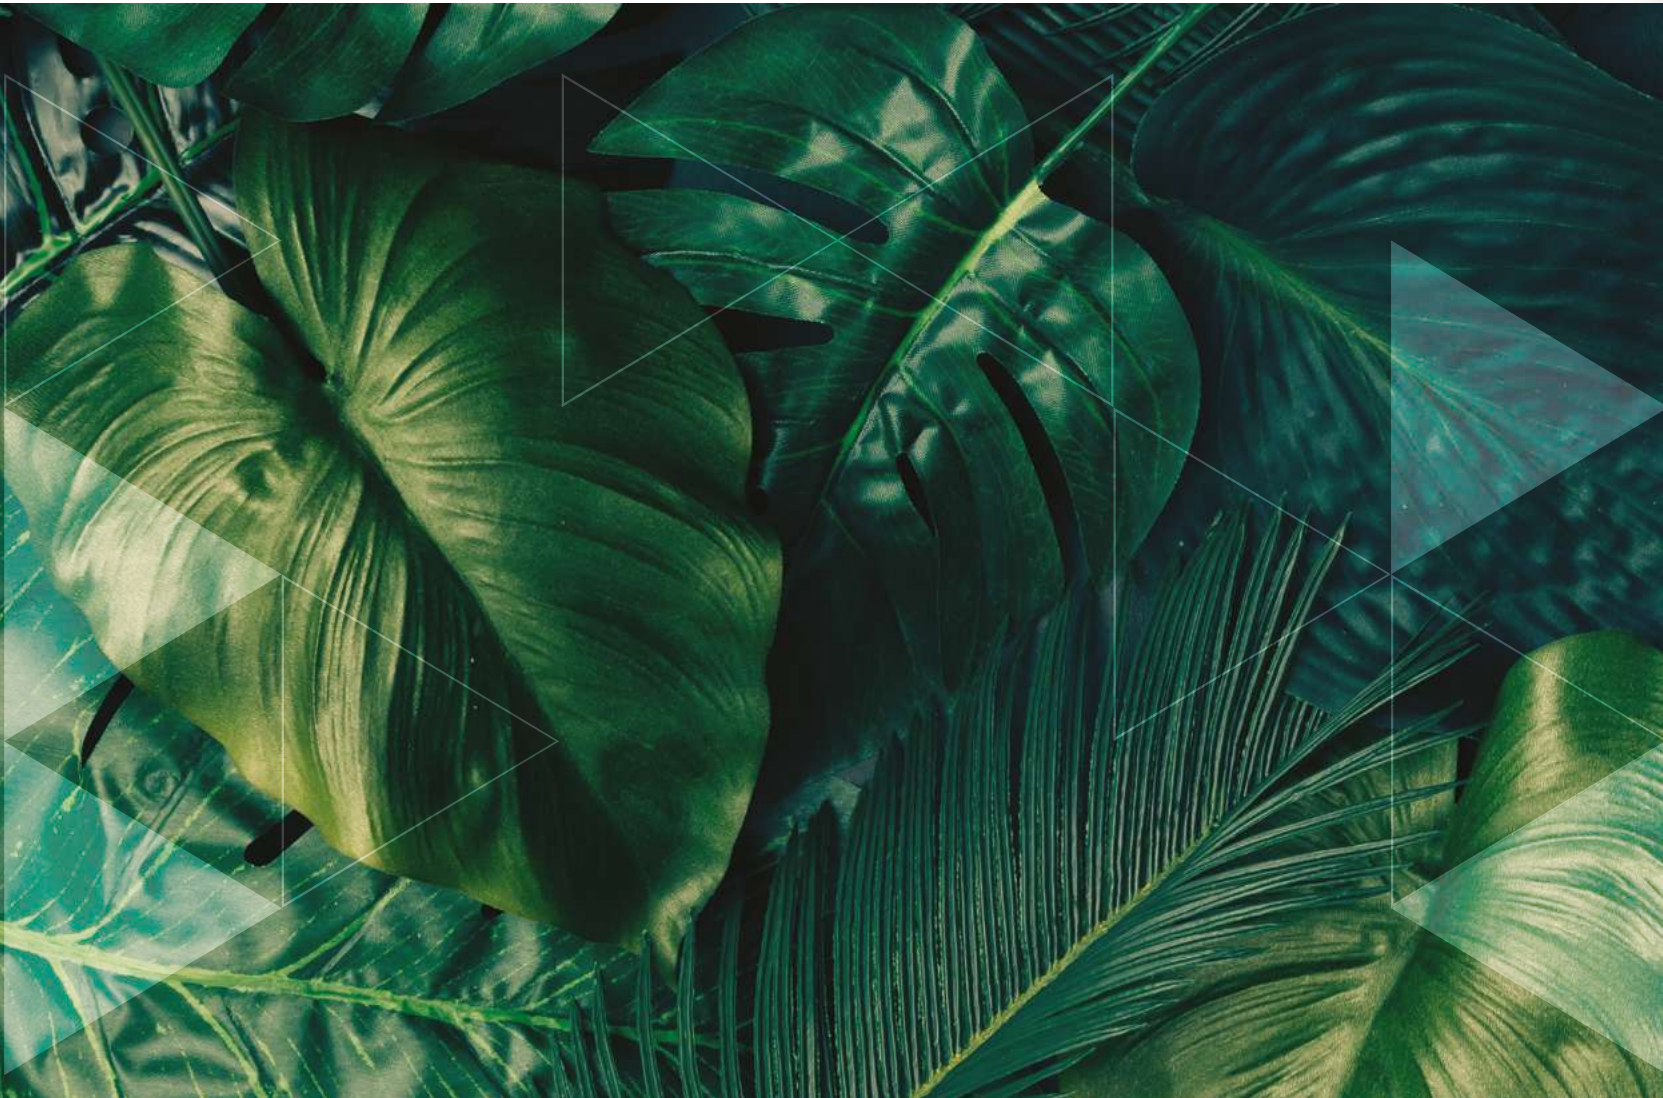


310 SILKEN

URBAN CHIC





COLECCIÓN DECORATIVE

310 SILKEN




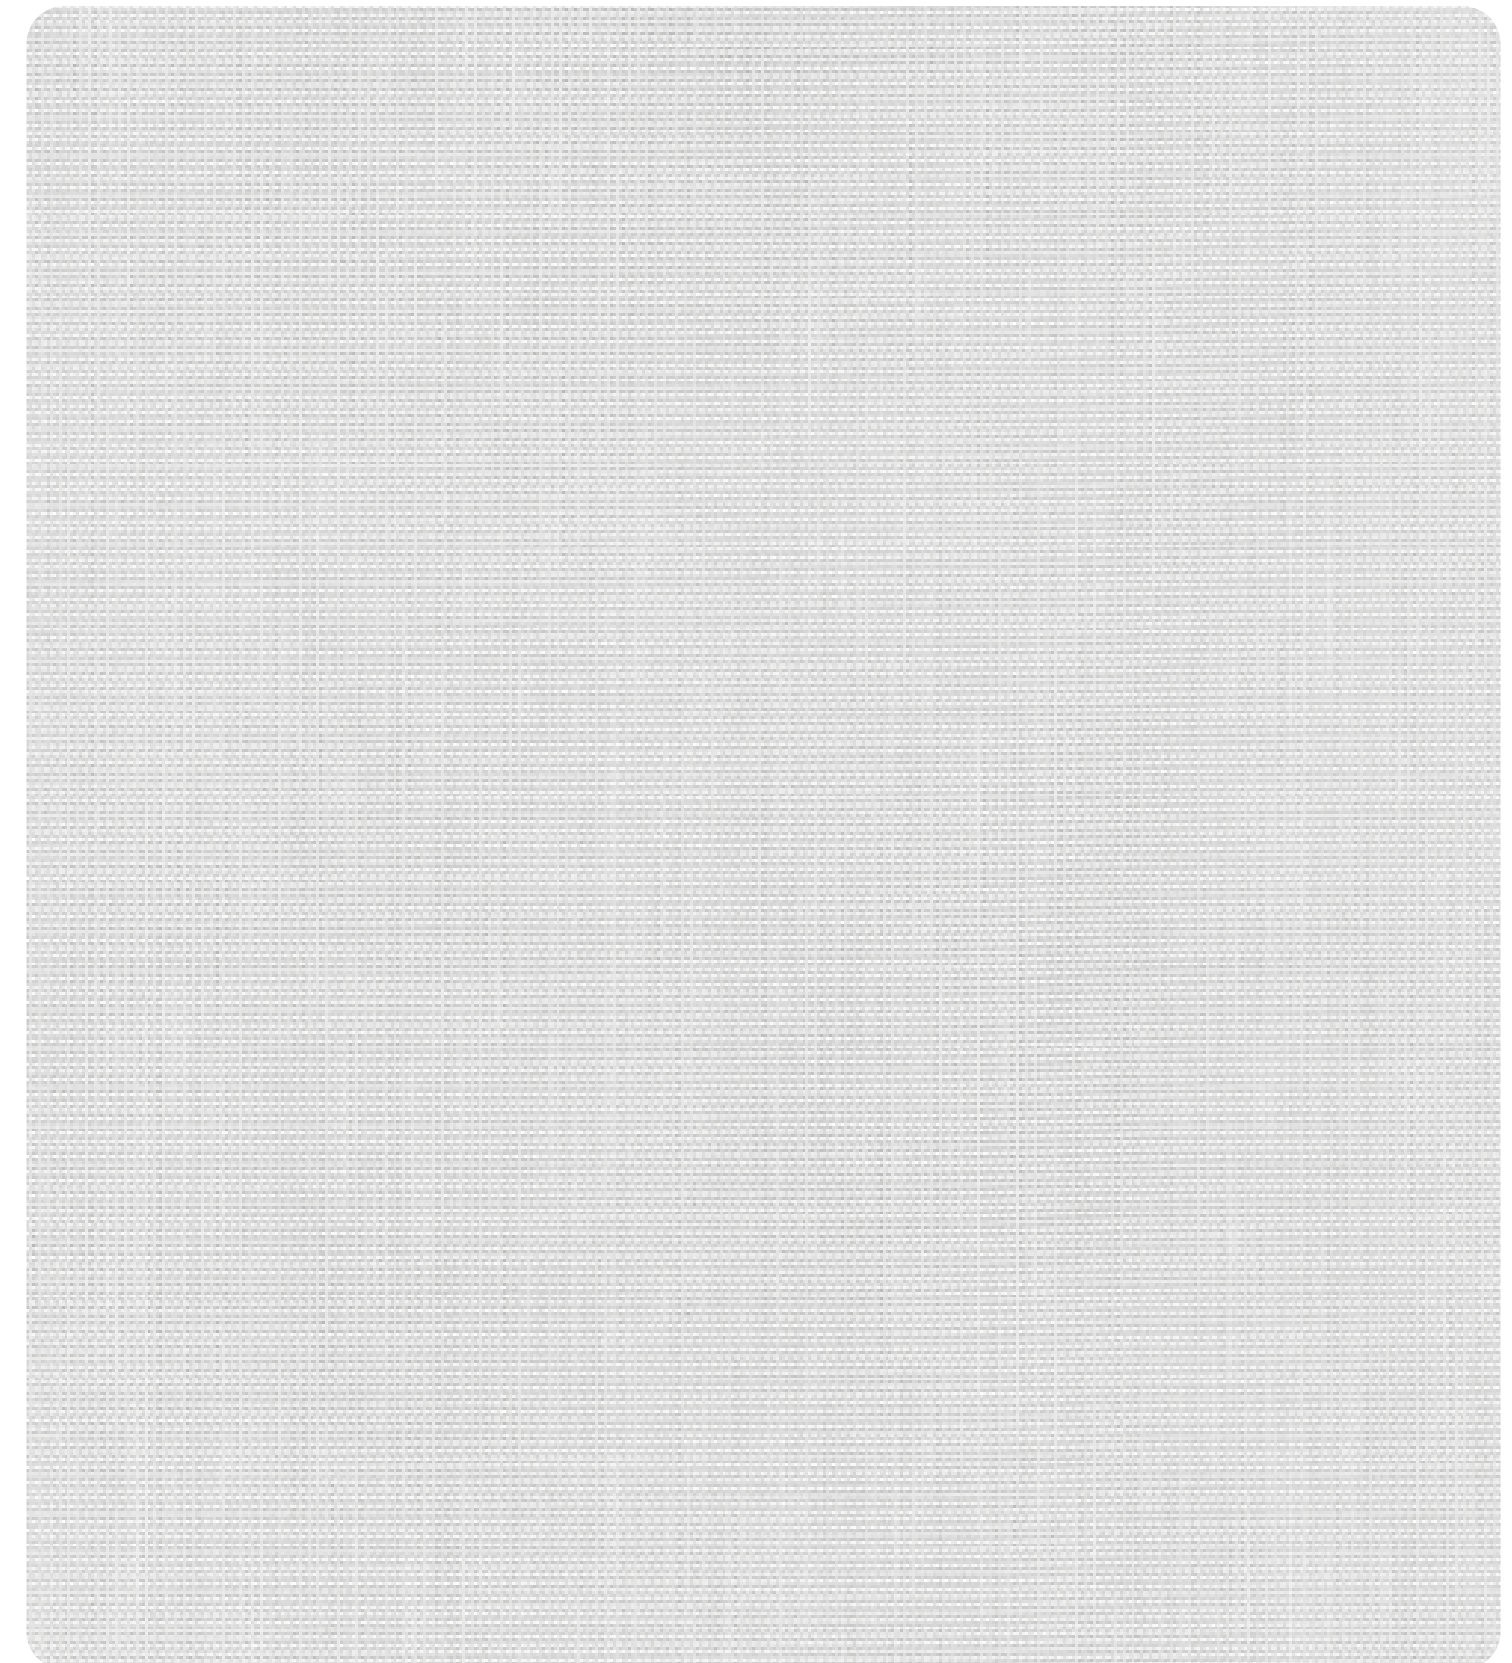


SILVER WHITE 0-004-03-20298




310 SILKEN

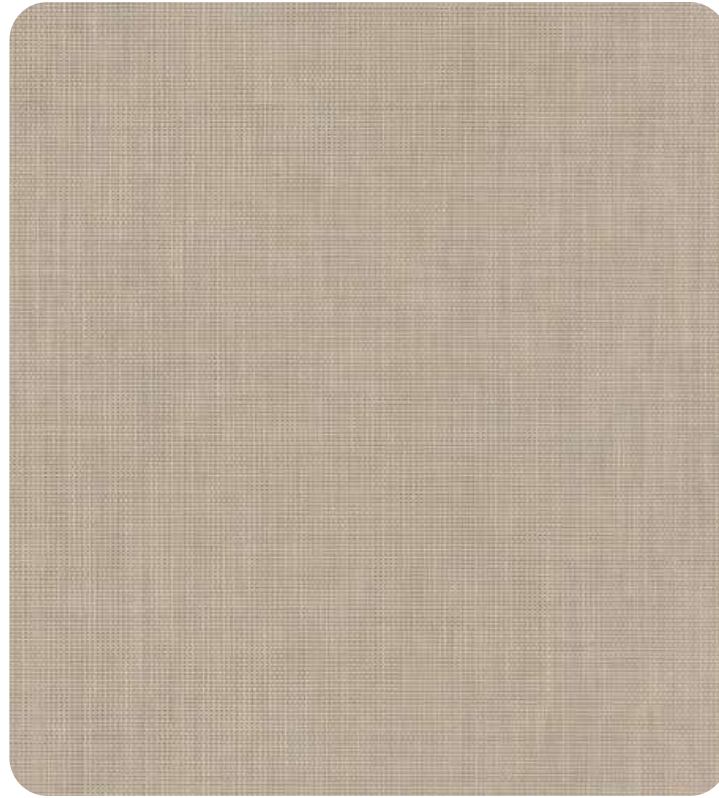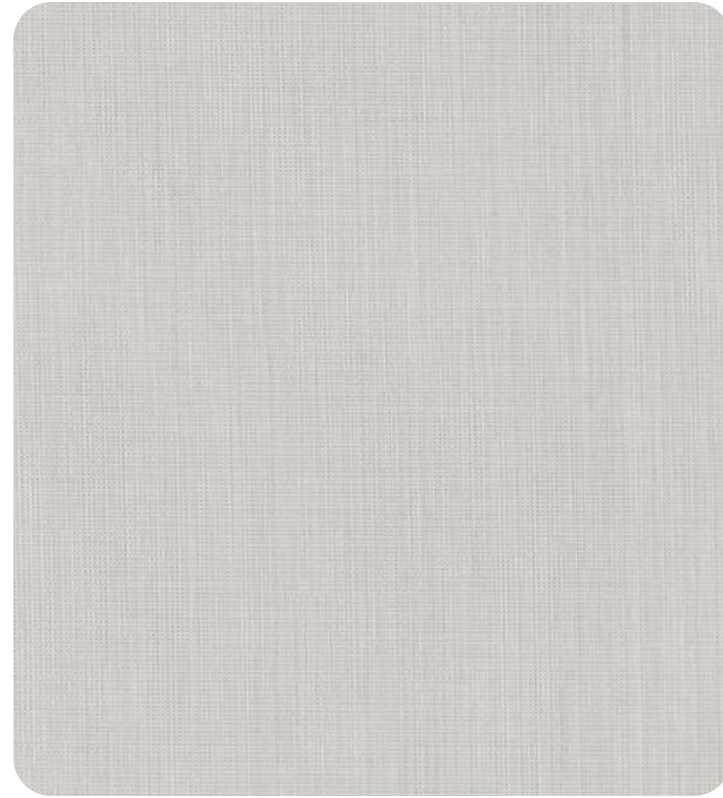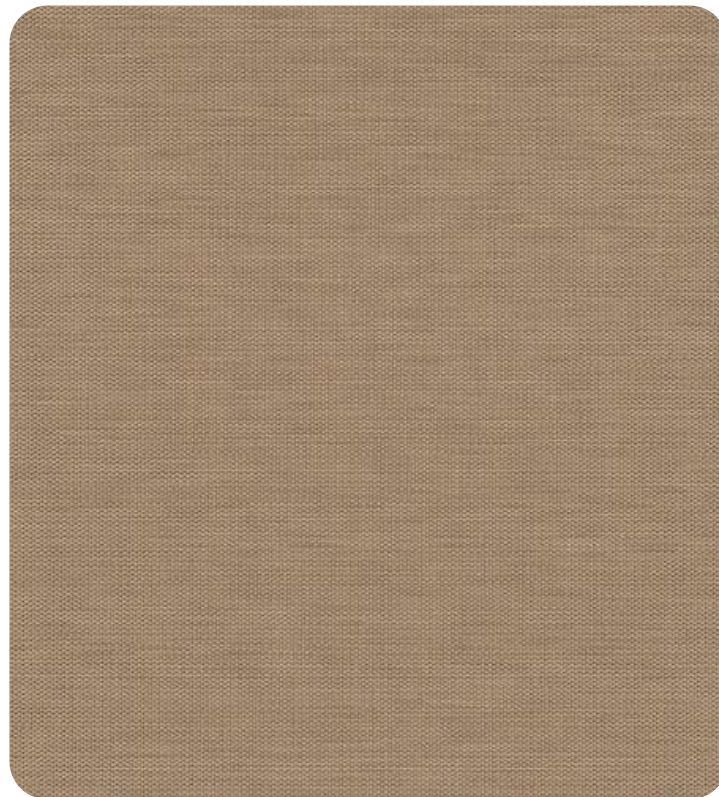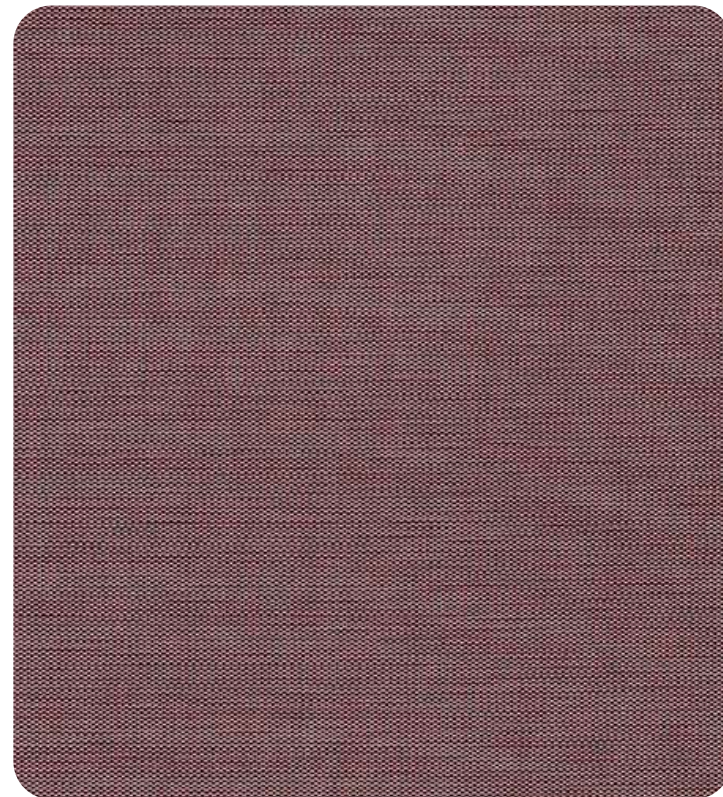**SILVER SKIN** 0-004-03-21798**SILVER LINEN** 0-004-03-20398**SILVER SAND** 0-004-03-21198**SILVER BORDEAUX** 0-004-03-21398



310 SILKEN

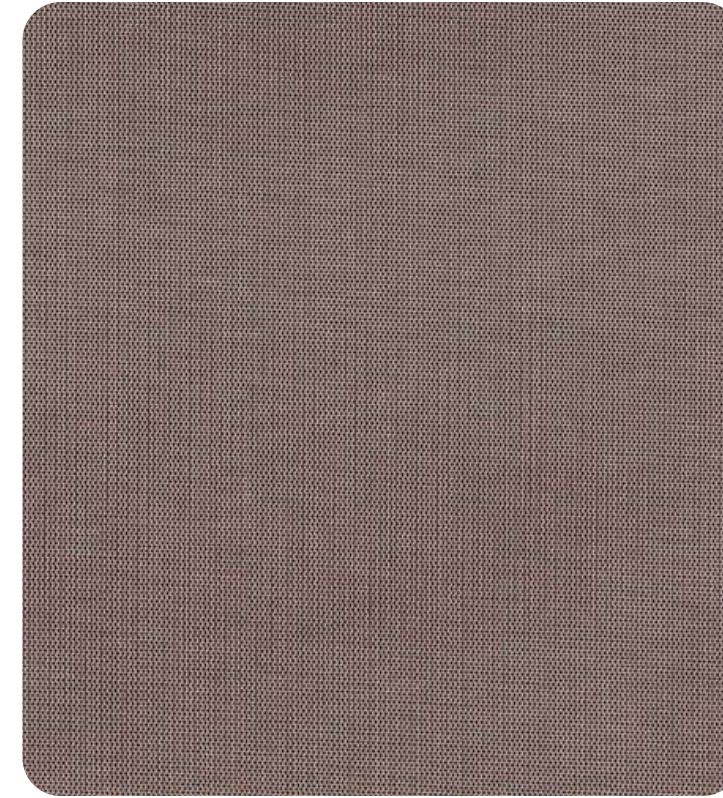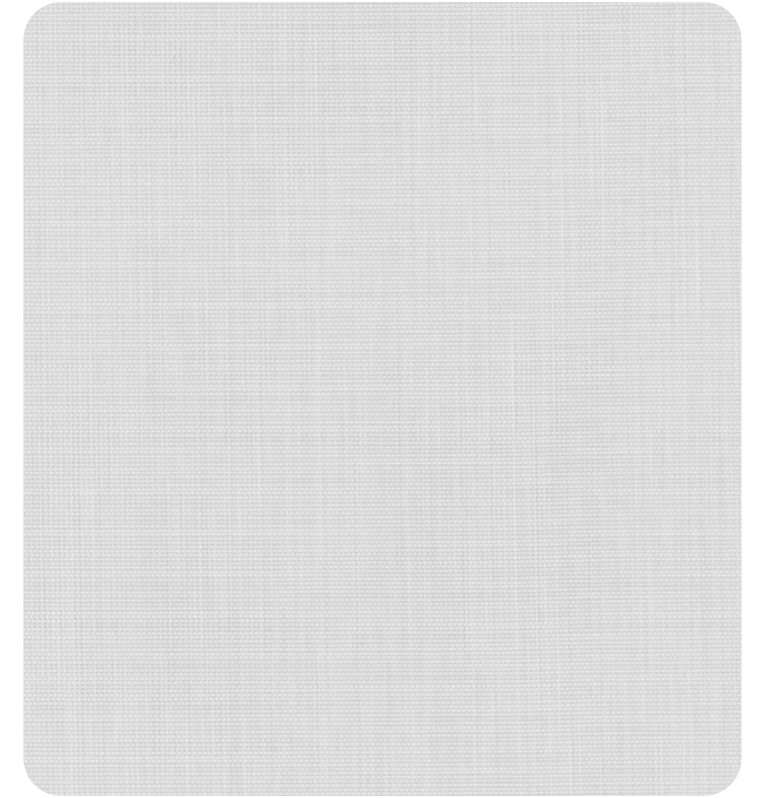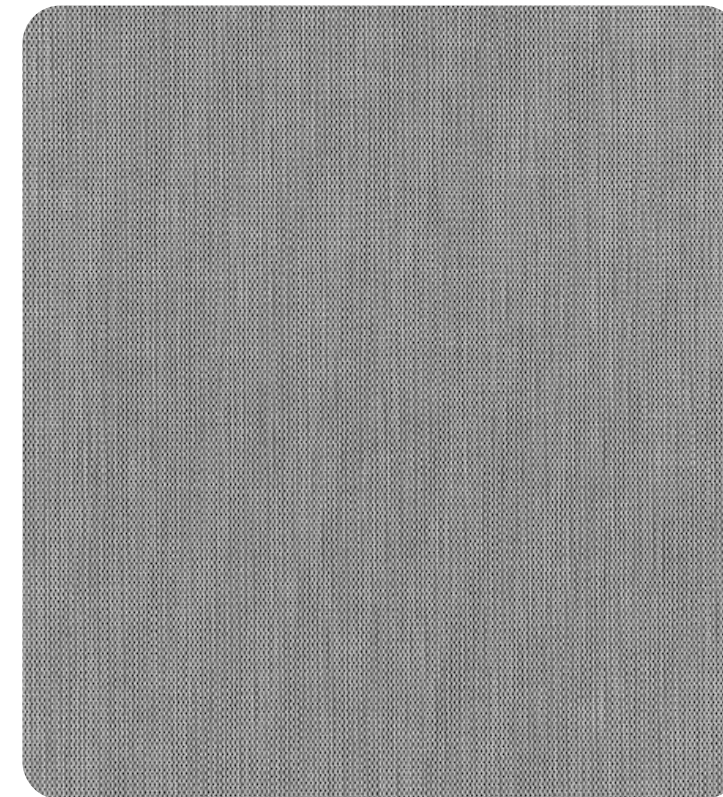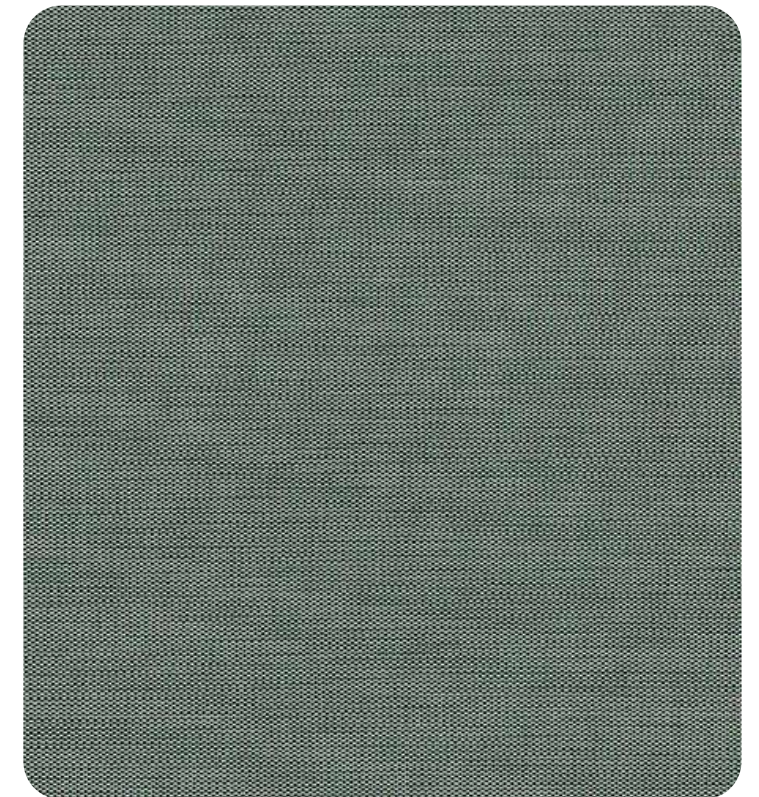**SILVER CHOCOLATE** 0-004-03-21998**SILVER STEEL BLUE** 0-004-03-20298**SILVER GREY** 0-004-03-21298**SILVER DARK GREEN** 0-004-03-21498

310 SILKEN

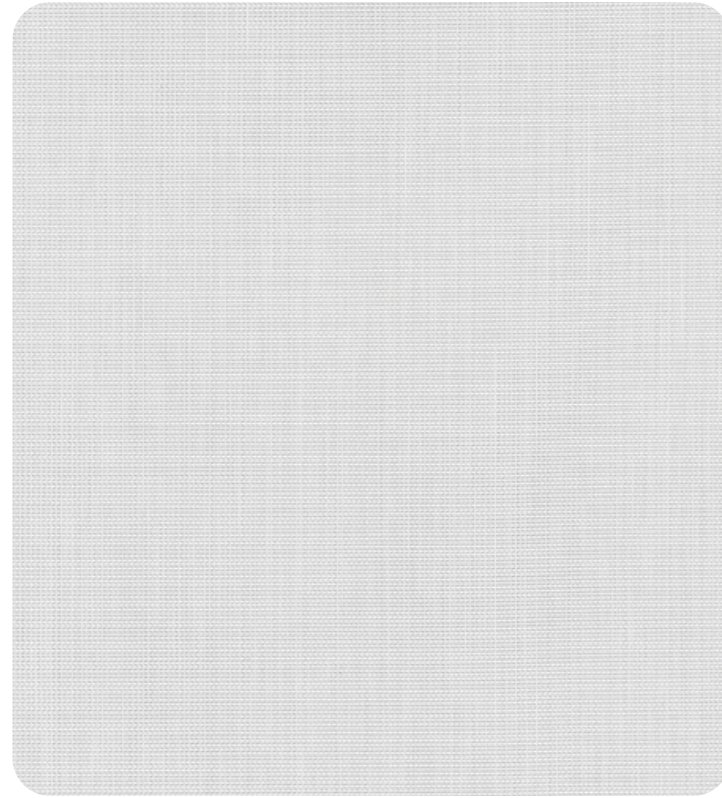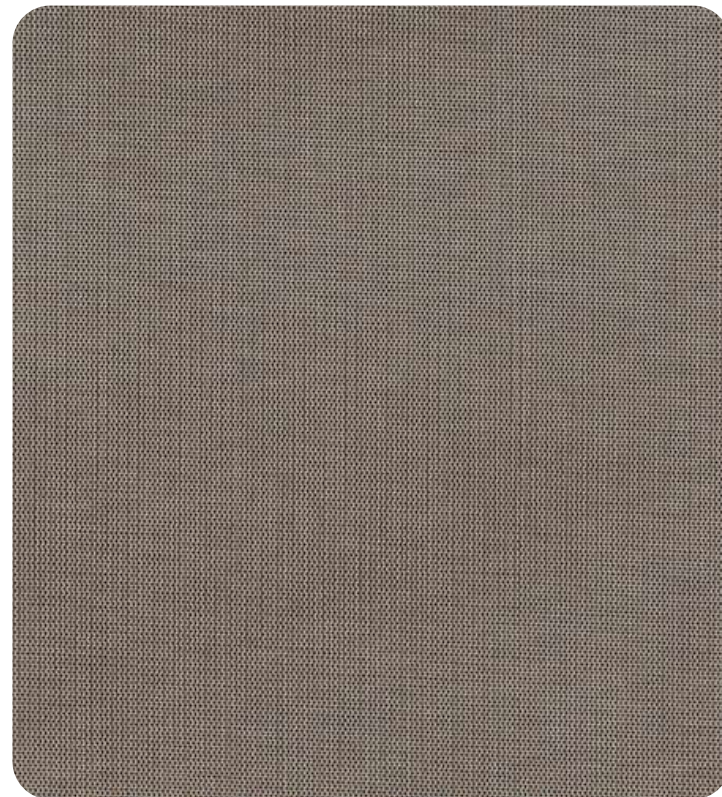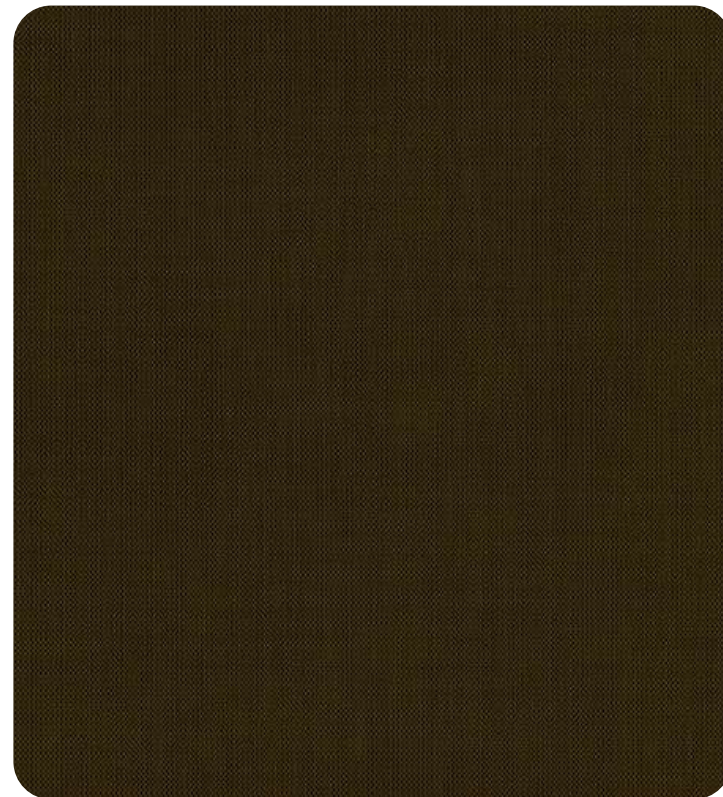**SILVER NAVY** 0-004-03-20298**SILVER BRONZE** 0-004-03-21098**SILVER MOCHA** 0-004-03-21898**GOLD EBONY** 0-004-03-92198

310 SILKEN

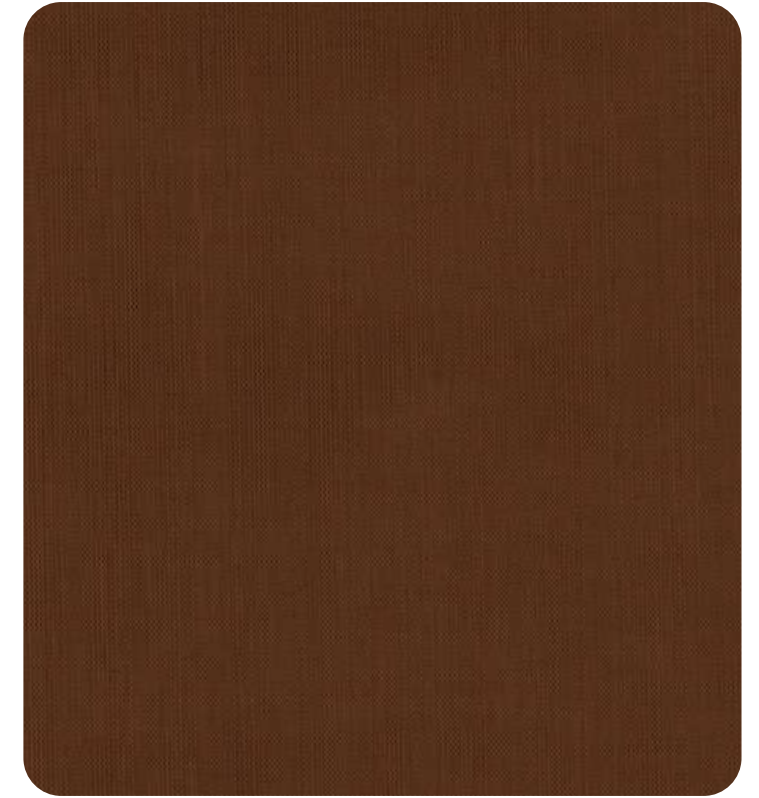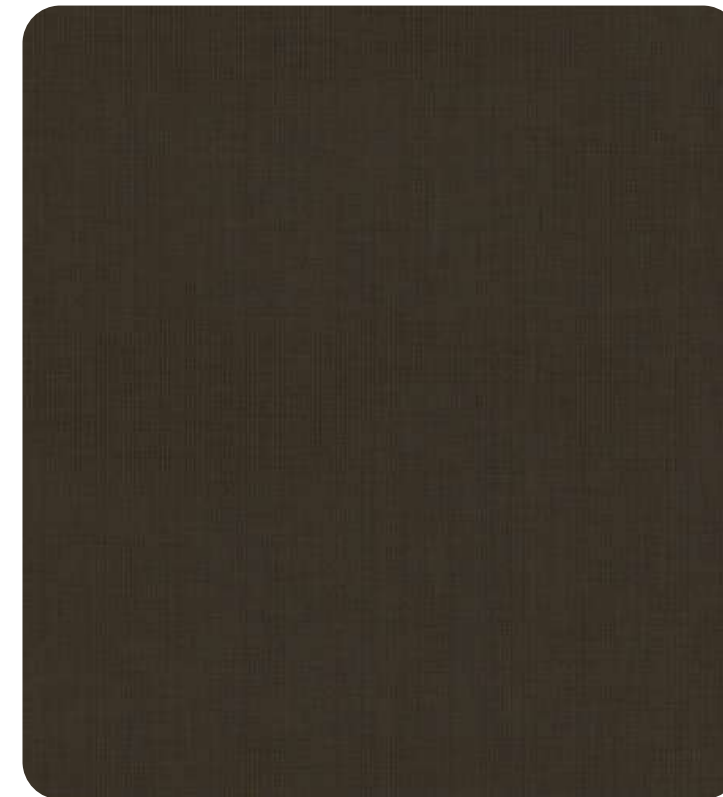**GOLD YELLOW** 0-004-03-91198**GOLD RED** 0-004-03-90898**GOLD BLUE** 0-004-03-94398

GLEAMOROUS 310 SILKEN



TECHNICAL PROPERTIES

Composition	-	20% HT-PES + 80% PVC
Weight	UNE EN 12127	337 g/m2 ± 5% 9.93 oz/yd2 ± 5%
Yarn / cm	Int. Method	Warp: 17 Weft: 10.2
Yarn Diameter	Int. Method	0.3 mm 0.011 in
Roll Width	-	2.5 m 98.4 in
Openness Factor	-	~14%
UV Blockage	-	~86%
Thickness	UNE EN ISO 5084: 1997	0.56 mm ± 5% 0.022 in ± 5%
Light Fastness (Grey Scale Level)	UNE EN ISO 105 B06: 2002 (Interior)	5/5 4/5 White
	UNE EN ISO 105 B03: 1994 (Exterior)	5/5 4/5 White
	UNE EN ISO 105 B04: 1998 (Exterior)	5/5 4/5 White
	UNE EN ISO 4892-2 (Exterior)	5/5 4/5 White
	UNE EN ISO 105 B02: 2002 (Interior)	8/8 7/8 White
Light Fastness (Blue Scale Level)	UNE EN ISO 13937-3: 2001	Warp: 3.9 daN Weft: 2.7 daN
Tearing Resistance	UNE EN ISO 13934-1: 1999	Warp: 138.6 daN/5cm Weft: 82.6 daN/5cm
Breaking Strength	UNE EN ISO 13934-1: 1999	Warp: 25% Weft: 18%
Stretch	UNE EN ISO 112-017: 92	Without changes in surface
Corrosion in Saline Environment -	ISO 9227: 90	Without changes in surface
Neutral Fog	PV-3900	3 Pass
Odor Test	EN 13773: 2003	Class 1
Flame Retardant	DIN 4102	B1
	EN 13501-1:2007	Bs2d0
	NFPA 701	Pass
	CAN/ULC-S109-03	Pass
	IMO Res. MSC.307 (88)-(2010 FTP Code)	Pass
Wheelmark	-	Yes
Noise Reduction	ASTM 2180-01 and ASTM G21-09	Yes
Microorganism Growth Inhibition	-	2% Pre-Consumer

SUNLIGHT CONTROL PROPERTIES

OPENNESS FACTOR: 14%

COLOR	Tv(%)	Rv(%)	Av(%)
Gold Blue	14	13	73
Gold Ebony	15	09	76
Gold Red	13	12	75
Gold Yellow	14	19	67
Silver Bordeaux	18	17	65
Silver Bronze	20	17	63
Silver Chocolate	23	19	58
Silver Dark Green	20	16	64
Silver Grey	20	21	59
Silver Linen	31	39	30
Silver Mocha	25	21	54
Silver Navy	21	21	58
Silver Sand	27	28	45
Silver Skin	27	32	41
Silver Steel Blue	22	22	56
Silver White	32	43	25

Data measured according to internal methods. Classification of thermal and visual characteristics based on EN 14501.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.



OPTICAL PROPERTIES

GLARE CONTROL	NIGHT PRIVACY	VISUAL CONTACT	DAYLIGHT UTILISATION
Class	Class	Class	Class
-	-	-	-
-	-	-	-
-	-	-	-
0	0	4	2
0	0	3	2
0	0	3	2
0	0	3	2
0	0	3	2
0	0	2	3
0	0	3	3
0	0	3	2
0	0	3	3
0	0	3	3
0	0	3	2
0	0	2	3


Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶



THE ROLLUX BOOK

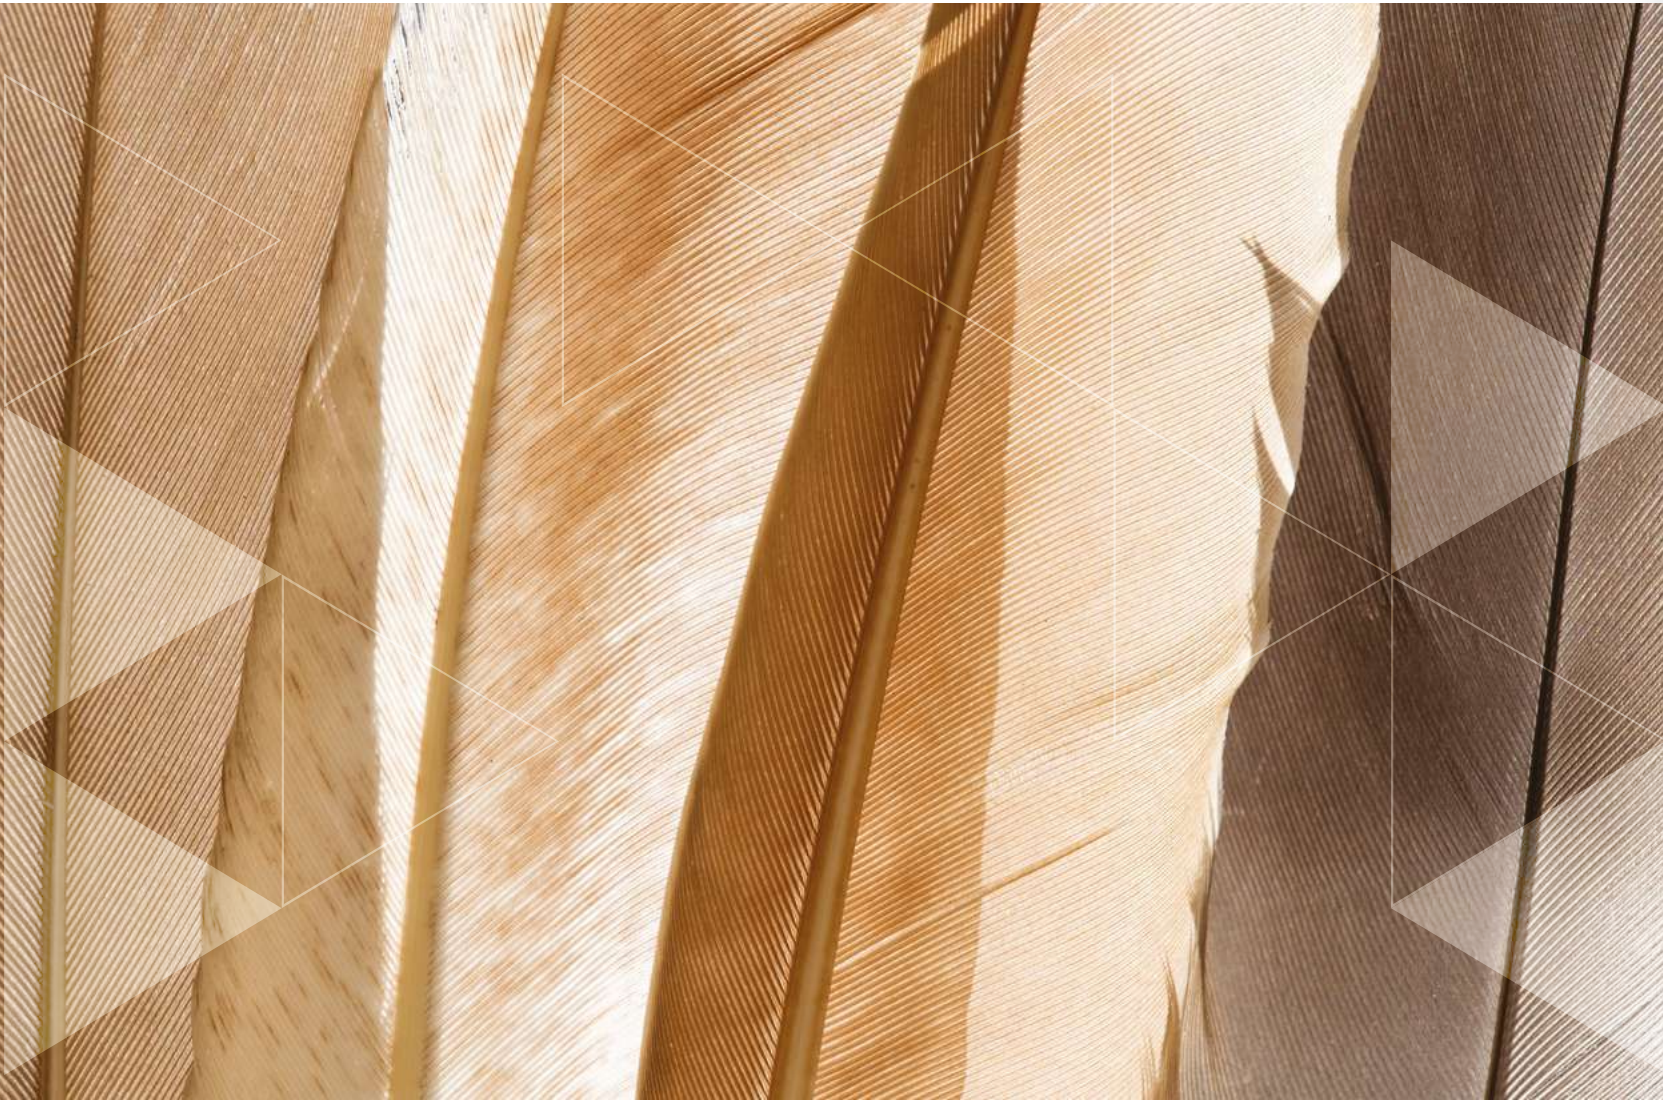

SPICE

GLEAMOROUS

COLECCIÓN DECORATIVE

SPICE



ASH 0-004-28-00498

SPICE



SAND 0-004-28-00398



LINEN 0-004-28-00298



NATURAL 0-004-28-00198



BUCKWHEAT 0-004-28-00598



GLEAMOROUS
SPICE

TECHNICAL PROPERTIES

Composition	-	15% HT-PES + 85% PVC
Weight	UNE EN 12127	650 g/m² ± 5% 19.17 oz/yd² ± 5%
Yarn / cm	Int. Method	Warp: 16 Weft: 15
Yarn Diameter	Int. Method	0.4 mm 0.016 in
Roll Width	-	2.5 m 98.4 in
Openness Factor	-	~3%
UV Blockage	-	~97%
Thickness	UNE EN ISO 5084: 1997	0.80 mm ± 5% 0.031 in ± 5%
Light Fastness (Grey Scale Level)	UNE EN ISO 105 B06: 2002 (Interior)	4/5 4/5 White
	UNE EN ISO 105 B03: 1994 (Exterior)	4/5 4/5 White
	UNE EN ISO 105 B04: 1998 (Exterior)	4/5 4/5 White
	UNE EN ISO 4892-2 (Exterior)	4/5 4/5 White
	UNE EN ISO 105 B02: 2002 (Interior)	7/8 7/8 White
Light Fastness (Blue Scale Level)	UNE EN ISO 105 B02: 2002 (Interior)	7/8 7/8 White
Tearing Resistance	UNE EN ISO 13937-3: 2001	Warp: 8.2 daN Weft: 6.6 daN
Breaking Strength	UNE EN ISO 13934-1: 1999	Warp: 174.0 daN/5cm Weft: 157.0 daN/5cm
Stretch	UNE EN ISO 13934-1: 1999	Warp: 23.0% Weft: 21.0%
Corrosion in Saline Environment - Neutral Fog	UNE EN ISO 112-017: 92 ISO 9227: 90	Without changes in surface Without changes in surface
Odor Test	PV-3900	3 Pass
Flame Retardant	NFPA 701	Pass
Microorganism Growth Inhibition	ASTM 2180-01 and ASTM G21-09	Yes
Recycled Content	-	2% Pre-Consumer

SUNLIGHT CONTROL PROPERTIES

OPENNESS FACTOR: 3%			
COLOR	Tv[%]	Rv[%]	Av[%]
Ash	14	47	39
Buckwheat	11	43	46
Linen	17	60	23
Natural	15	50	35
Sand	15	54	31

OPTICAL PROPERTIES

GLARE CONTROL	NIGHT PRIVACY	VISUAL CONTACT	DAYLIGHT UTILISATION
Class	Class	Class	Class
1	2	1	2
1	2	1	2
1	2	1	2
1	2	1	2
1	2	1	2


Data measured according to internal methods. Classification of thermal and visual characteristics based on EN 14501.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶

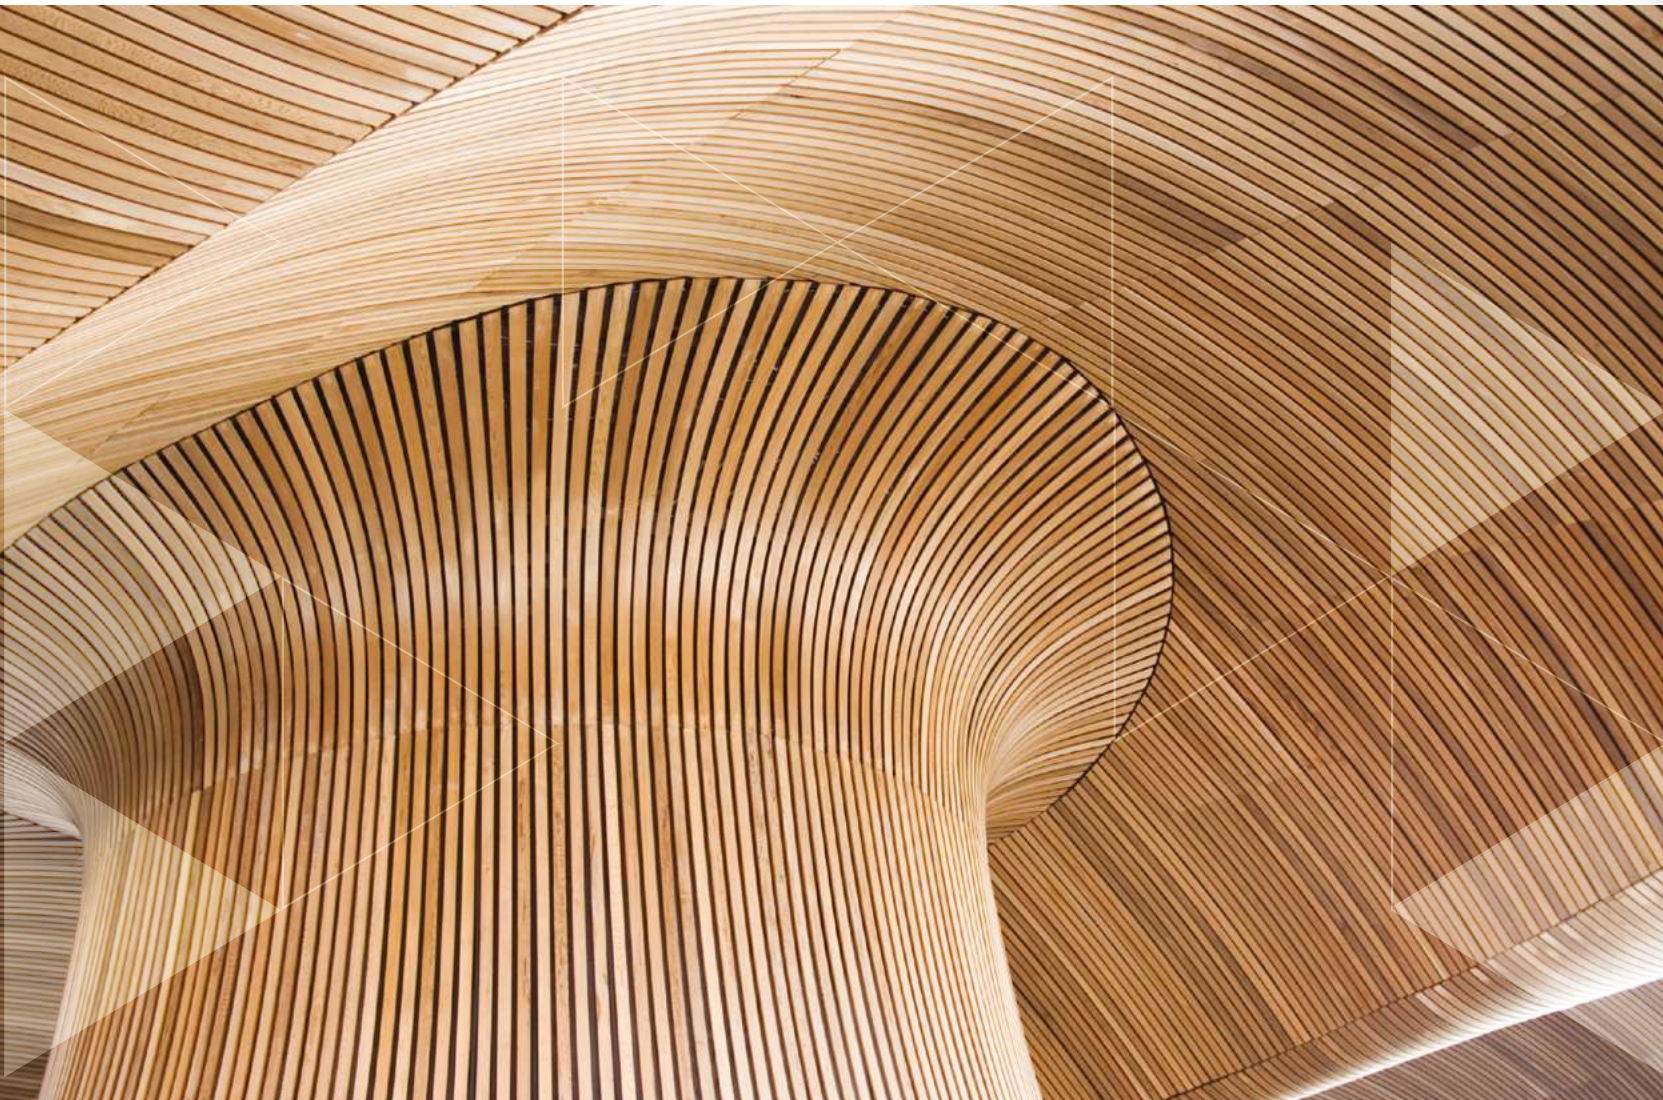


550 CALICO

GLEAMOROUS

COLECCIÓN DECORATIVE

550 CALICO

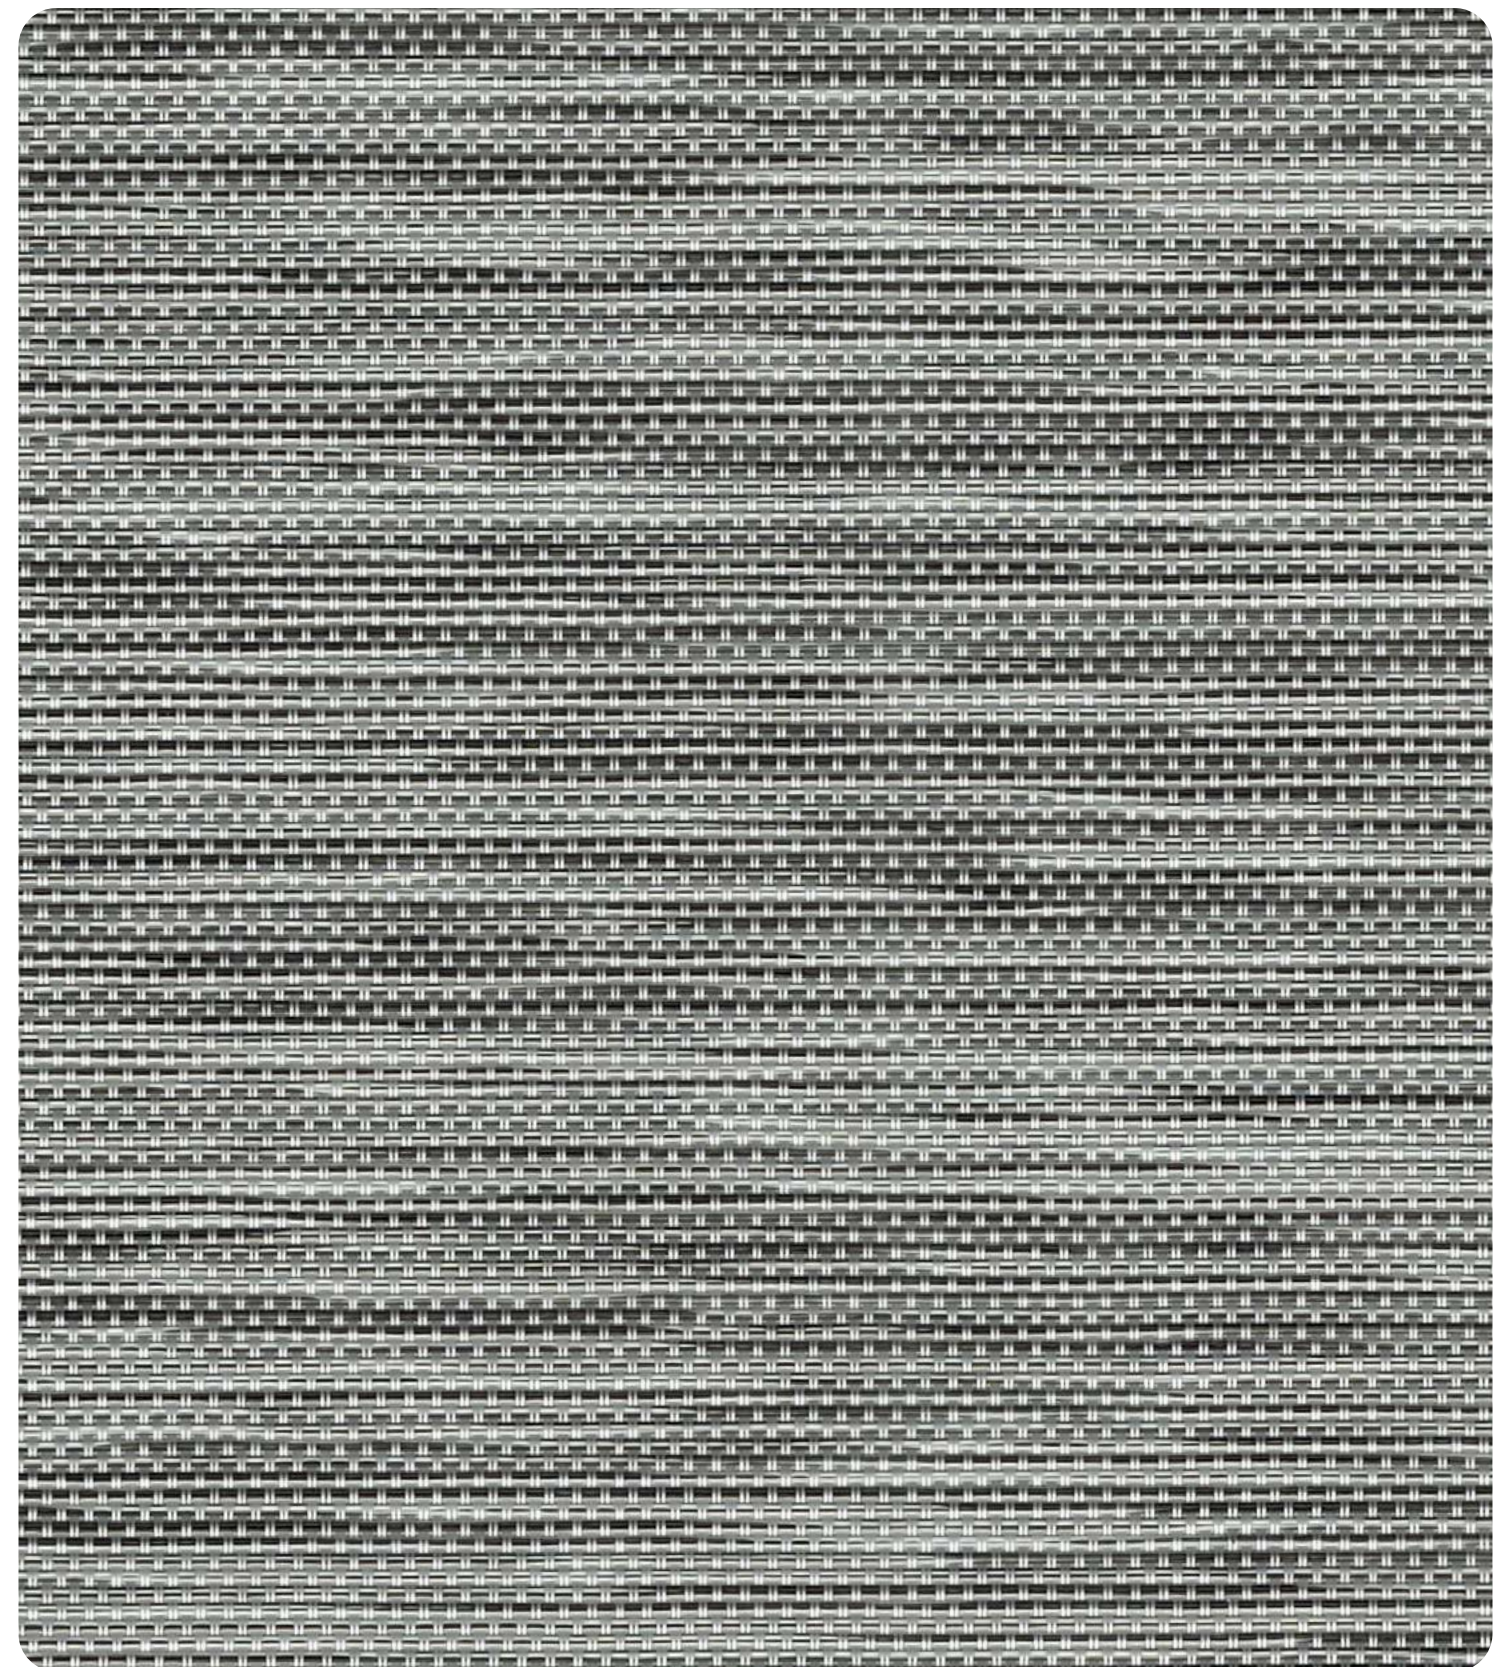


BRONZE CUSTARD 0-004-21-00998

550 CALICO




SAND CUSTARD 0-004-21-00198

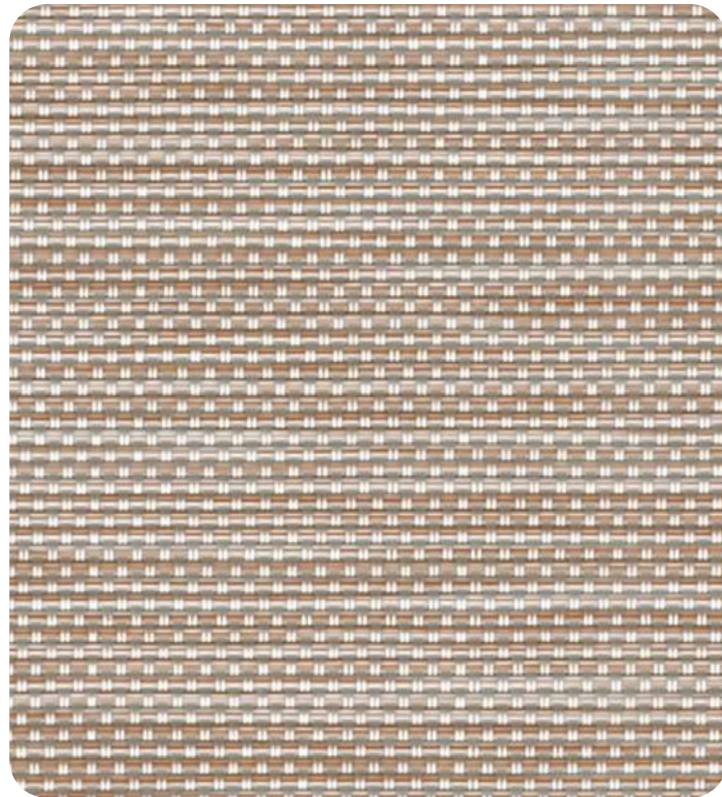

SAND LINEN 0-004-21-00298



GOLD CUSTARD 0-004-21-00598

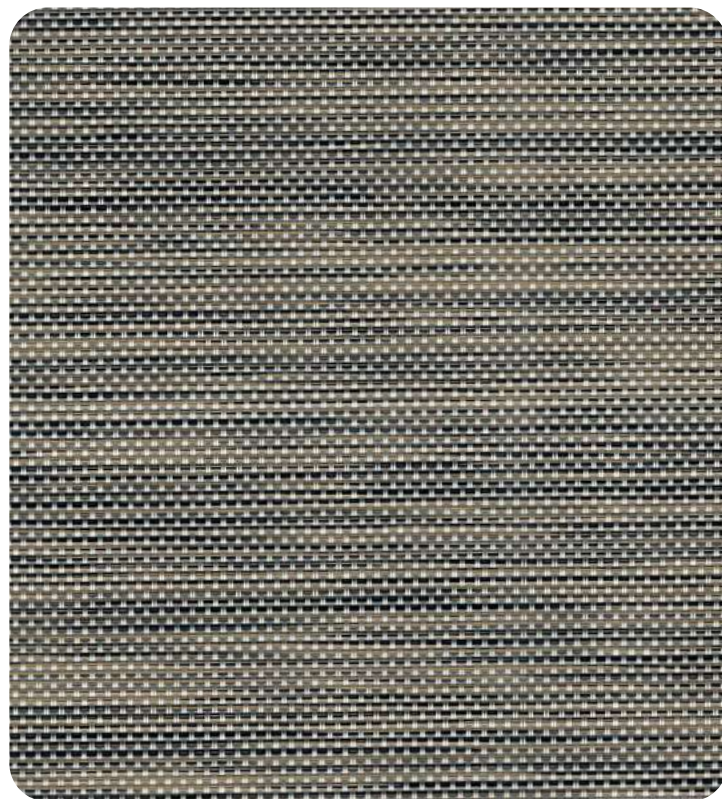

SAND EBONY 0-004-21-00798

550 CALICO



EBONY SAND 0-004-21-01298

GLEAMOROUS
550 CALICO



TECHNICAL PROPERTIES

Composition	-	5% HT-PES + 85% PVC
Weight	UNE EN 12127	610 g/m² ± 5% 17.99 oz/yd² ± 5%
Yarn / cm	Int. Method	Warp: 16 Weft: 13.5
Yarn Diameter	Int. Method	0.4 mm 0.016 in
Roll Width	-	2.5 m 98.4 in
Openness Factor	-	~5%
UV Blockage	-	~95%
Thickness	UNE EN ISO 5084: 1997	0.69 mm ± 5% 0.027 in ± 5%
Light Fastness (Grey Scale Level)	UNE EN ISO 105 B06: 2002 (Interior)	5/5 4/5 White
	UNE EN ISO 105 B03: 1994 (Exterior)	5/5 4/5 White
	UNE EN ISO 105 B04: 1998 (Exterior)	5/5 4/5 White
	UNE EN ISO 4892-2 (Exterior)	5/5 4/5 White
Light Fastness (Blue Scale Level)	UNE EN ISO 105 B02: 2002 (Interior)	8/8 7/8 White
Tearing Resistance	UNE EN ISO 13937-3: 2001	Warp: 6.6 daN Weft: 5.3 daN
Breaking Strength	UNE EN ISO 13934-1: 1999	Warp: 174.0 daN/5cm Weft: 133.0 daN/5cm
Stretch	UNE EN ISO 13934-1: 1999	Warp: 22.0% Weft: 21.0%
Corrosion in Saline Environment - Neutral Fog	UNE EN ISO 112-017: 92	Without changes in surface
Odor Test	ISO 9227: 90	Without changes in surface
Flame Retardant	PV-3900	3 Pass
	EN 13773: 2003	Class 1
	EN 13501-1:2007	Bs2d0
	DIN 4102	B1
	NFPA 701	Pass
Microorganism Growth Inhibition	UNI 9177	Class 1
	ASTM 2180-01 and ASTM G21-09	Yes
Recycled Content	-	2% Pre-Consumer

SUNLIGHT CONTROL PROPERTIES

OPENNESS FACTOR: 5%

COLOR	Tv(%)	Rv(%)	Av(%)
Bronze Custard	19	26	55
Ebony Sand	10	08	82
Gold Custard	23	29	48
Sand Custard	27	44	29
Sand Ebony	17	20	63
Sand Linen	23	34	43

Data measured according to internal methods. Classification of thermal and visual characteristics based on EN 14501.

OPTICAL PROPERTIES

GLARE CONTROL	NIGHT PRIVACY	VISUAL CONTACT	DAYLIGHT UTILISATION
Class	Class	Class	Class
1	2	1	2
1	2	1	2
1	2	0	2
1	2	0	3
1	2	1	2
1	2	0	2

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶

THE ROLLUX BOOK
COLECCIÓN DECORATIVE



Queda prohibida la reproducción y/o edición parcial o total de este documento, ya sea en medios electrónicos, fotocopiado, escaneado o cualquier otro, sin el permiso previo y por escrito de Vertilux, así como Vertilux no se hace responsable por el mal uso de nuestro catálogo digital, el uso de copias en tejidos, mecanismos y perfiles de aluminio que no están avalados por la marca y todo uso de componentes ajenos invalida cualquier garantía parcial o total.

Copyright © 2021. Todos los derechos reservados.



THE ROLLUX BOOK

Tejidos para persianas enrollables

COLECCIÓN VISION POLYSCREEN

THE ROLLUX BOOK

COLECCIÓN VISION POLYSCREEN

▶ 174	351-1%
▶ 180	403-3%
▶ 186	650-3%
▶ 192	550-5%

▶ 200	550 CRYSTAL
▶ 206	597-8%
▶ 212	314

7
MODELOS

56
COLORES

Todos nuestros distribuidores trabajan con tejidos, componentes y motores VERTILUX si alguien te ofrece un producto diferente al que deseas o un producto que no es VERTILUX repórtalo, la satisfacción de nuestros clientes es primero.




351-1%

POLYSCREEN-VISION


COLECCIÓN VISION POLYSCREEN

351-1%

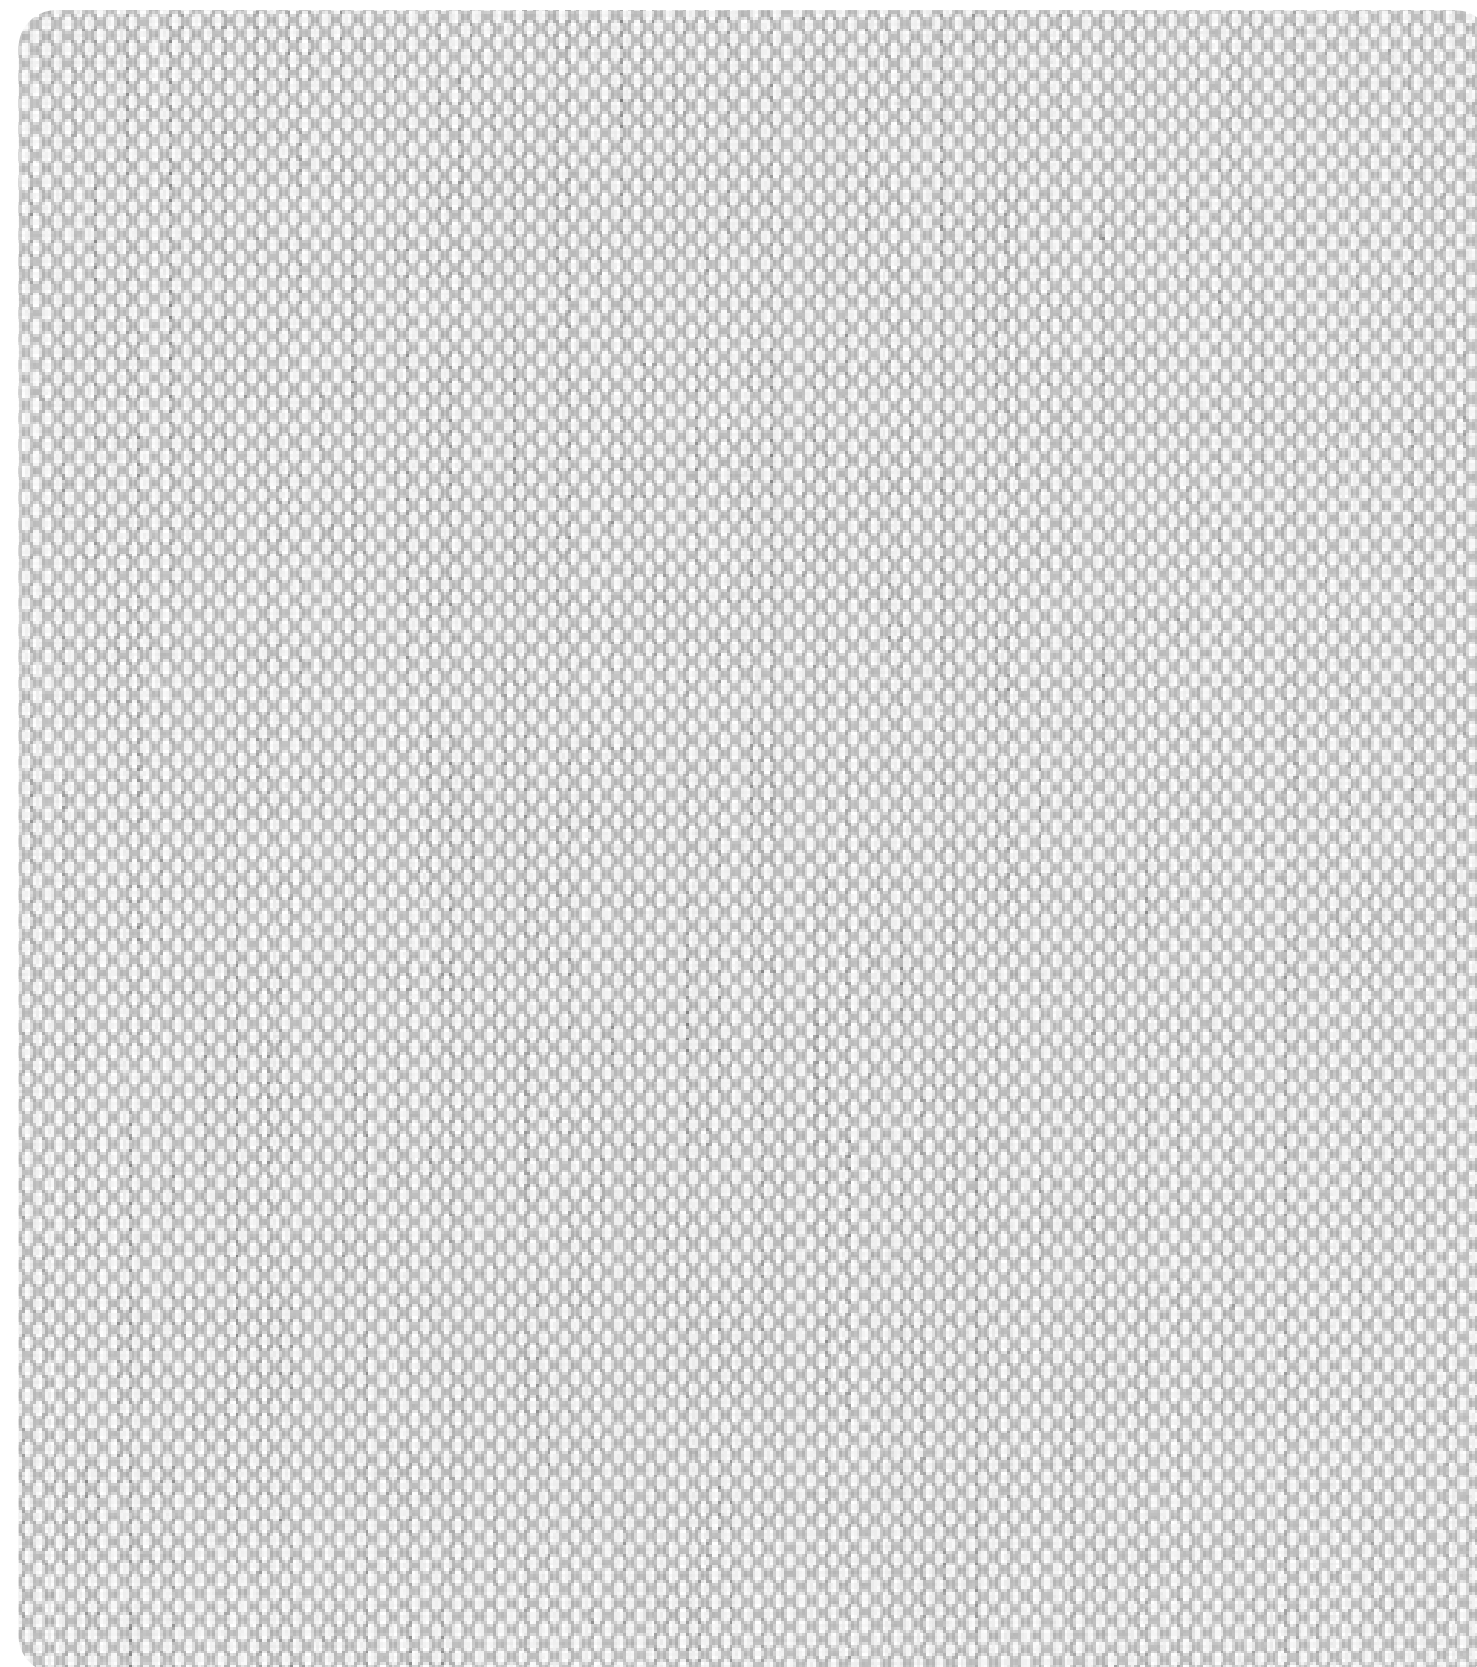


WHITE PEARL 0-004-15-02798


351-1%

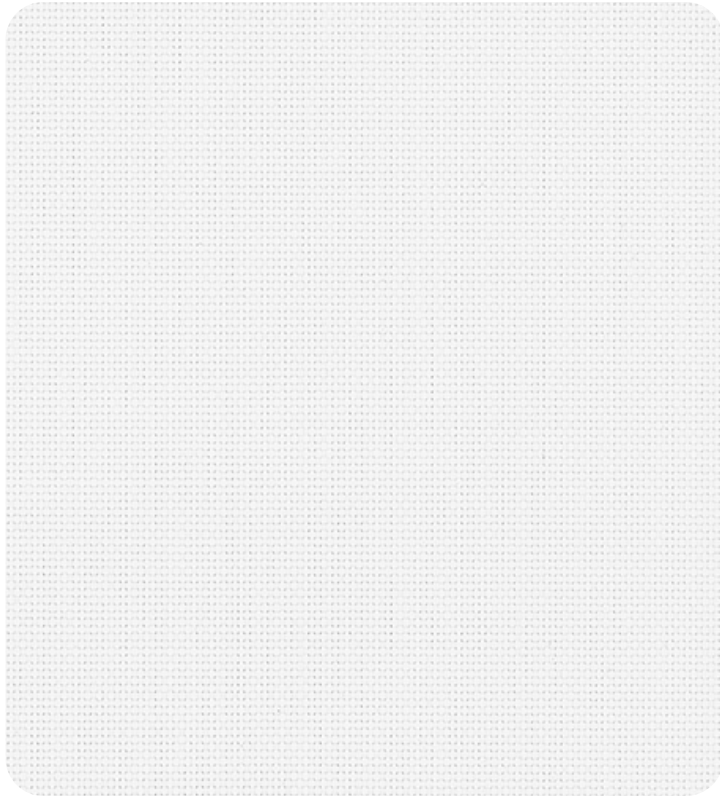


WHITE 0-004-15-00298

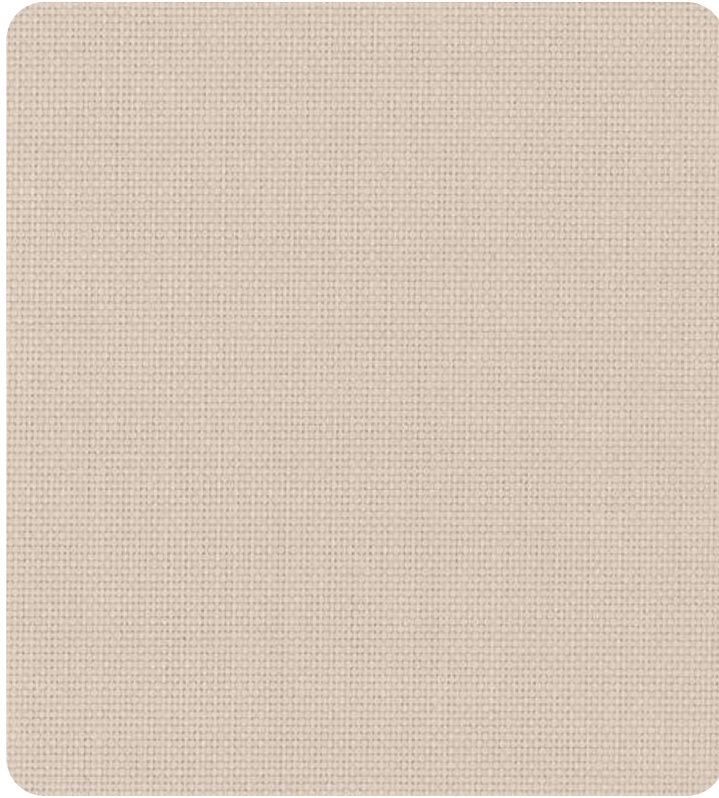

LINEN 0-004-15-00398

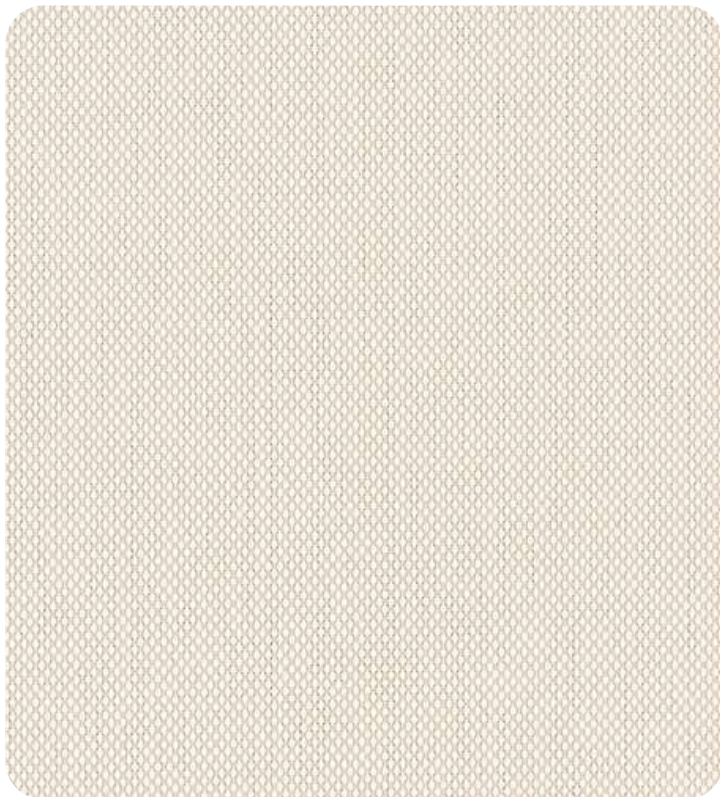


WHITE LINEN 0-004-15-22098

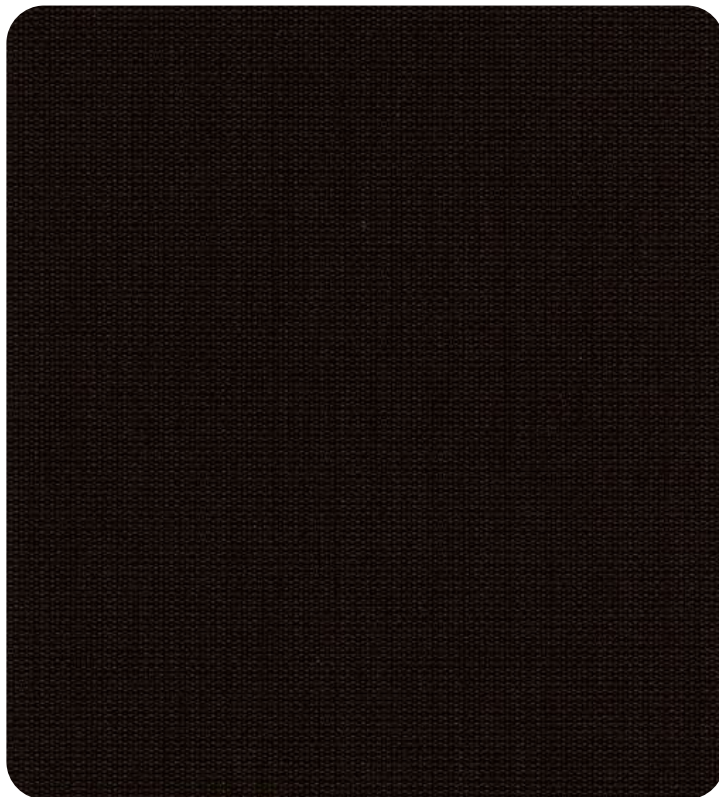

BRONZE 0-004-15-00698

351-1%

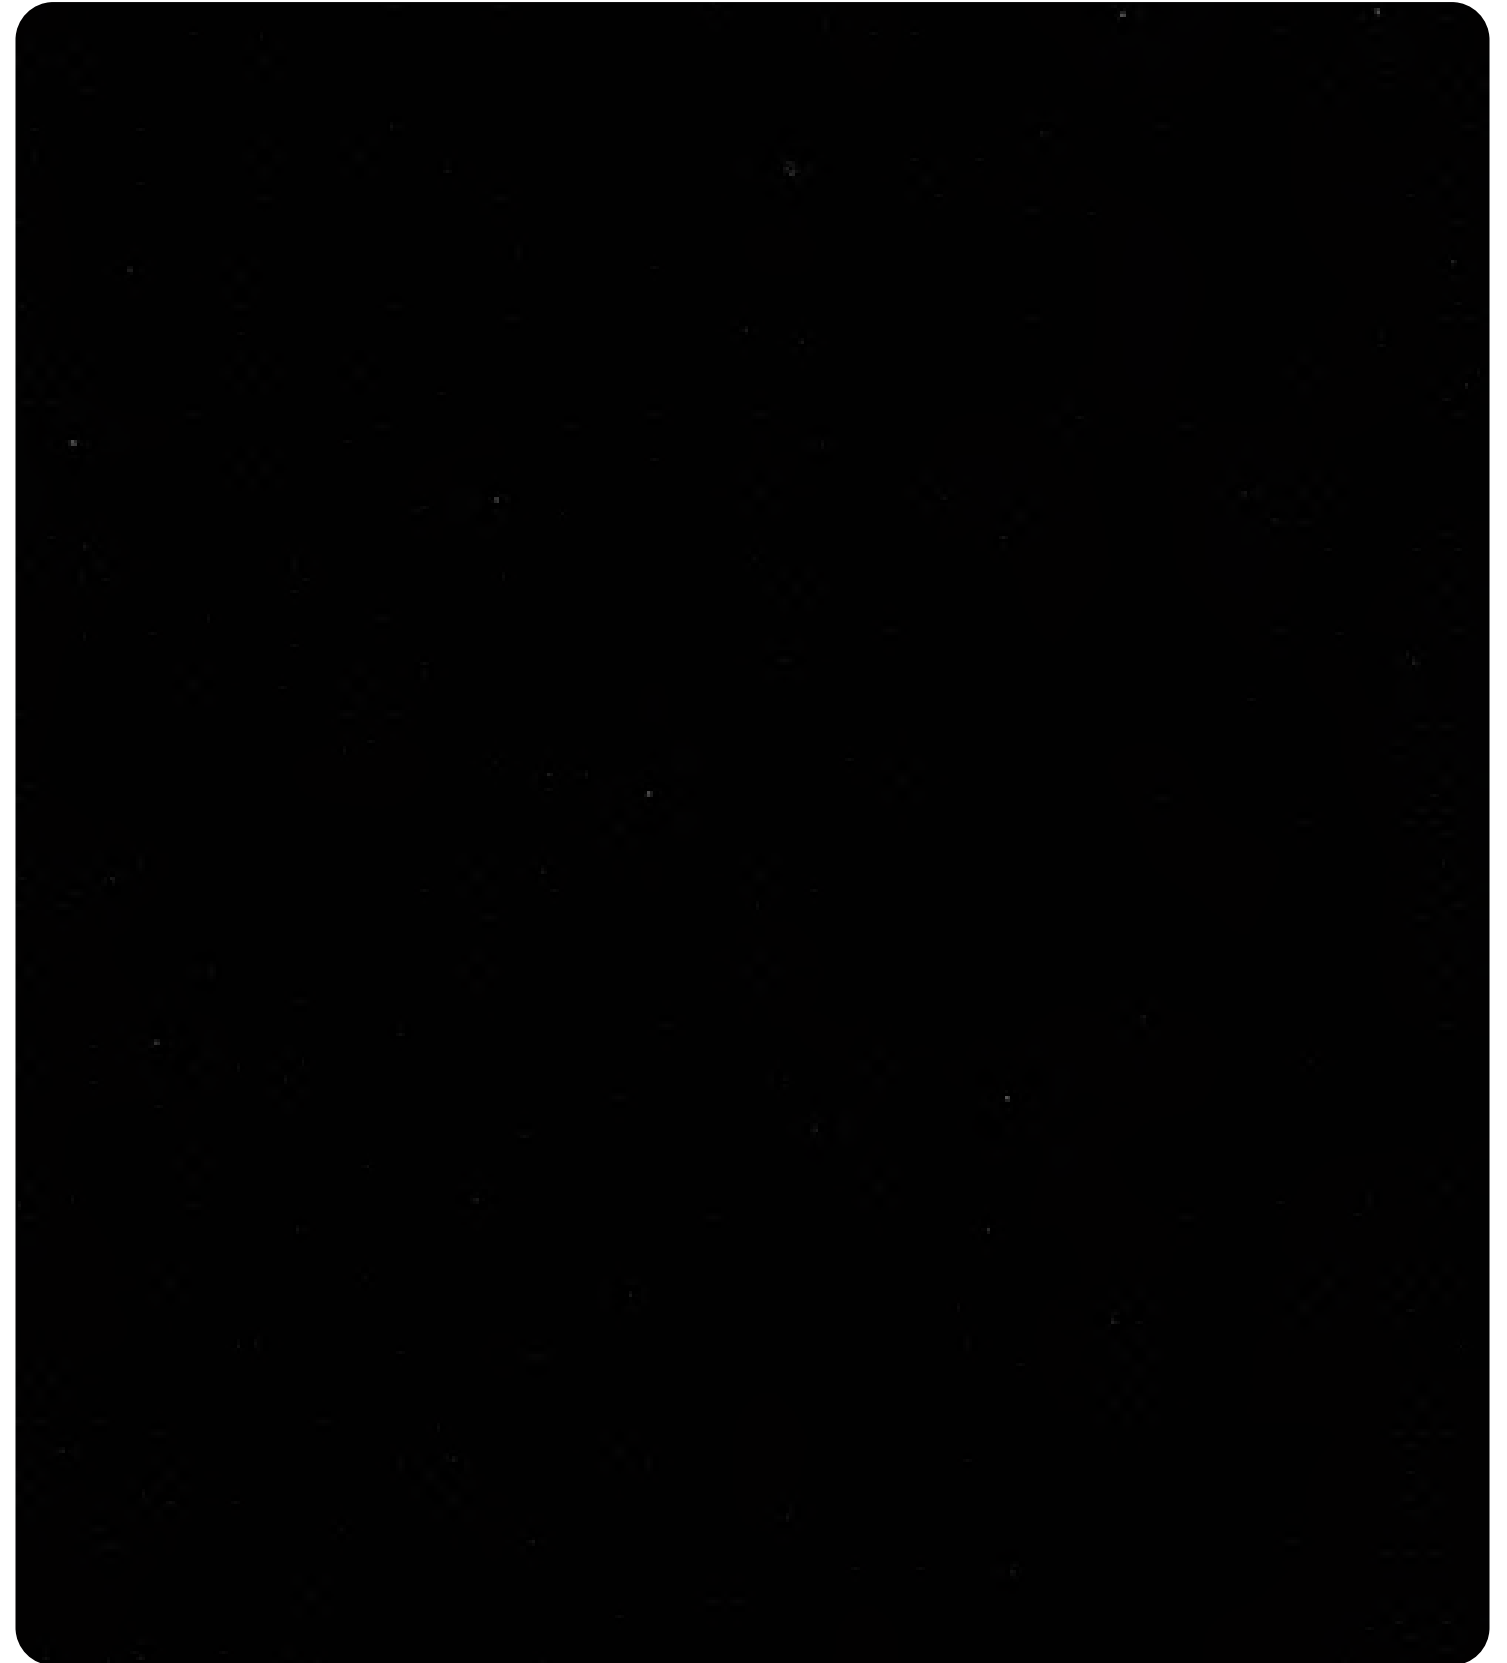

EBONY 0-004-15-01998

POLYSCREEN-VISION®
351-1%



TECHNICAL PROPERTIES

Composition	-	20% HT-PES + 80% PVC
Weight	UNE EN 12127	508 g/m² ± 5% 14.98 oz/yd² ± 5%
Yarn / cm	Int. Method	Warp: 22 Weft: 17
Yarn Diameter	Int. Method	0.3 mm 0.011 in
Roll Width	-	2.5 m 98.4 in
Openness Factor	-	~1%
UV Blockage	-	~99%
Thickness	UNE EN ISO 5084: 1997	0.65 mm ± 5% 0.025 in ± 5%
Light Fastness (Grey Scale Level)	UNE EN ISO 105 B06: 2002 (Interior)	5/5 4/5 White
	UNE EN ISO 105 B03: 1994 (Exterior)	5/5 4/5 White
	UNE EN ISO 105 B04: 1998 (Exterior)	5/5 4/5 White
	UNE EN ISO 4892-2 (Exterior)	5/5 4/5 White
	UNE EN ISO 105 B02: 2002 (Interior)	8/8 7/8 White
Light Fastness (Blue Scale Level)	UNE EN ISO 13937-3: 2001	Warp: 5.3 daN Weft: 3.3 daN
Tearing Resistance	UNE EN ISO 13934-1: 1999	Warp: 186.0 daN/5cm Weft: 145.0 daN/5cm
Breaking Strength	UNE EN ISO 13934-1: 1999	Warp: 28.0% Weft: 21.0%
Stretch	UNE EN ISO 112-017: 92	Without changes in surface
Corrosion in Saline Environment - Neutral Fog	ISO 9227: 90	Without changes in surface
Odor Test	PV-3900	3 Pass
Flame Retardant	EN 13773: 2003	Class 1
	EN 13501-1:2007	Bs2d0
	DIN 4102	B1
	NFPA 701	Pass
	CAN/ULC-S109-03	Pass
Wheelmark	IMO Res.MSC.307 [88]-[2010 FTP Code] and MSC/Circ.1102	Pass
Noise Reduction	EN ISO 10534:2	aw = 0.50
Microorganism Growth Inhibition	ASTM 2180-01 and ASTM G21-09	Yes
Recycled Content	-	2% Pre-Consumer

SUNLIGHT CONTROL PROPERTIES

OPENNESS FACTOR: 1%				g _{TOT} INTERNAL GLAZING C		g _{TOT} INTERNAL GLAZING D	
COLOR	Ts(%)	Rs(%)	As(%)	Gtot	Class	Gtot	Class
Bronze	04	08	88	0.49	1	0.27	2
Ebony	01	04	95	0.50	0	0.28	2
Linen	21	57	22	0.35	1	0.24	2
White	16	73	11	0.31	2	0.23	2
White Linen	17	66	17	0.33	2	0.23	2
White Pearl	13	60	27	0.34	2	0.24	2

OPTICAL PROPERTIES

GLARE CONTROL	NIGHT PRIVACY	VISUAL CONTACT	DAYLIGHT UTILISATION
Class	Class	Class	Class
3	2	2	1
3	2	2	0
1	2	1	2
1	2	1	2
1	2	1	2
1	2	1	2

Data measured according to EN 410:2011 and EN 14500:2008. Calculations of g_{tot} are according to EN 13363-1, with 10% frame area. Classification of thermal and visual characteristic according to EN 14501. Data of g_{tot} are given using standard Glazing C and D, though any other combination may be calculated under request. According to the EN 13363-1 standard, the classification of thermal and visual comfort performance is configured on a scale of 0 to 4, where 0 is the lowest score and 4 is the highest. The classification is calculated in combination with the type of glass, Type C: Double-Glazing [4 mm floating + 16 mm argon-filled chamber + 4 mm floating] or Type D: Reflective Double-Glazing [4 mm floating + 16 mm argon-filled chamber + 4 mm floating with a low emissivity layer]. A g_{tot} of 0.24 rejects a 76% of the solar energy received.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶



▶ THE ROLLUX BOOK




403-3%

POLYSCREEN-VISION


COLECCIÓN VISION POLYSCREEN

403-3%

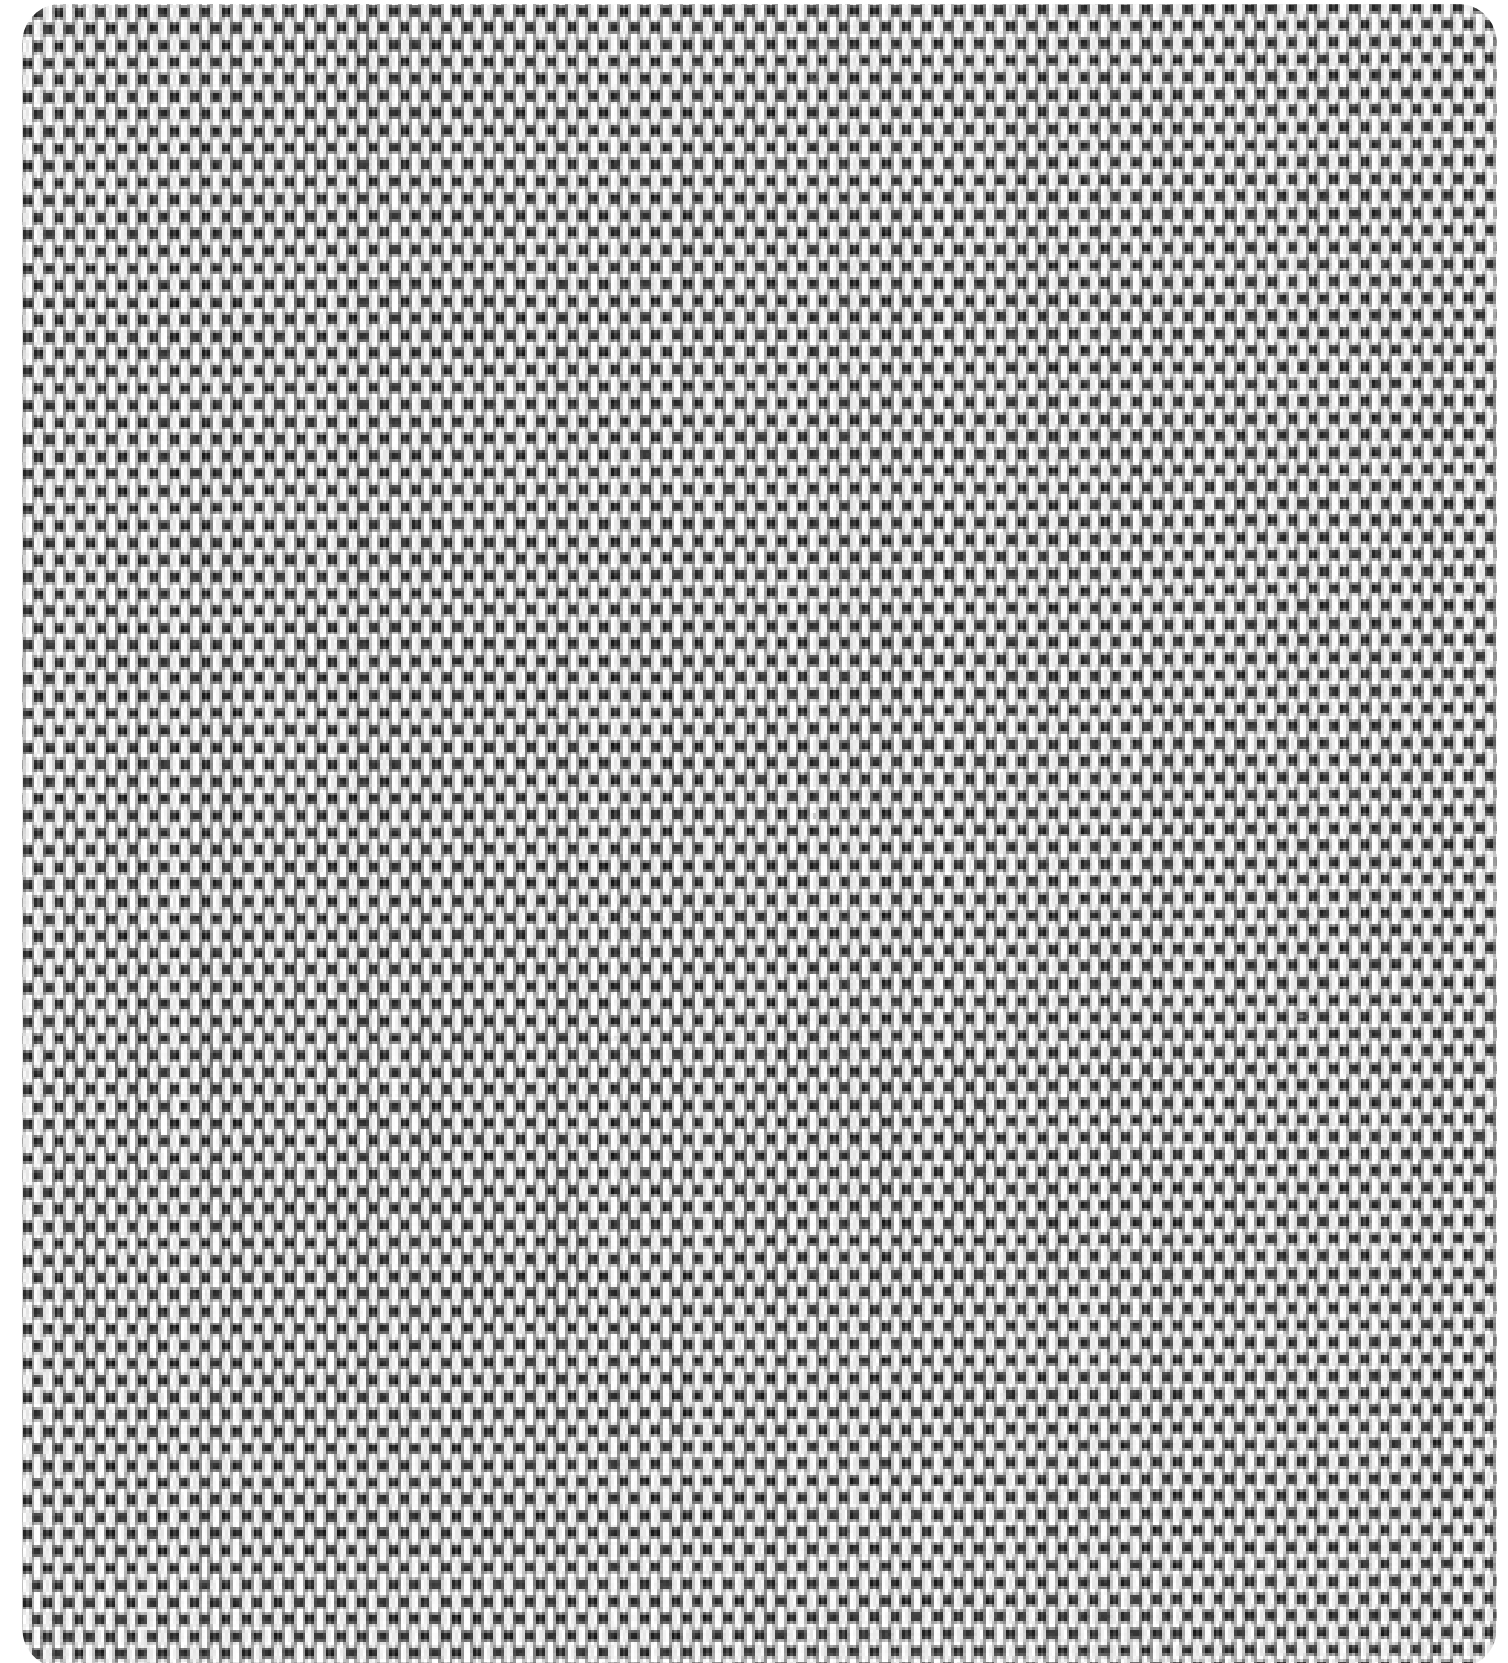


WHITE GREY 0-004-20-02198

403-3%

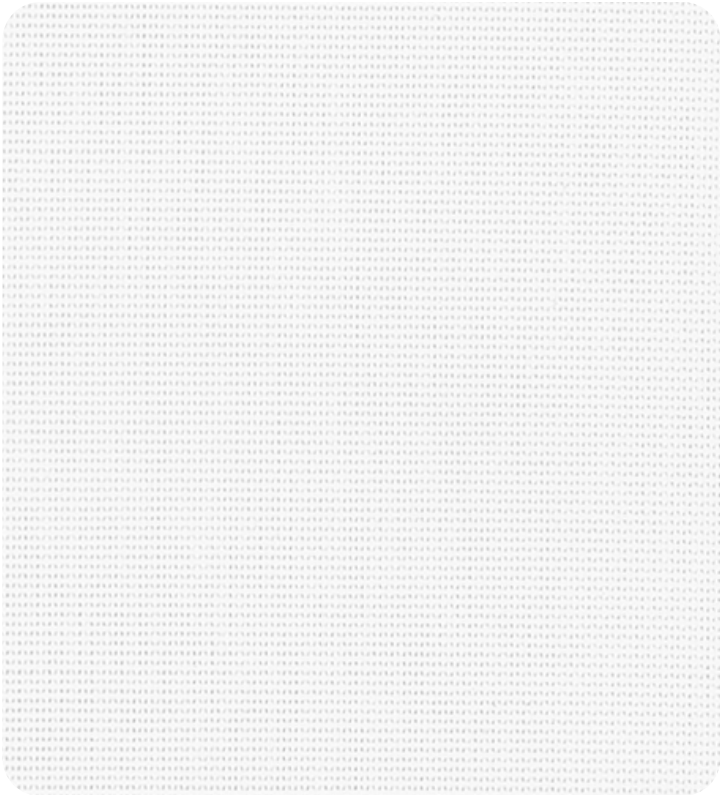


WHITE 0-004-20-00298

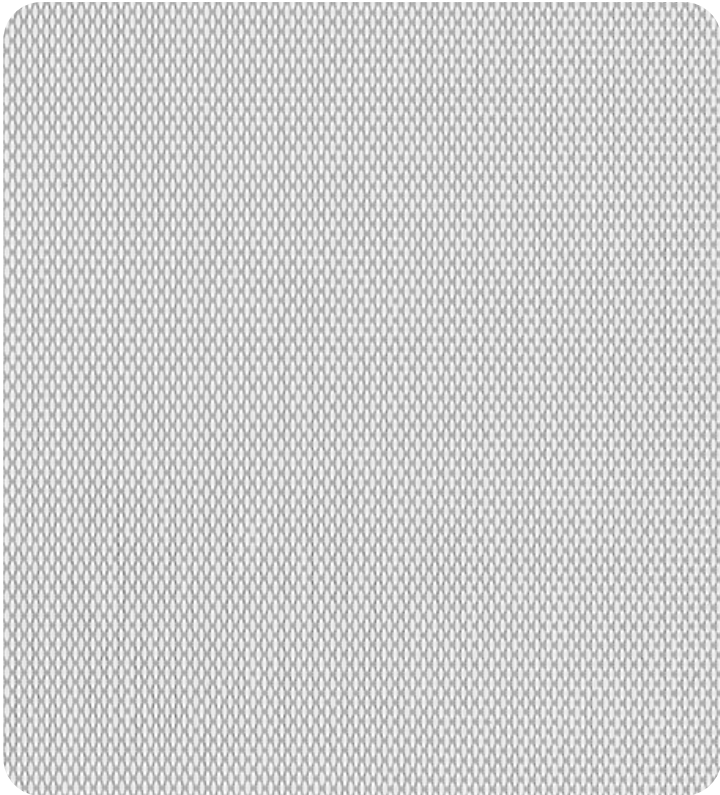

WHITE PEARL 0-004-20-02798




WHITE LINEN 0-004-20-22098

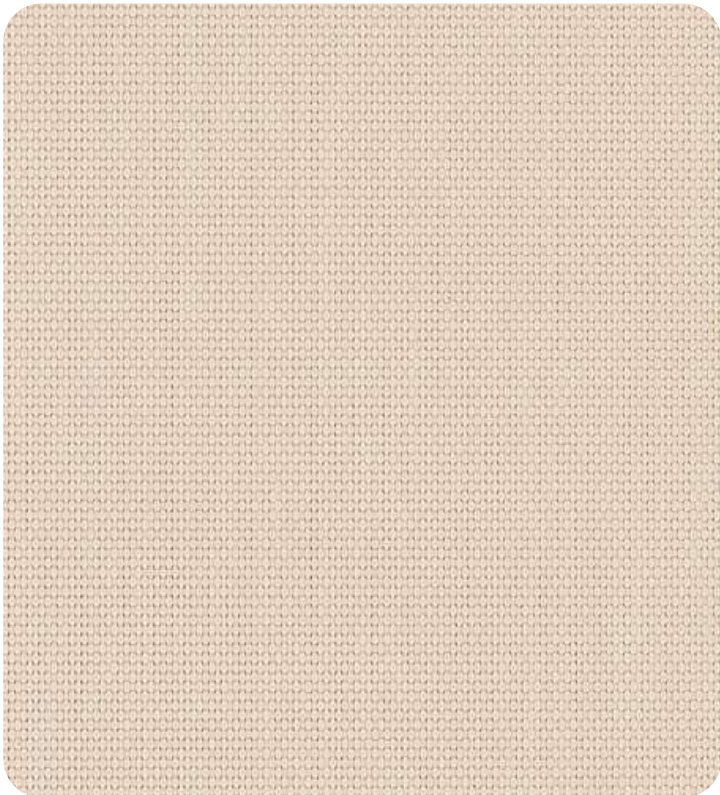

LINEN 0-004-20-00398


403-3%

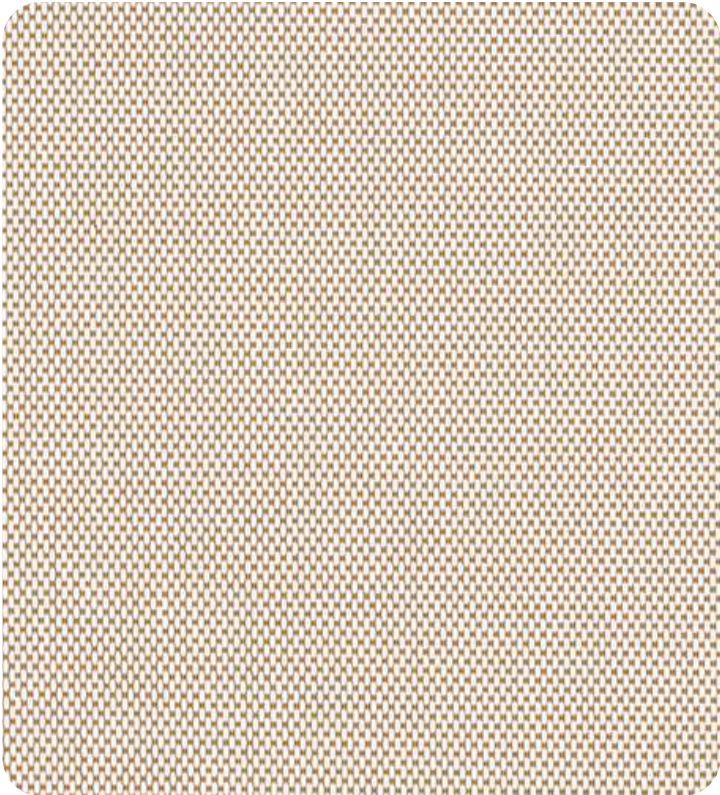

WHITE SAND 0-004-20-02498



EBONY BRONZE 0-004-20-00698

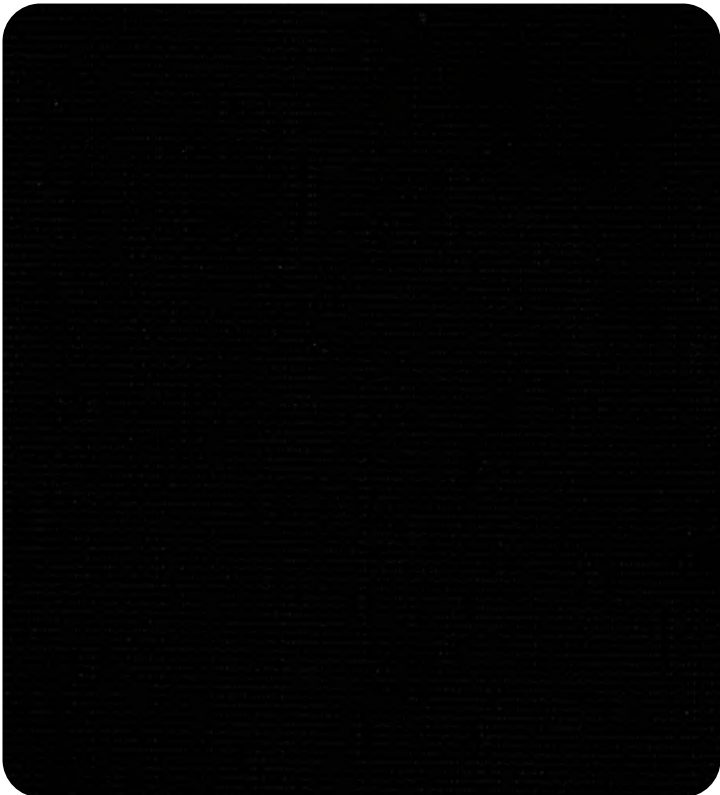

EBONY 0-004-20-01998

POLYSCREEN-VISION®

403-3%



TECHNICAL PROPERTIES

Composition	-	20% HT-PES + 80% PVC
Weight	UNE EN 12127	485 g/m² ± 5% 14.30 oz/yd² ± 5%
Yarn / cm	Int. Method	Warp: 22 Weft: 15
Yarn Diameter	Int. Method	0.3 mm 0.011 in
Roll Width	-	2.5 m 98.4 in
Openness Factor	-	~3%
UV Blockage	-	~97%
Thickness	UNE EN ISO 5084: 1997	0.65 mm ± 5% 0.025 in ± 5%
Light Fastness (Grey Scale Level)	UNE EN ISO 105 B06: 2002 (Interior)	5/5 4/5 White
	UNE EN ISO 105 B03: 1994 (Exterior)	5/5 4/5 White
	UNE EN ISO 105 B04: 1998 (Exterior)	5/5 4/5 White
	UNE EN ISO 4892-2 (Exterior)	5/5 4/5 White
	UNE EN ISO 105 B02: 2002 (Interior)	8/8 7/8 White
Light Fastness (Blue Scale Level)	UNE EN ISO 13937-3: 2001	Warp: 5.8 daN Weft: 4.5 daN
Tearing Resistance	UNE EN ISO 13934-1: 1999	Warp: 186.0 daN/5cm Weft: 122.0 daN/5cm
Breaking Strength	UNE EN ISO 13934-1: 1999	Warp: 23.5% Weft: 19.0%
Stretch	UNE EN ISO 112-017: 92	Without changes in surface
Corrosion in Saline Environment - Neutral Fog	ISO 9227: 90	Without changes in surface
Odor Test	PV-3900	3 Pass
Flame Retardant	DIN 4102	B1
	EN 13501-1:2007	Bs2d0
	EN 13773:2003	Class 1
	UNI 9177	Class 1
	NFPA 701	Pass
Wheelmark	CAN/ULC-S109-03	Pass
	IMO Res. MSC.307(88)-(2010 FTP Code) and MSC/Circ.1102	Pass
Microorganism Growth Inhibition	ASTM 2180-01 and ASTM G21-09	Yes
Recycled Content	-	2% Pre-Consumer

SUNLIGHT CONTROL PROPERTIES

OPENNESS FACTOR: 3%				g _{TOT} INTERNAL GLAZING C		g _{TOT} INTERNAL GLAZING D	
COLOR	Ts(%)	Rs(%)	As(%)	Gtot	Class	Gtot	Class
Ebony	03	04	93	0.50	0	0.28	2
Ebony Bronze	03	05	92	0.49	1	0.28	2
Linen	24	55	21	0.36	1	0.24	2
White	19	70	11	0.32	2	0.23	2
White Grey	11	45	44	0.38	1	0.25	2
White Linen	18	66	16	0.33	2	0.23	2
White Pearl	16	61	23	0.34	2	0.24	2
White Sand	15	56	29	0.35	1	0.24	2

Data measured according to EN 410:2011 and EN 14500:2008. Calculations of g_{tot} are according to EN 13363-1, with 10% frame area. Classification of thermal and visual characteristic according to EN 14501. Data of g_{tot} are given using standard Glazing C and D, though any other combination may be calculated under request. According to the EN 13363-1 standard, the classification of thermal and visual comfort performance is configured on a scale of 0 to 4, where 0 is the lowest score and 4 is the highest. The classification is calculated in combination with the type of glass, Type C: Double-Glazing [4 mm floating + 16 mm argon-filled chamber + 4 mm floating] or Type D: Reflective Double-Glazing [4 mm floating + 16 mm argon-filled chamber + 4 mm floating with a low emissivity layer]. A g_{tot} of 0.24 rejects a 76% of the solar energy received.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶

POLYSCREEN-VISION®

403-3%




CARE & MAINTENANCE



1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Hand wash with lukewarm water and a mild detergent solution.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

APPLICATIONS

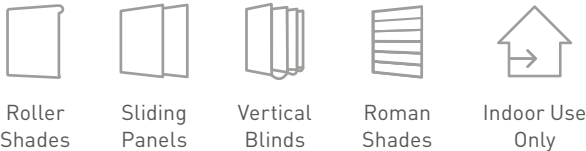

INTERNATIONAL CERTIFICATIONS



Polyscreen Vision® fabrics are covered by a 10-Year Warranty when installed indoors. Also, the Vertilux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.


MANUFACTURING



Can be Railroaded

Ultrasonic Cut NOT Required


OTHER BENEFITS



Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶

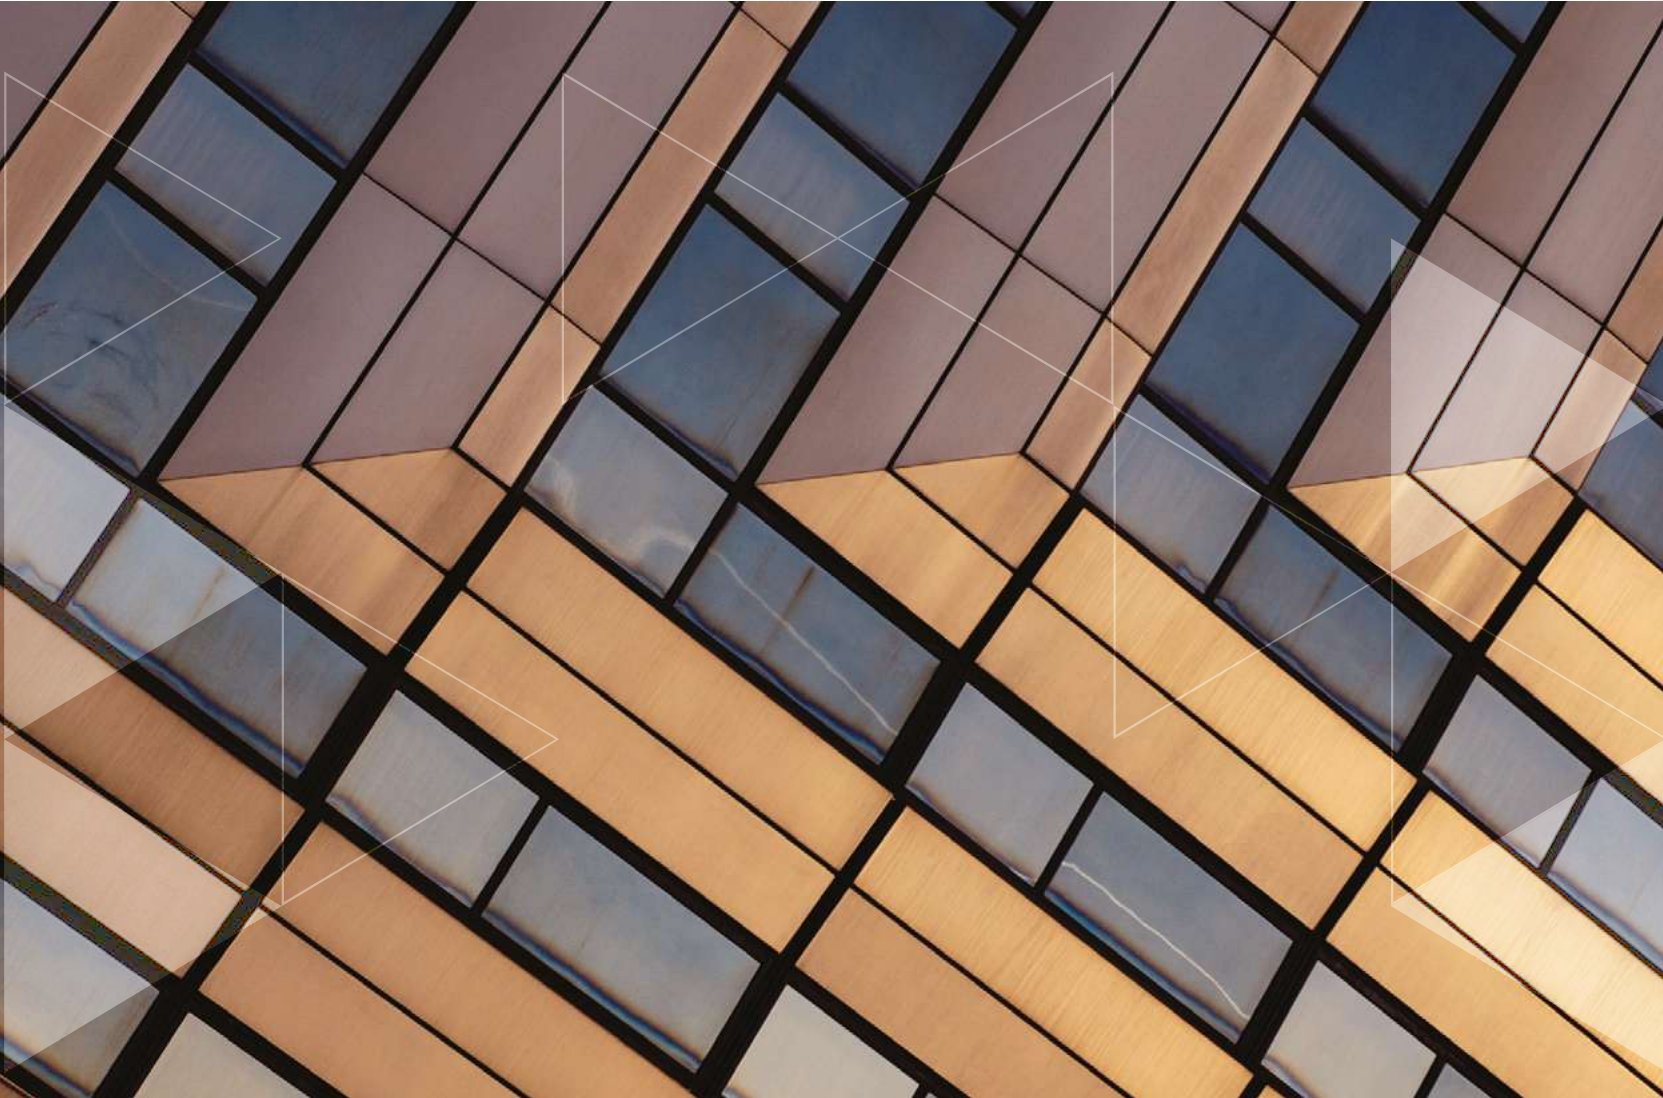


650-3%

POLYSCREEN-VISION


COLECCIÓN VISION POLYSCREEN

650-3%

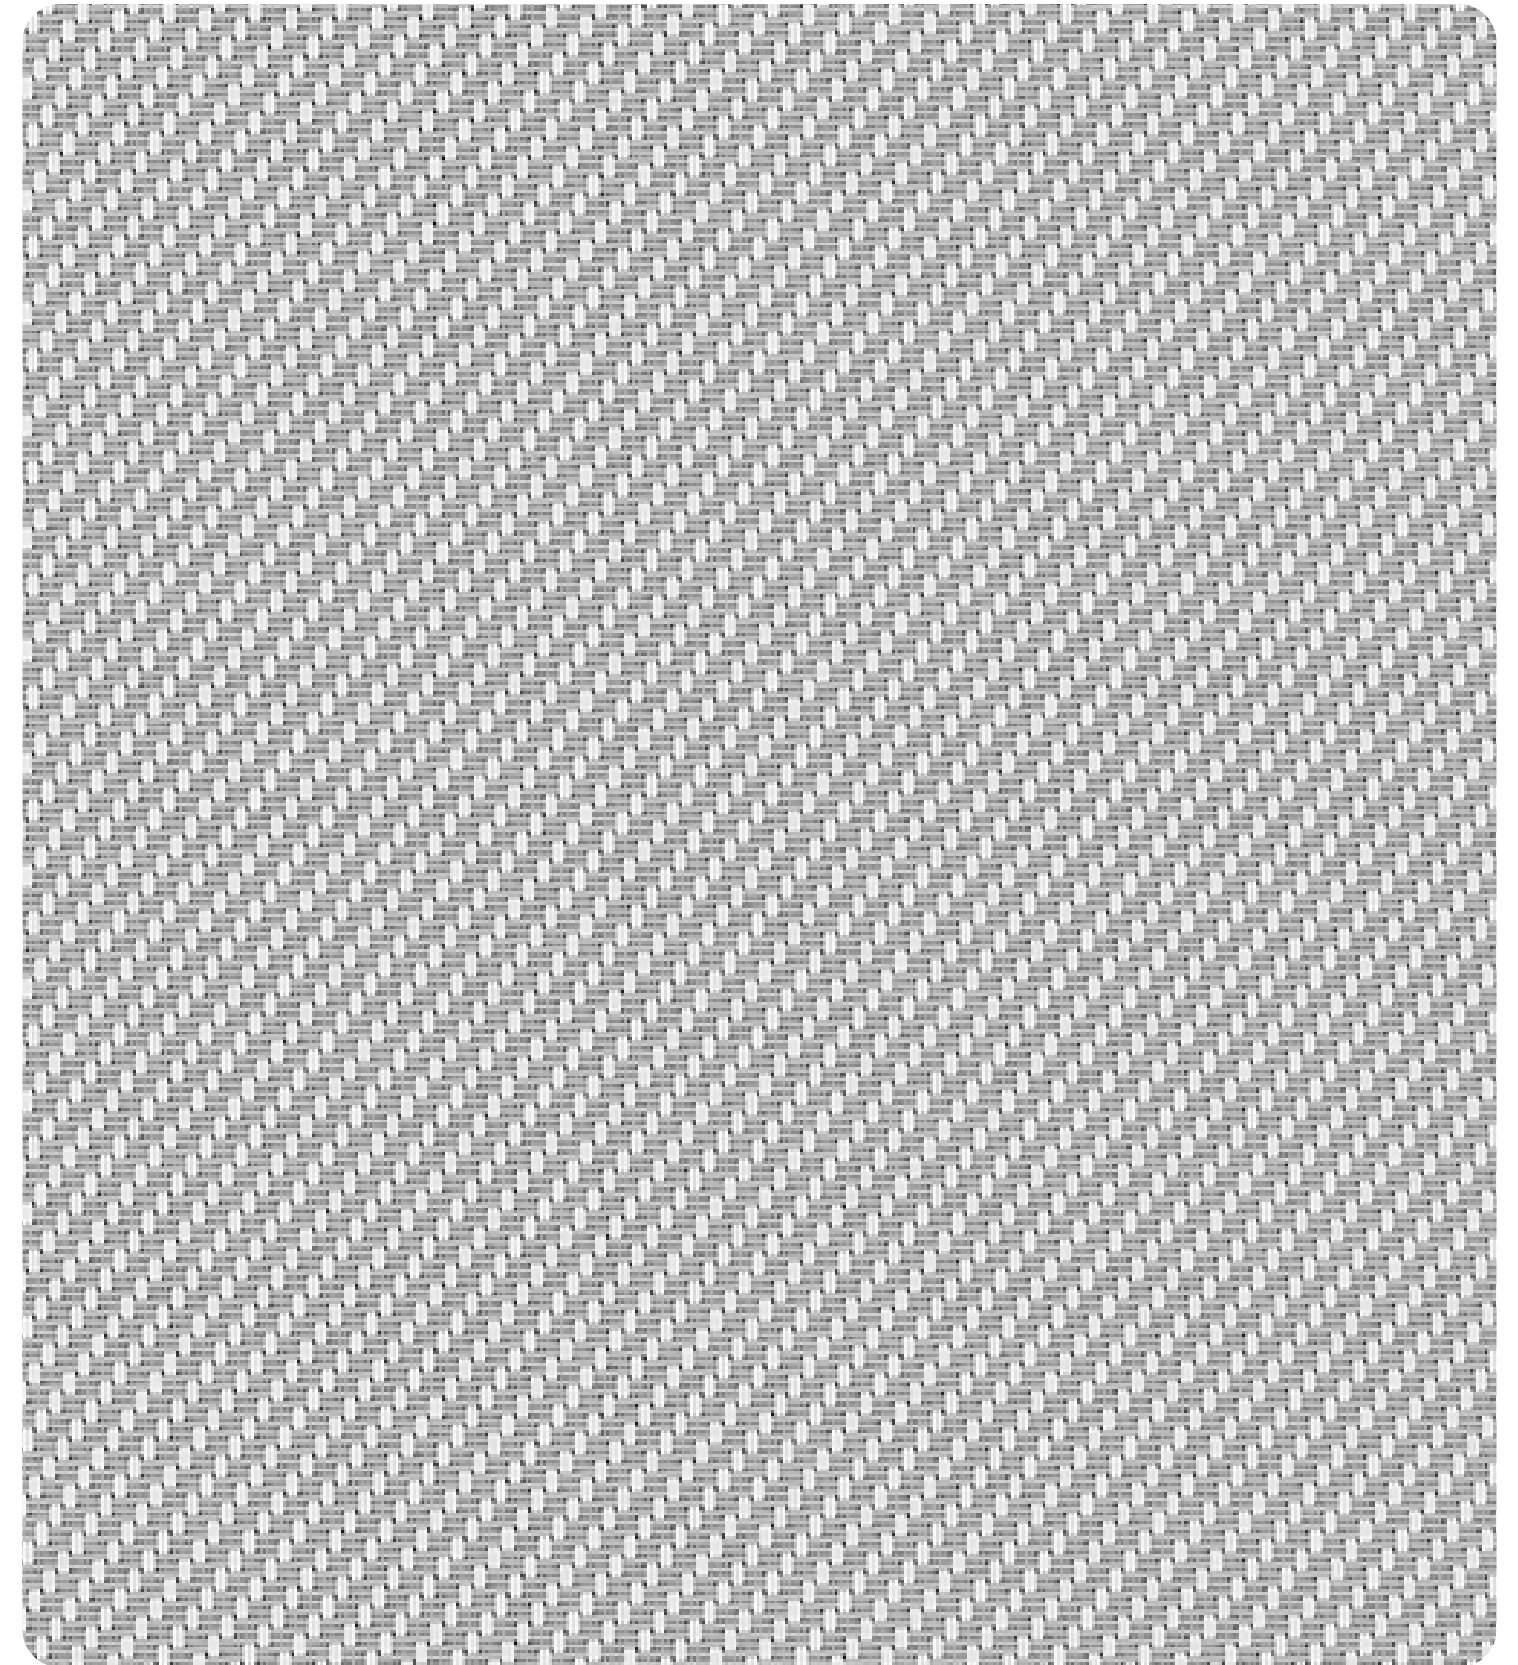

WHITE PEARL 0-004-12-02798


650-3%

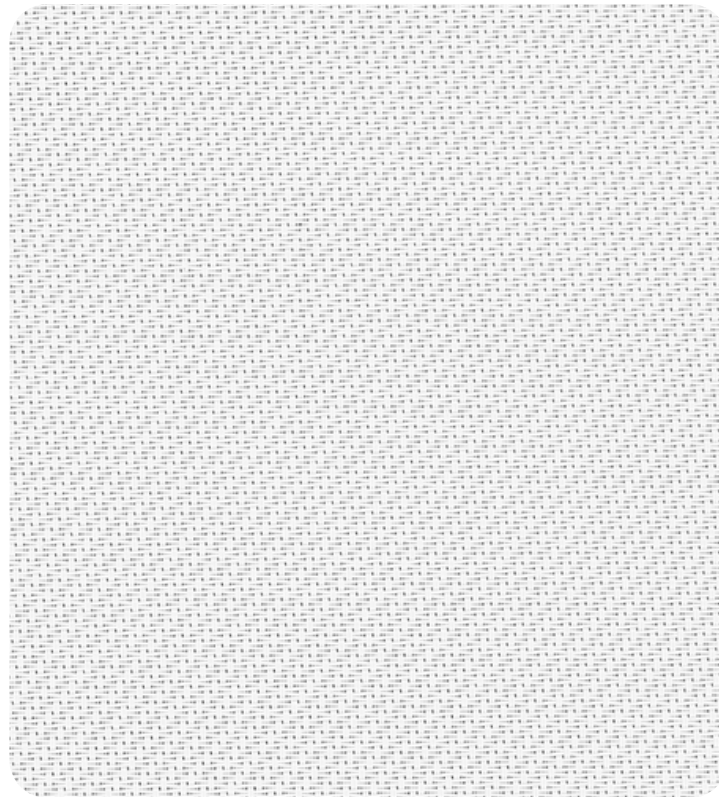

WHITE 0-004-12-00298



WHITE LINEN 0-004-12-22098

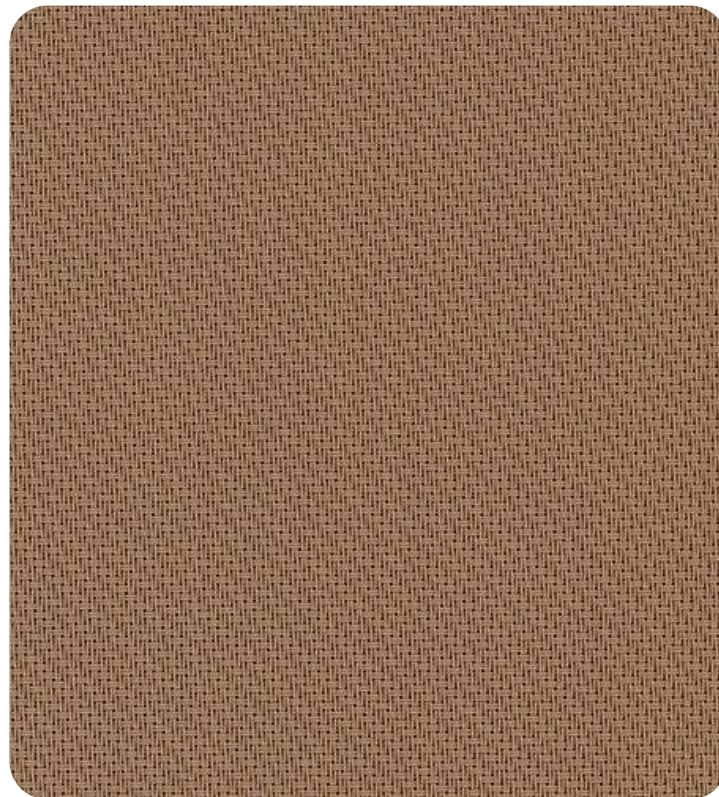


SAND 0-004-12-00498



LINEN 0-004-12-00398

650-3%

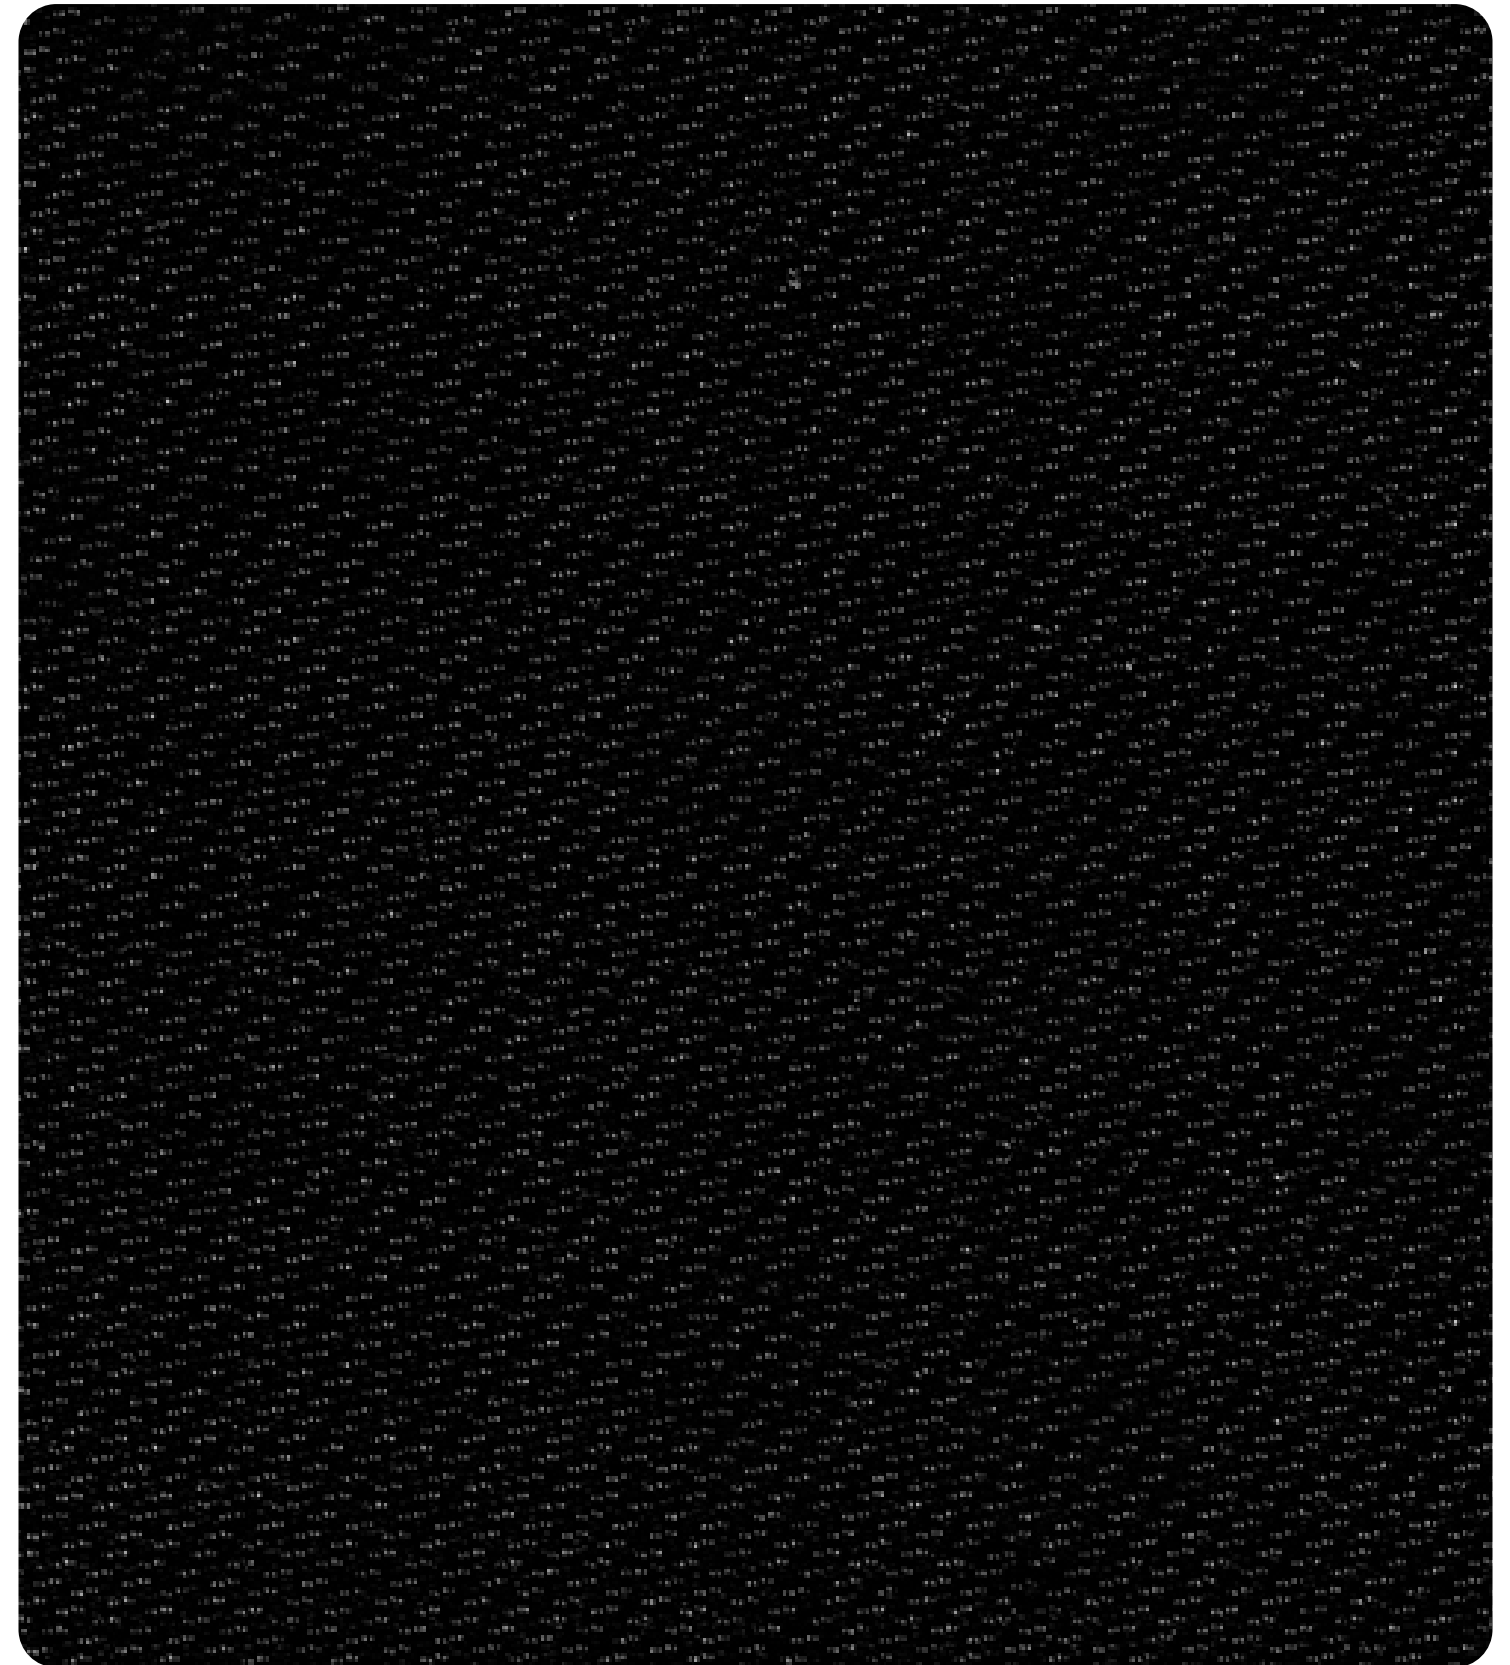

EBONY 0-004-12-01998

POLYSCREEN-VISION®
650-3%



TECHNICAL PROPERTIES

Composition	-	15% HT-PES + 85% PVC
Weight	UNE EN 12127	650 g/m² ± 5% 19.17 oz/yd² ± 5%
Yarn / cm	Int. Method	Warp: 16 Weft: 15
Yarn Diameter	Int. Method	0.4 mm 0.016 in
Roll Width	-	2.5 m 98.4 in
Openness Factor	ASHRAE Standard 74-1988	~3%
UV Blockage	-	~97%
Thickness	UNE EN ISO 5084: 1997	0.8 mm ± 5% 0.031 in ± 5%
Light Fastness (Grey Scale Level)	UNE EN ISO 105 B06: 2002 (Interior)	5/5 4/5 White
	UNE EN ISO 105 B03: 1994 (Exterior)	5/5 4/5 White
	UNE EN ISO 105 B04: 1998 (Exterior)	5/5 4/5 White
	UNE EN ISO 4892-2 (Exterior)	5/5 4/5 White
Light Fastness (Blue Scale Level)	UNE EN ISO 105 B02: 2002 (Interior)	8/8 7/8 White
	UNE EN ISO 13937-3: 2001	Warp: 8.2 daN Weft: 6.6 daN
Tearing Resistance	UNE EN ISO 13934-1: 1999	Warp: 174.0 daN/5cm Weft: 157.0 daN/5cm
Breaking Strength	UNE EN ISO 13934-1: 1999	Warp: 23.0% Weft: 21.0%
Stretch	UNE EN ISO 112-017: 92	Without changes in surface
Corrosion in Saline Environment - Neutral Fog	ISO 9227: 90	Without changes in surface
Odor Test	PV-3900	3 Pass
Flame Retardant	EN 13773: 2003	Class 1
	EN 13501-1:2007	Bs2d0
	DIN 4102	B1
	NFPA 701	Pass
Wheelmark	CAN/ULC-S109-03	Pass
	UNI 9177	Class 1
	IMO Res.MSC.307 (88)-(2010 FTP Code) and MSC/Circ.1102	Pass
	EN ISO 10534:2	aw = 0.35
Noise Reduction	ASTM 2180-01 and ASTM G21-09	Yes
Microorganism Growth Inhibition	-	2% Pre-Consumer
Recycled Content		

SUNLIGHT CONTROL PROPERTIES

OPENNESS FACTOR: 3%				g _{TOT} INTERNAL GLAZING C		g _{TOT} INTERNAL GLAZING D	
COLOR	Tv[%]	Rv[%]	Av[%]	Gtot	Class	Gtot	Class
Ebony	04	03	93	0.50	0	0.28	2
Linen	16	56	28	0.36	1	0.24	2
Sand	09	30	61	0.43	1	0.26	2
White	15	72	13	0.31	2	0.23	2
White Linen	15	66	19	0.33	2	0.23	2
White Pearl	12	59	29	0.35	1	0.24	2

Data measured according to internal methods. Classification of thermal and visual characteristics based on EN 14501.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

OPTICAL PROPERTIES

GLARE CONTROL	NIGHT PRIVACY	VISUAL CONTACT	DAYLIGHT UTILISATION
Class	Class	Class	Class
3	2	2	1
1	2	1	2
3	2	2	1
1	2	1	2
1	2	1	2
1	2	1	2

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶

POLYSCREEN-VISION®
650-3%




CARE & MAINTENANCE



1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Hand wash with lukewarm water and a mild detergent solution.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

APPLICATIONS

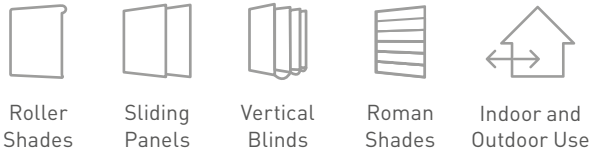


MANUFACTURING



Can be Railroaded
Ultrasonic Cut NOT Required

OTHER BENEFITS



INTERNATIONAL CERTIFICATIONS



Polyscreen Vision® fabrics are covered by a 10-Year Warranty when installed indoors and a 5-Year Warranty when installed outdoors. Also, the Vertilux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶




550-5%

POLYSCREEN-VISION


COLECCIÓN VISION POLYSCREEN

550-5%

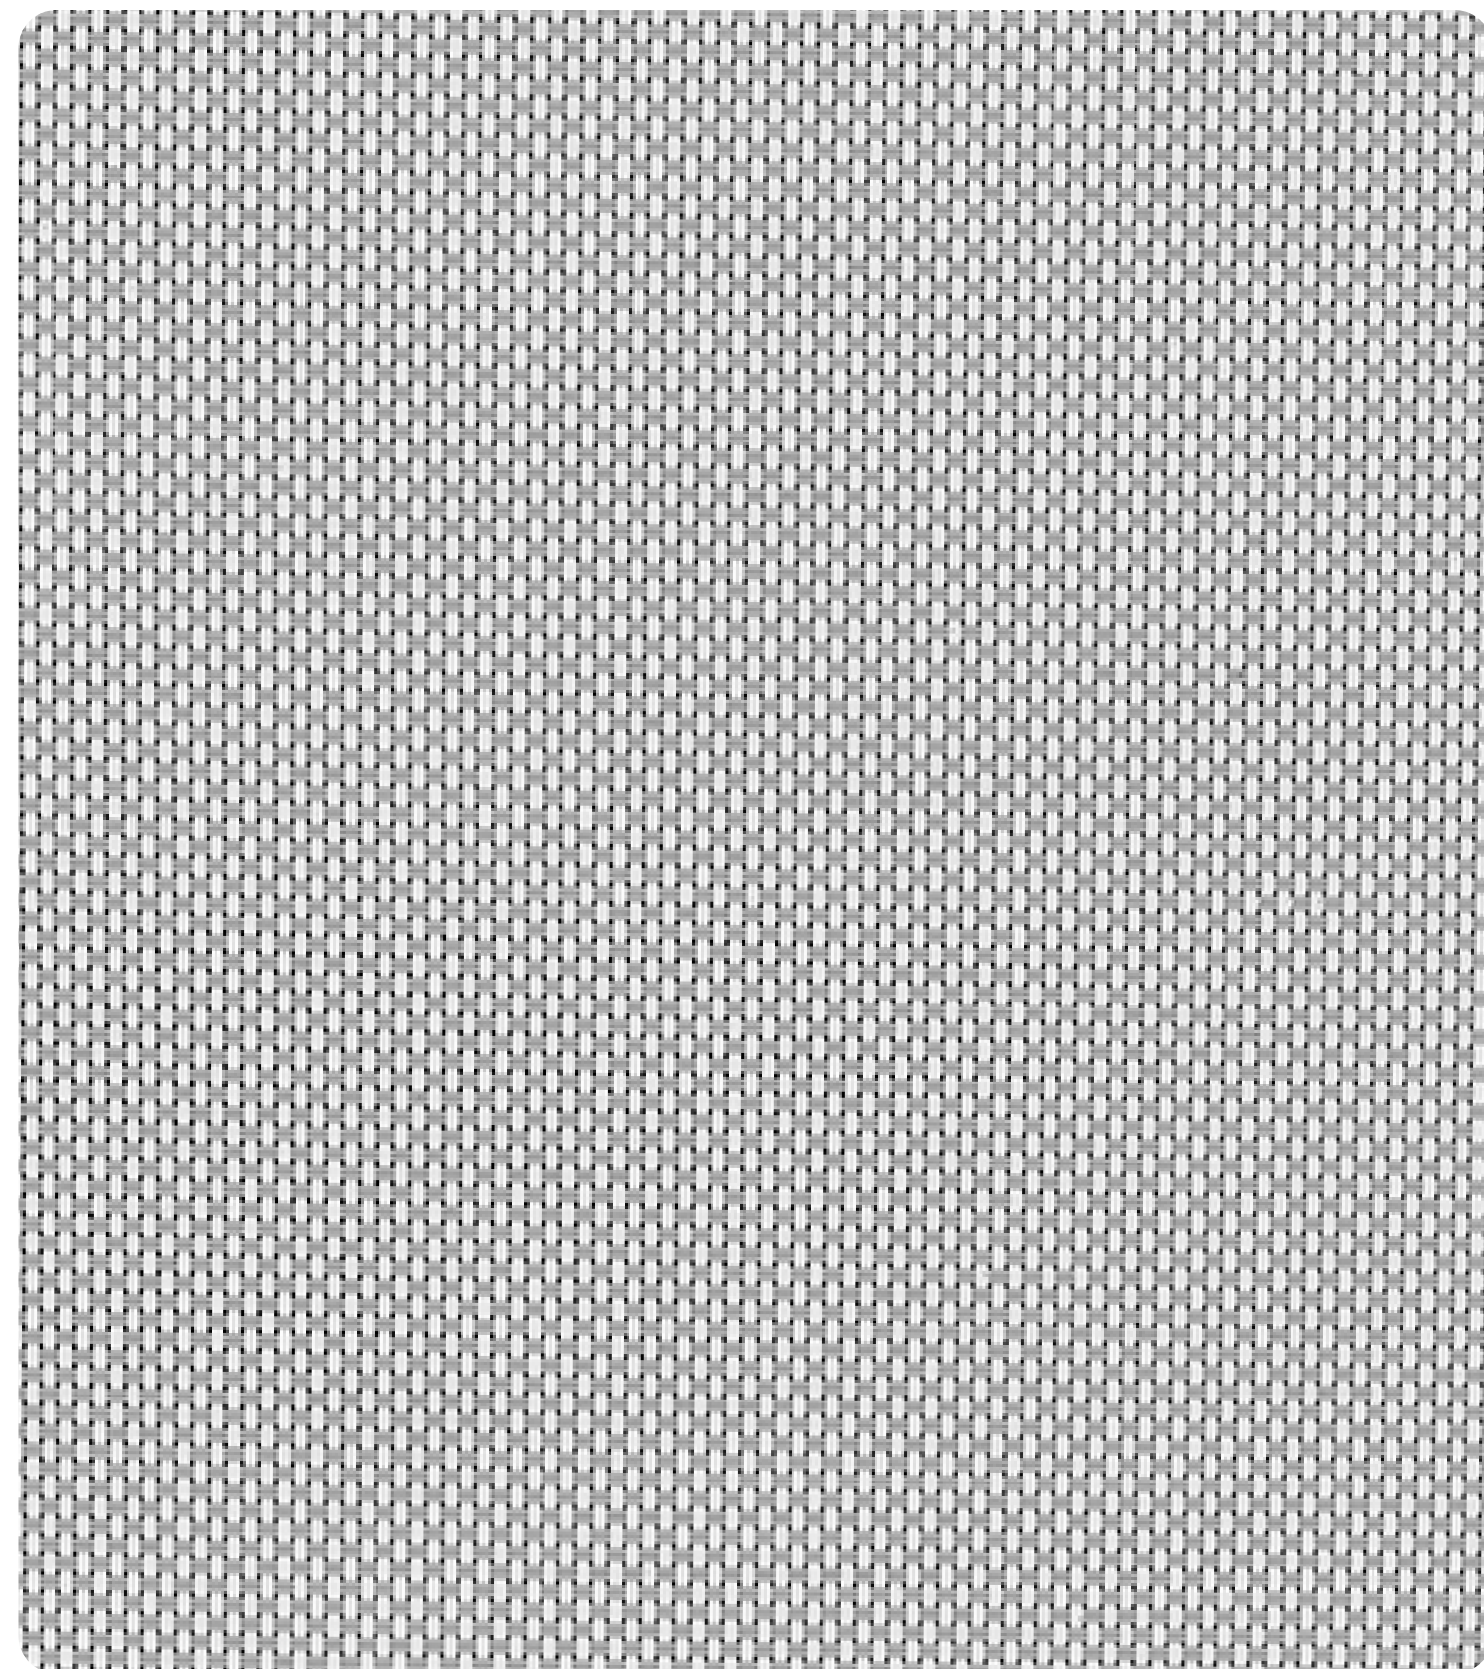


WHITE PEARL 0-004-10-02798


550-5%

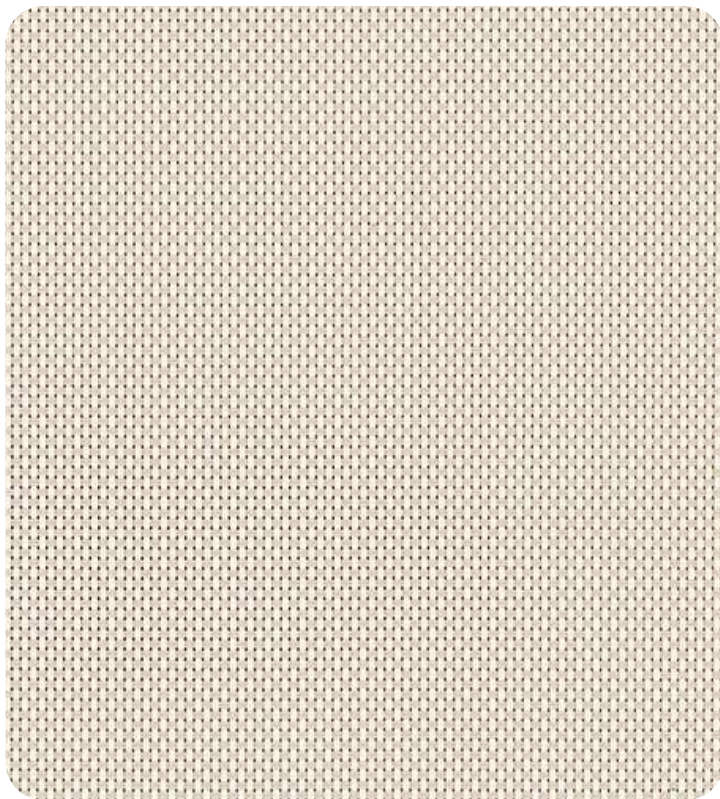


WHITE LINEN 0-004-10-22098

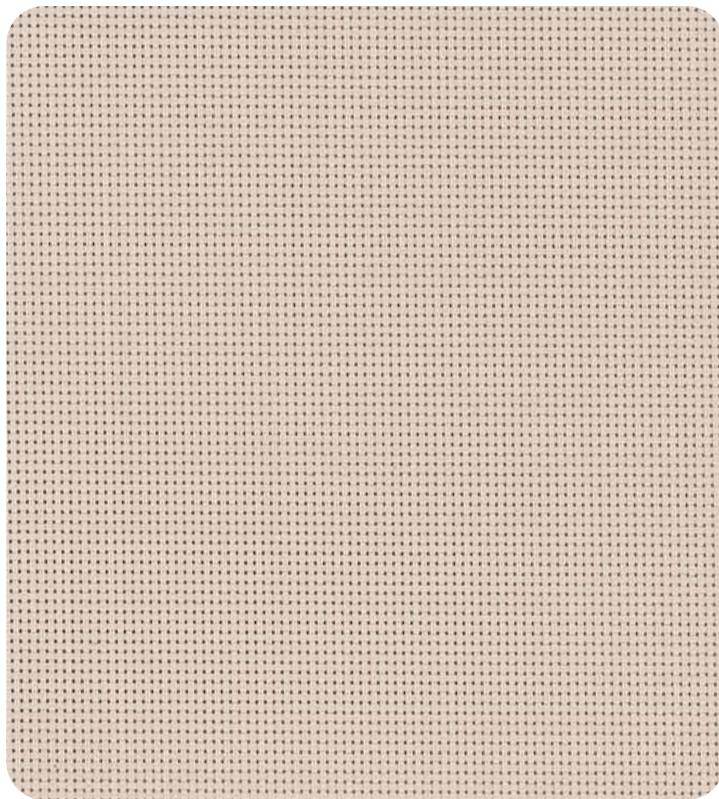

LINEN 0-004-10-00398

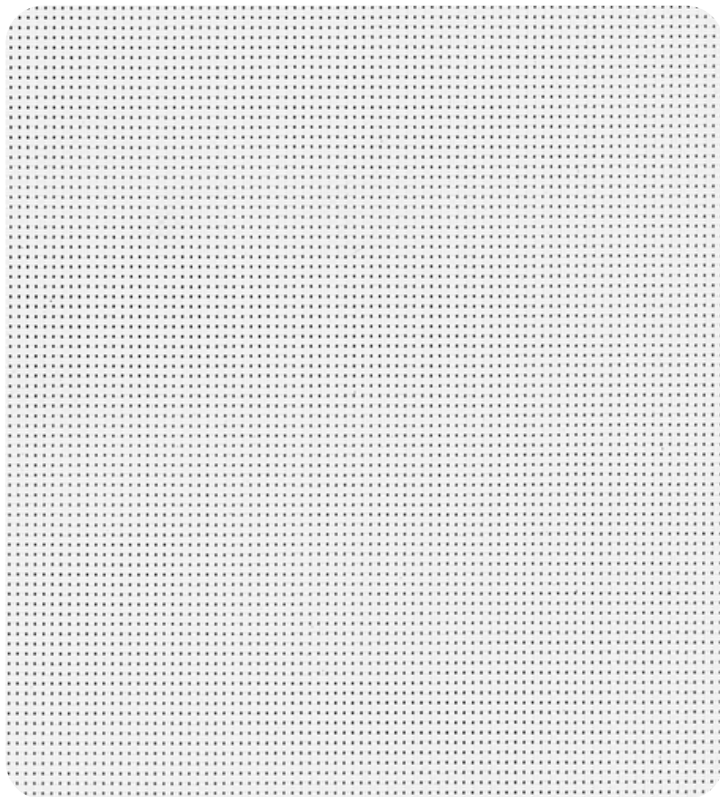


WHITE 0-004-10-00298

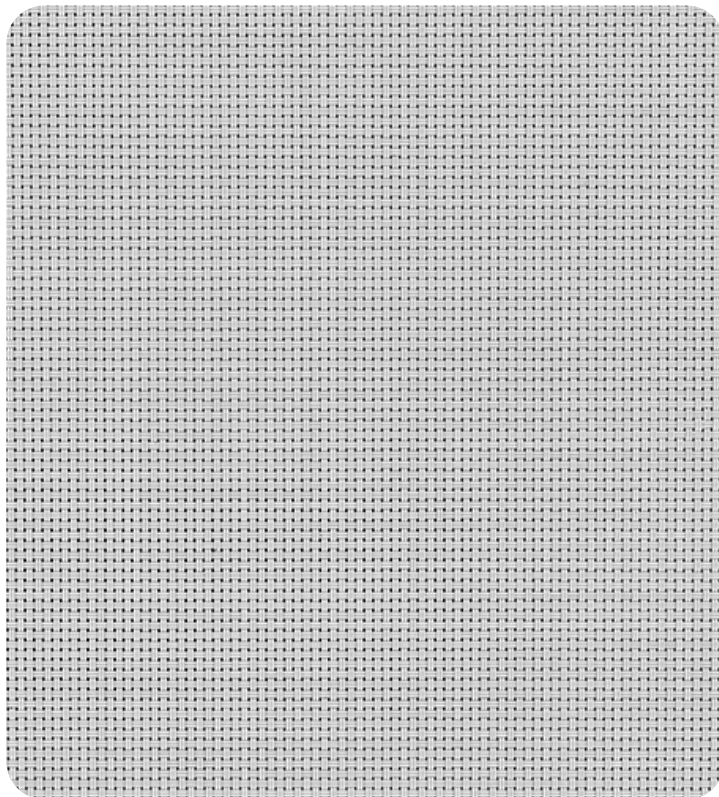


PEARL 0-004-10-00798


550-5%

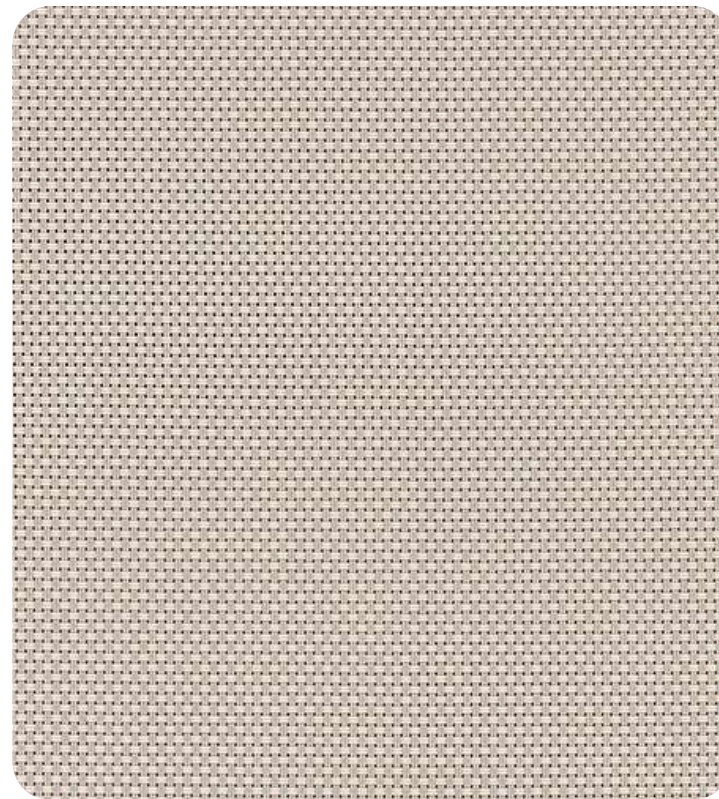


PEARL LINEN 0-004-10-72098

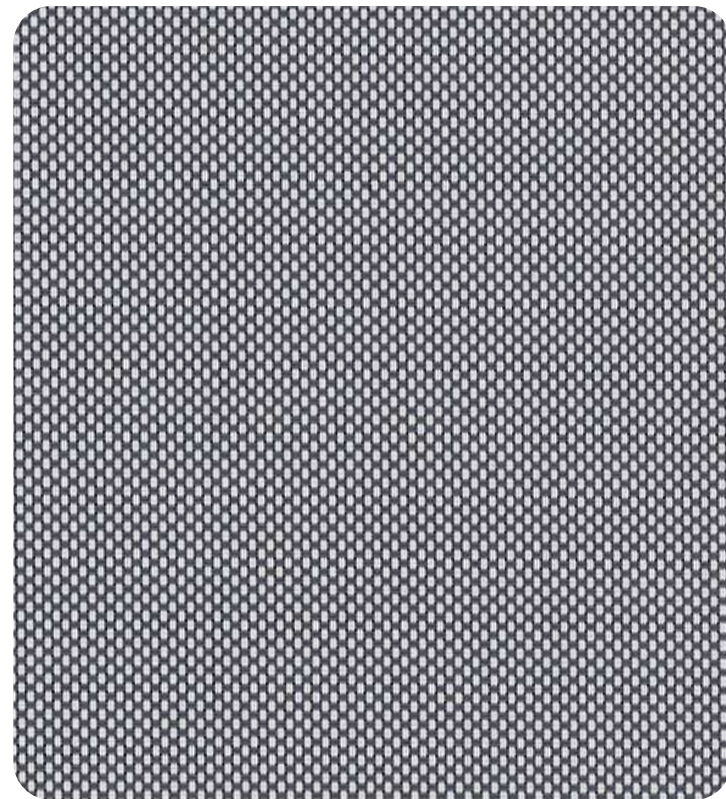

PEARL GREY 0-004-10-07198




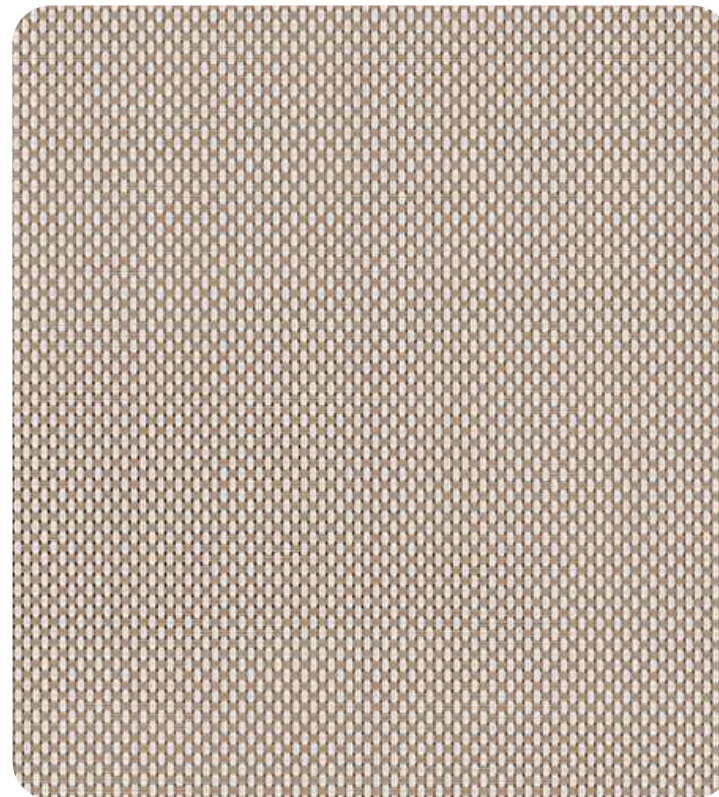


PEARL SAND 0-004-10-71098

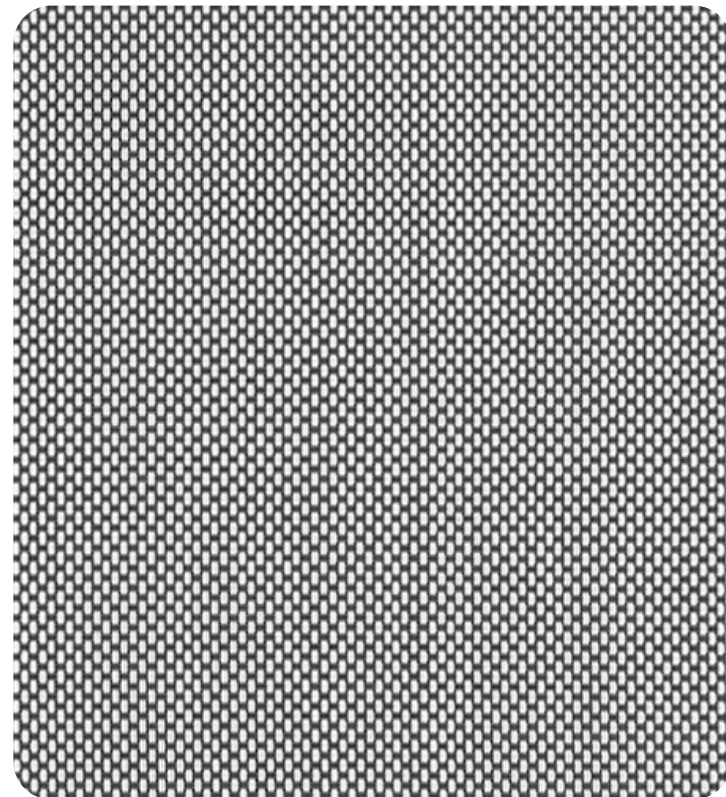

WHITE GREY 0-004-10-02198

550-5%

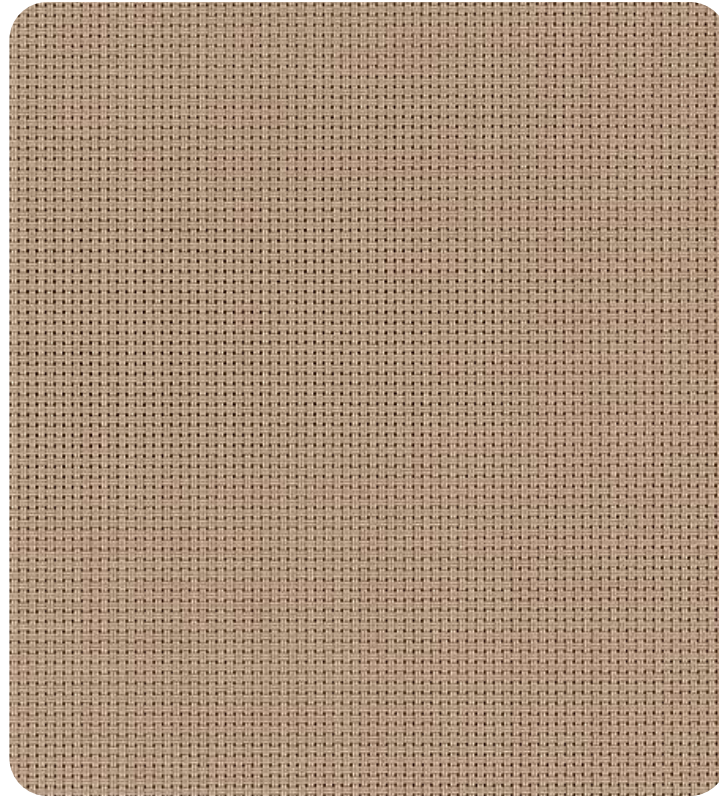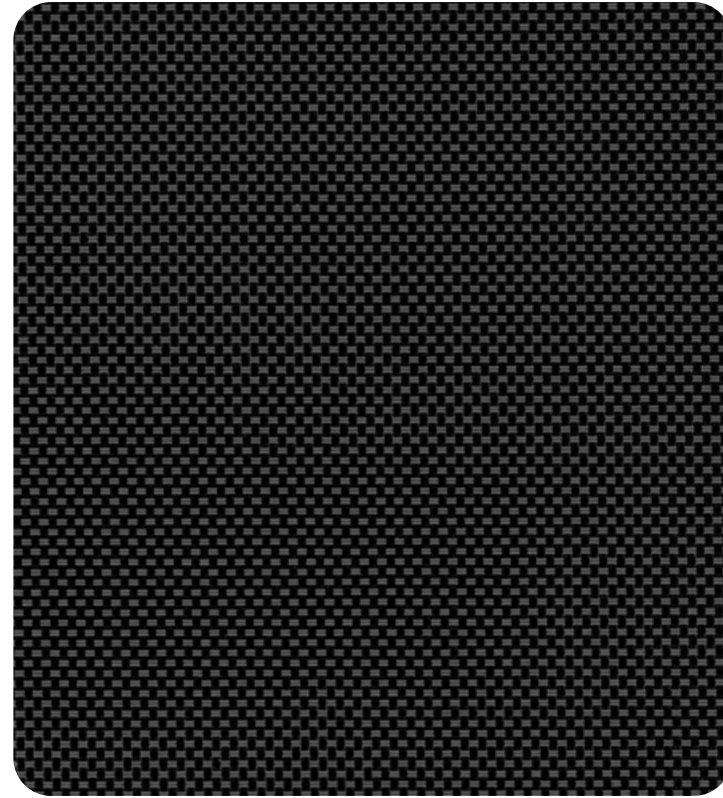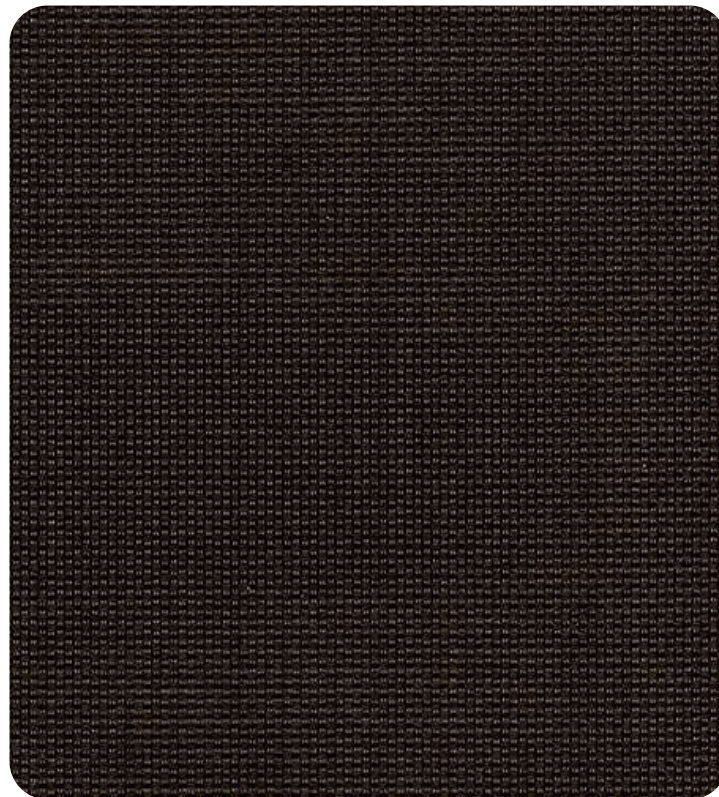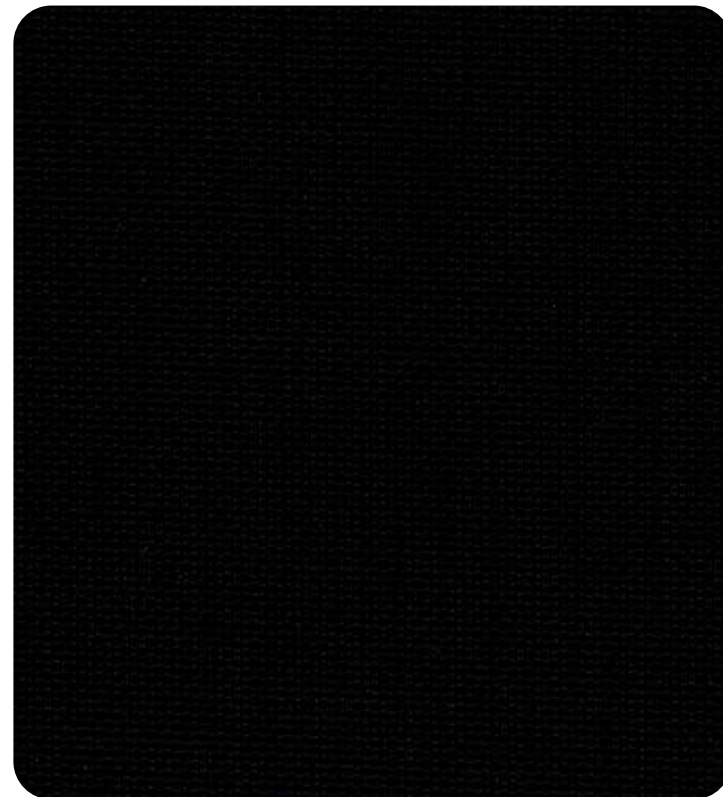**SAND** 0-004-10-00498**ASH** 0-004-10-01798**BRONZE** 0-004-10-00698**EBONY** 0-004-10-01998

550-5%

**TOBACCO** 0-004-10-01898

POLYSCREEN-VISION®
550-5%



TECHNICAL PROPERTIES

Composition	-	15% HT-PES + 85% PVC
Weight	UNE EN 12127	610 g/m² ± 5% 17.99 oz/yd² ± 5%
Yarn / cm	Int. Method	Warp: 16.0 Weft: 13.5
Yarn Diameter	Int. Method	0.4 mm 0.016 in
Roll Width	-	2.5 m 98.4 in
Openness Factor	ASHRAE Standard 74:1998	~5%
UV Blockage	Int. Method	~95%
Thickness	UNE EN ISO 5084: 1997	0.80 mm ± 5% 0.031 in ± 5%
Light Fastness (Grey Scale Level)	UNE EN ISO 105 B06: 2002 (Interior)	5/5 4/5 White
	UNE EN ISO 105 B03: 1994 (Exterior)	5/5 4/5 White
	UNE EN ISO 105 B04: 1998 (Exterior)	5/5 4/5 White
	UNE EN ISO 4892-2 (Exterior)	5/5 4/5 White
	UNE EN ISO 105 B02: 2002 (Interior)	8/8 7/8 White
Light Fastness (Blue Scale Level)	UNE EN ISO 13937-3: 2001	Warp: 6.6 daN Weft: 5.3 daN
Tearing Resistance	UNE EN ISO 13934-1: 1999	Warp: 174 daN/5cm Weft: 133 daN/5cm
Breaking Strength	UNE EN ISO 13934-1: 1999	Warp: 22% Weft: 21%
Stretch	UNE EN ISO 112-017: 92	Without changes in surface
Corrosion in Saline Environment - Neutral Fog	ISO 9227: 90	Without changes in surface
Odor Test	PV-3900	3 Pass
Flame Retardant	EN 13773: 2003	Class 1
	EN 13501-1:2007	Bs2d0
	DIN 4102	B1
	NFPA 701	Pass
	CAN/ULC-S109-03	Pass
Noise Reduction	UNI 9177	Class 1
Wheelmark	-	Yes
Microorganism Growth Inhibition	IMO Res. MSC.307(88)-(2010 FTP Code) and MSC/Circ.1102	Pass
Recycled Content	ASTM 2180-01 and ASTM G21-09	Yes
	-	2% Pre-Consumer

SUNLIGHT CONTROL PROPERTIES

OPENNESS FACTOR: 5%				g _{TOT} INTERNAL GLAZING C		g _{TOT} INTERNAL GLAZING D	
COLOR	Ts(%)	Rs(%)	As(%)	Gtot	Class	Gtot	Class
Ash	06	08	86	0.49	1	0.28	2
Bronze	07	07	86	0.49	1	0.28	2
Ebony	07	03	90	0.50	0	0.28	2
Linen	17	61	22	0.36	1	0.24	2
Pearl	10	46	44	0.39	1	0.25	2
Pearl Grey	09	33	58	0.43	1	0.26	2
Pearl Linen	12	51	37	0.38	1	0.25	2
Pearl Sand	10	40	50	0.41	1	0.25	2
Sand	07	29	64	0.42	1	0.26	2
Tobacco	07	05	88	0.50	1	0.28	2
White	15	78	07	0.32	2	0.23	2
White Linen	16	71	13	0.34	2	0.24	2
White Pearl	12	64	24	0.35	1	0.24	2

Data measured according to EN 410:2011 and EN 14500:2008. Calculations of gtot are according to EN 13363-1, with 10% frame area. Classification of thermal and visual characteristic according to EN 14501. Data of gtot are given using standard Glazing C and D, though any other combination may be calculated under request. According to the EN 13363-1 standard, the classification of thermal and visual comfort performance is configured on a scale of 0 to 4, where 0 is the lowest score and 4 is the highest. The classification is calculated in combination with the type of glass, Type C: Double-Glazing [4 mm floating + 16 mm argon-filled chamber + 4 mm floating] or Type D: Reflective Double-Glazing [4 mm floating + 16 mm argon-filled chamber + 4 mm floating with a low emissivity layer]. A gtot of 0.24 rejects a 76% of the solar energy received.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶

POLYSCREEN-VISION®
550-5%




CARE & MAINTENANCE



1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Hand wash with lukewarm water and a mild detergent solution.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

APPLICATIONS

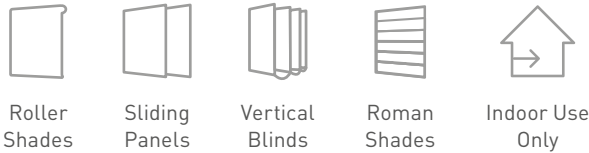

INTERNATIONAL CERTIFICATIONS



Polyscreen Vision® fabrics are covered by a 10-Year Warranty when installed indoors. Also, the Vertilux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶




550 CRYSTAL

GLEAMOROUS


COLECCIÓN VISION POLYSCREEN

550 CRYSTAL

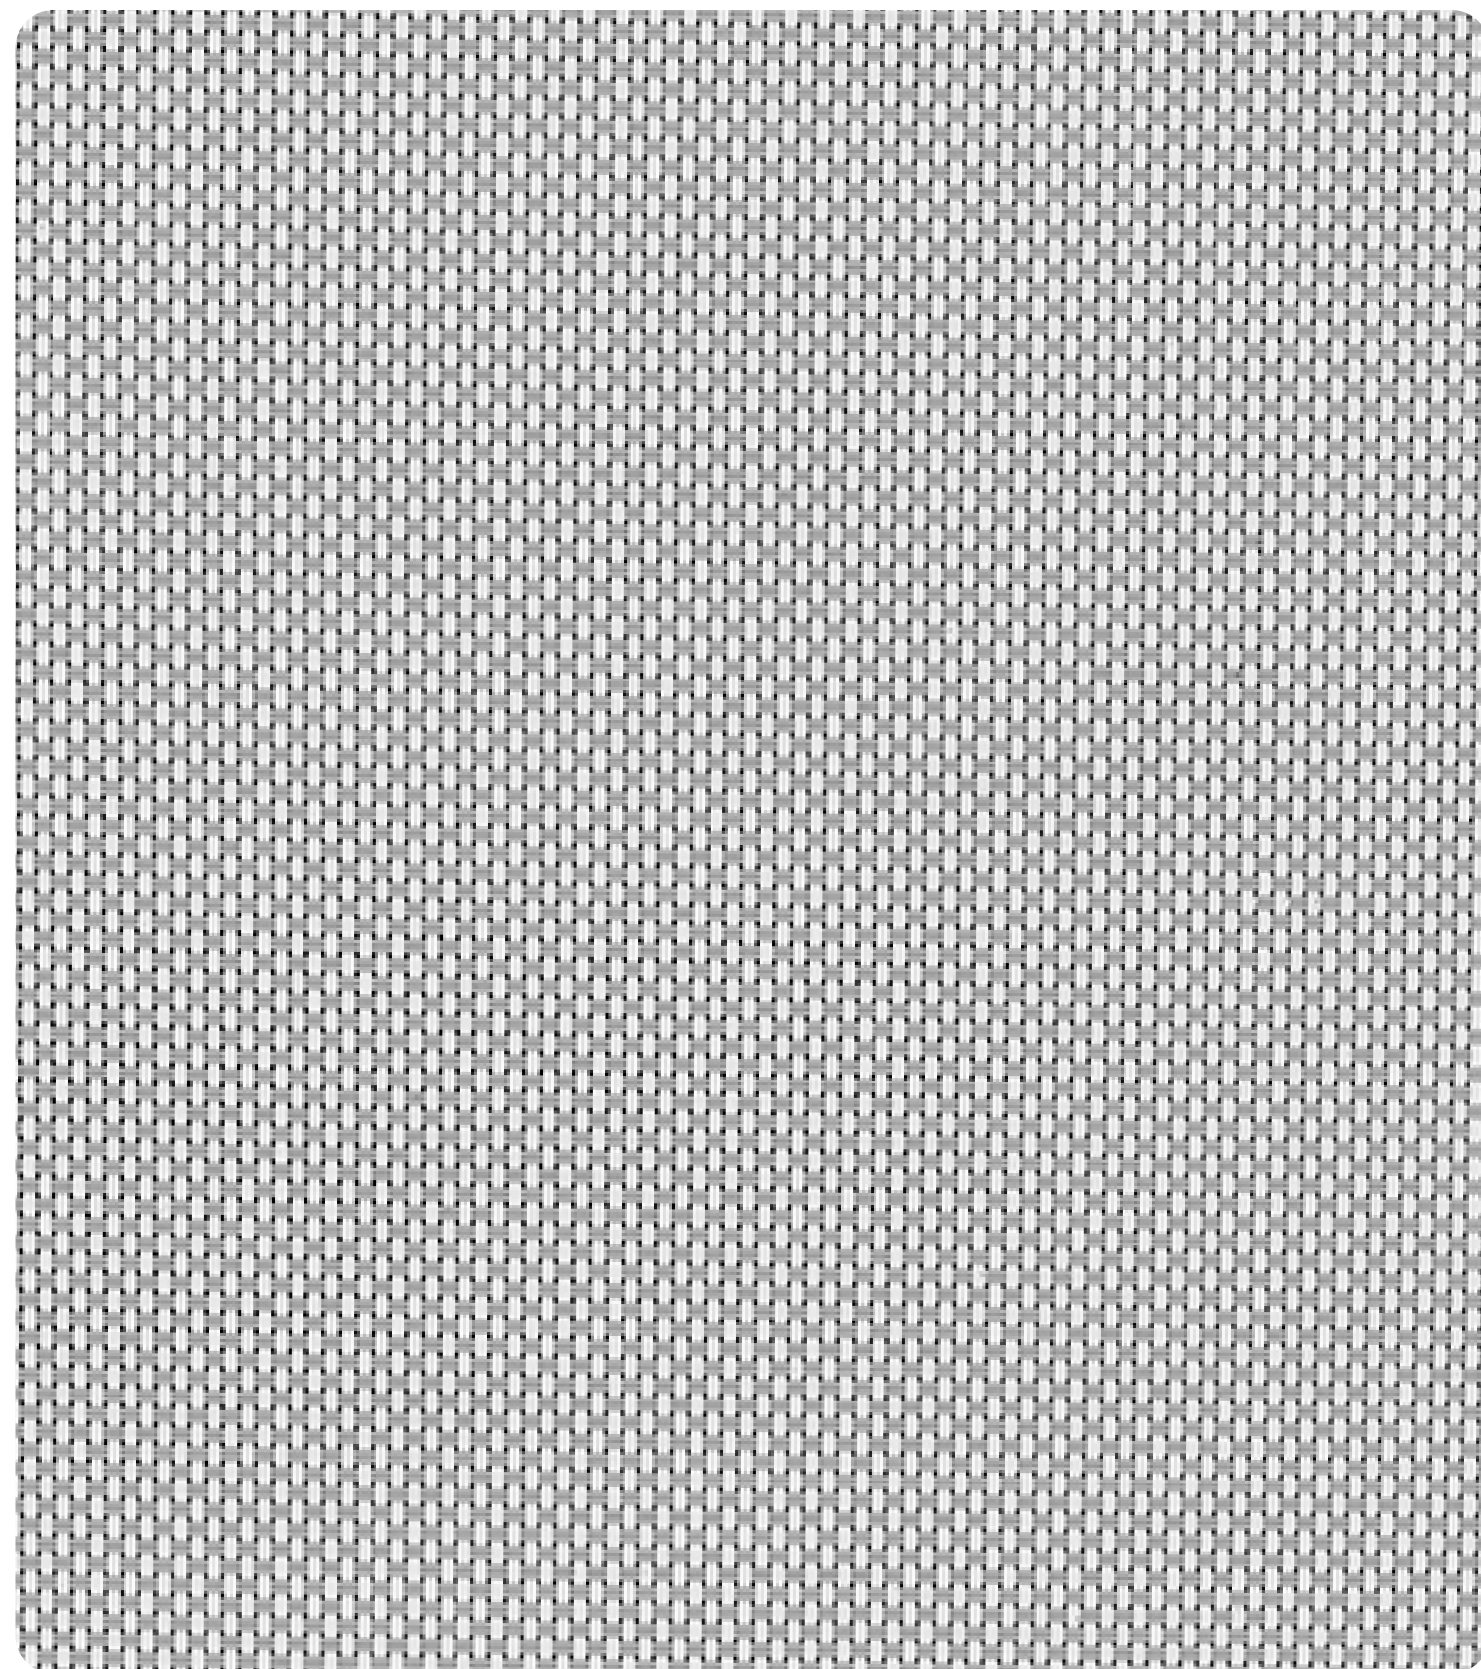


CRYSTAL PEARL 0-004-16-00798


550 CRYSTAL

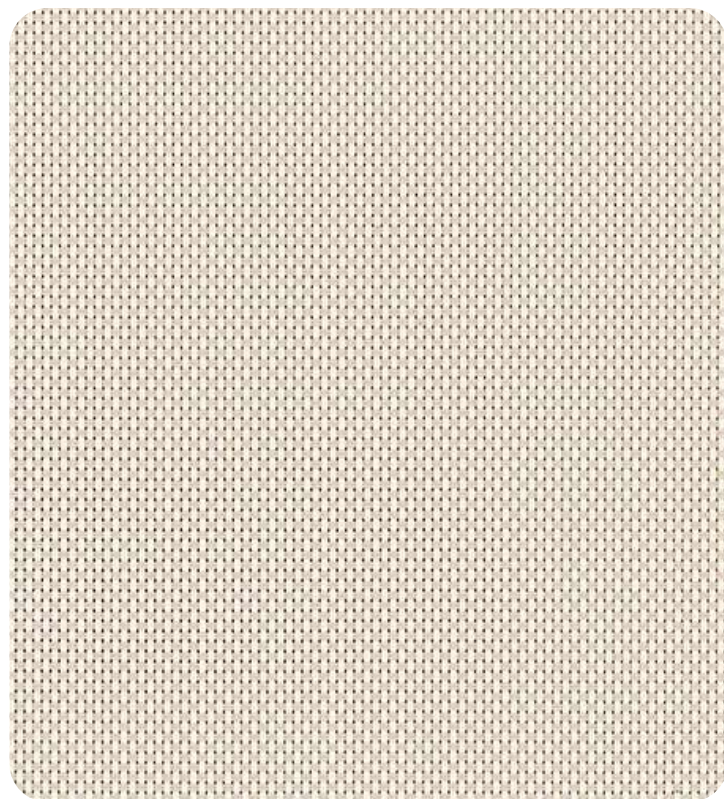


CRYSTAL WHITE 0-004-16-00298

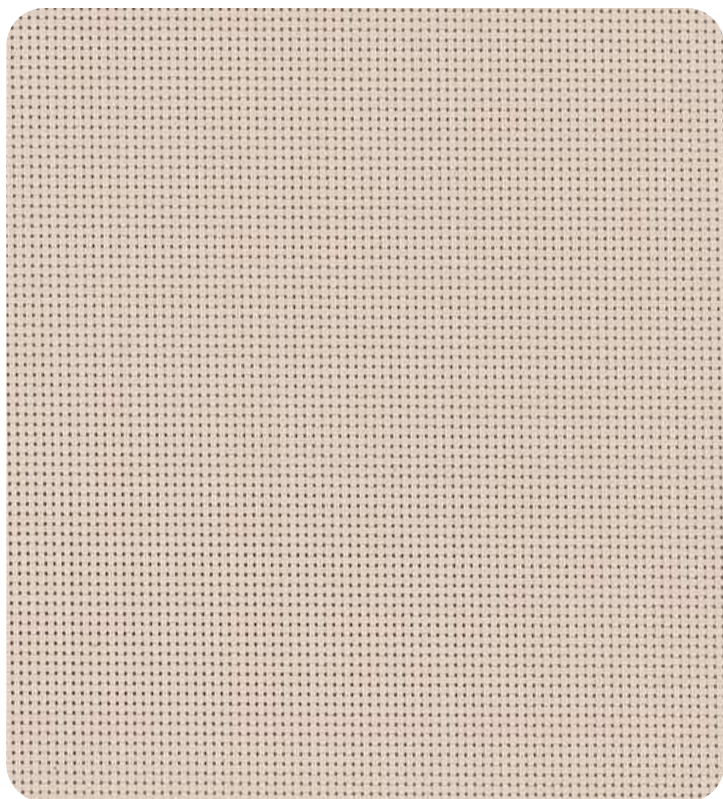

CRYSTAL EBONY 0-004-16-01998

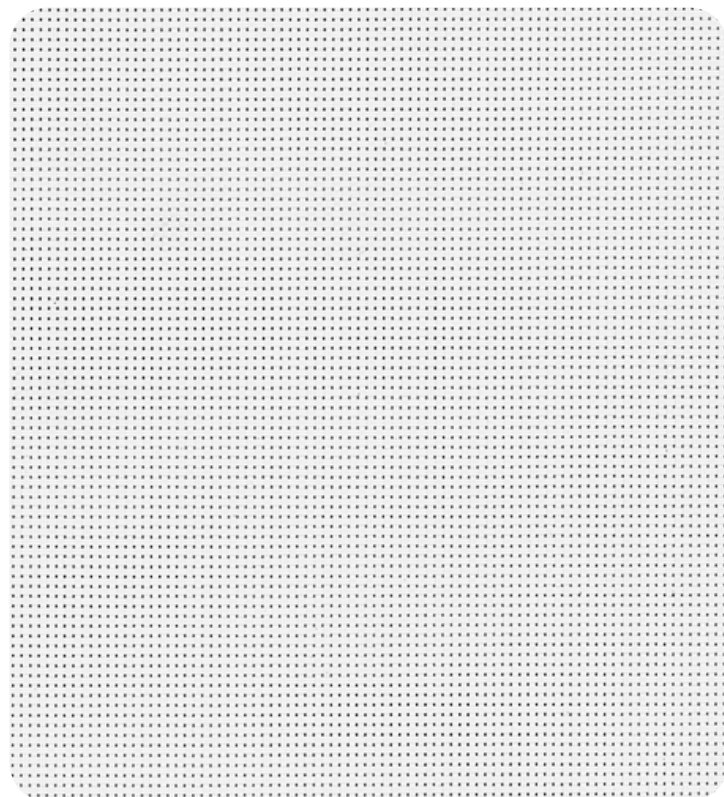


CRYSTAL CRYSTAL 0-004-16-60198

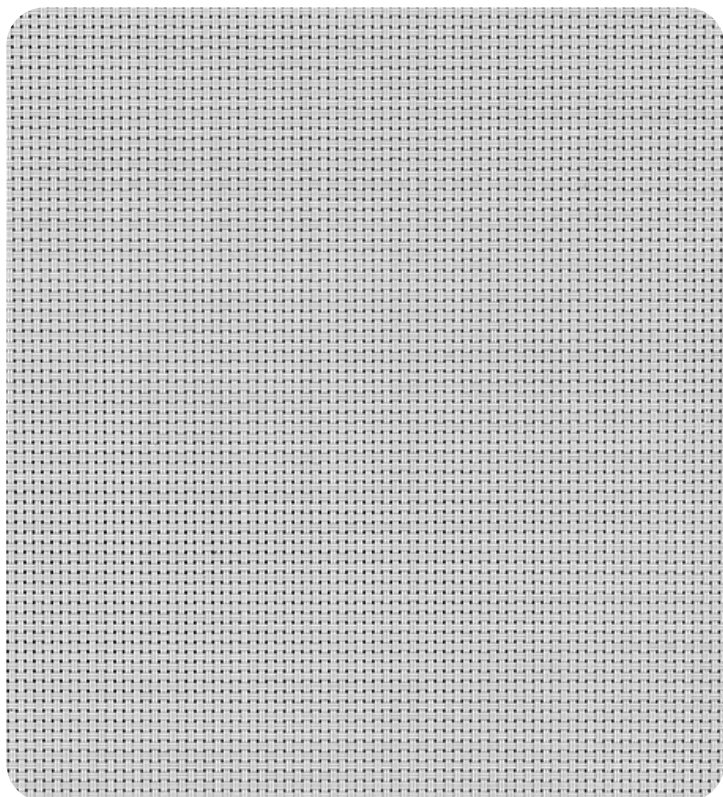


CRYSTAL LINEN 0-004-16-00398

550 CRYSTAL

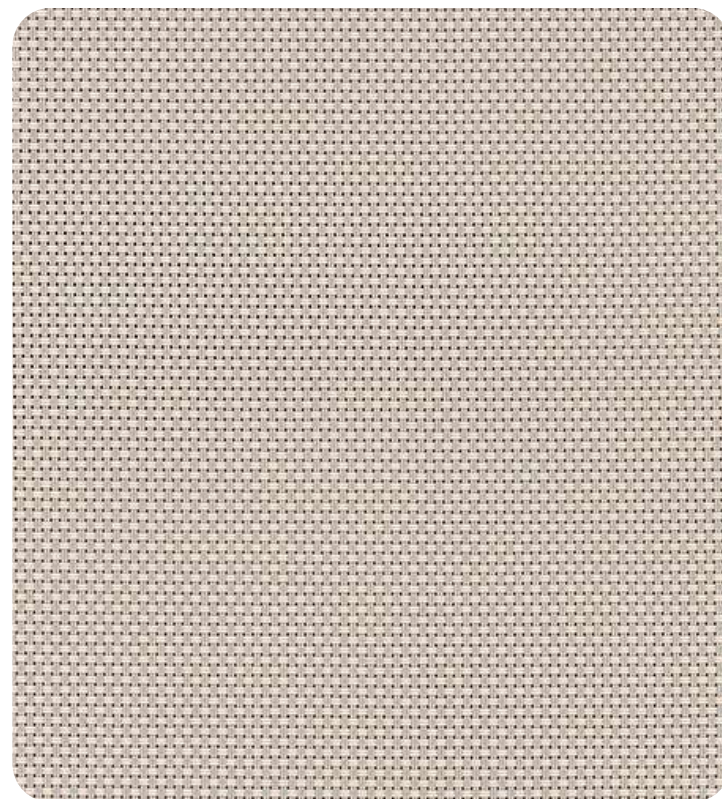

CRYSTAL SAND 0-004-16-00498

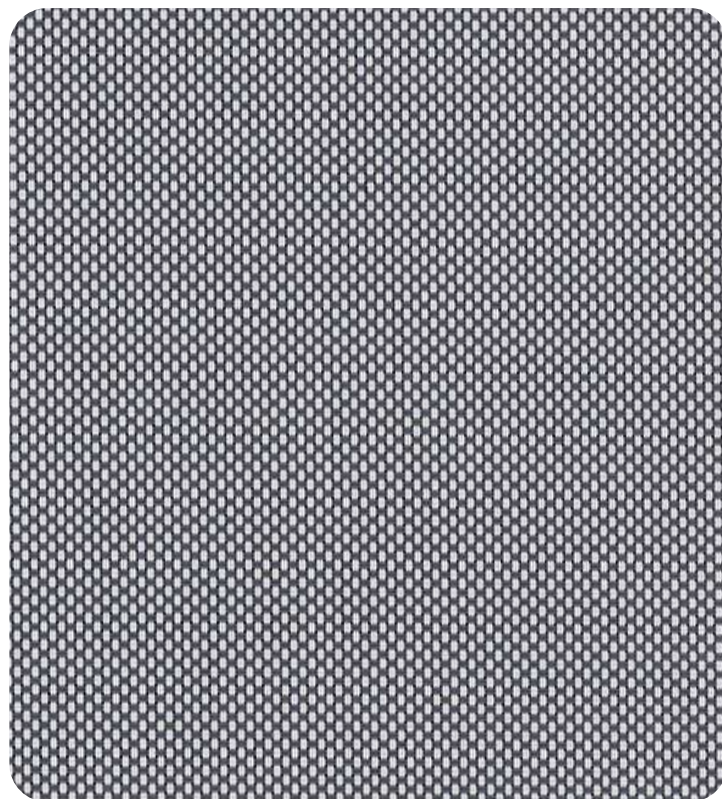

CRYSTAL GOLD 0-004-16-60498

POLYSCREEN-VISION®
550-5%



TECHNICAL PROPERTIES

Composition	-	15% HT-PES + 85% PVC
Weight	UNE EN 12127	610 g/m² ± 5% 17.99 oz/yd² ± 5%
Yarn / cm	Int. Method	Warp: 16.0 Weft: 13.5
Yarn Diameter	Int. Method	0.4 mm 0.016 in
Roll Width	-	2.5 m 98.4 in
Openness Factor	ASHRAE Standard 74:1998	~5%
UV Blockage	Int. Method	~95%
Thickness	UNE EN ISO 5084: 1997	0.80 mm ± 5% 0.031 in ± 5%
Light Fastness (Grey Scale Level)	UNE EN ISO 105 B06: 2002 (Interior)	5/5 4/5 White
	UNE EN ISO 105 B03: 1994 (Exterior)	5/5 4/5 White
	UNE EN ISO 105 B04: 1998 (Exterior)	5/5 4/5 White
	UNE EN ISO 4892-2 (Exterior)	5/5 4/5 White
	UNE EN ISO 105 B02: 2002 (Interior)	8/8 7/8 White
Light Fastness (Blue Scale Level)	UNE EN ISO 13937-3: 2001	Warp: 6.6 daN Weft: 5.3 daN
Tearing Resistance	UNE EN ISO 13934-1: 1999	Warp: 174 daN/5cm Weft: 133 daN/5cm
Breaking Strength	UNE EN ISO 13934-1: 1999	Warp: 22% Weft: 21%
Stretch	UNE EN ISO 112-017: 92	Without changes in surface
Corrosion in Saline Environment - Neutral Fog	ISO 9227: 90	Without changes in surface
Odor Test	PV-3900	3 Pass
Flame Retardant	EN 13773: 2003	Class 1
	EN 13501-1:2007	Bs2d0
	DIN 4102	B1
	NFPA 701	Pass
	CAN/ULC-S109-03	Pass
Noise Reduction	UNI 9177	Class 1
Wheelmark	-	Yes
Microorganism Growth Inhibition	IMO Res. MSC.307(88)-(2010 FTP Code) and MSC/Circ.1102	Pass
Recycled Content	ASTM 2180-01 and ASTM G21-09	Yes
	-	2% Pre-Consumer

SUNLIGHT CONTROL PROPERTIES

OPENNESS FACTOR: 5%				g _{TOT} INTERNAL GLAZING C		g _{TOT} INTERNAL GLAZING D	
COLOR	Ts(%)	Rs(%)	As(%)	Gtot	Class	Gtot	Class
Ash	06	08	86	0.49	1	0.28	2
Bronze	07	07	86	0.49	1	0.28	2
Ebony	07	03	90	0.50	0	0.28	2
Linen	17	61	22	0.36	1	0.24	2
Pearl	10	46	44	0.39	1	0.25	2
Pearl Grey	09	33	58	0.43	1	0.26	2
Pearl Linen	12	51	37	0.38	1	0.25	2
Pearl Sand	10	40	50	0.41	1	0.25	2
Sand	07	29	64	0.42	1	0.26	2
Tobacco	07	05	88	0.50	1	0.28	2
White	15	78	07	0.32	2	0.23	2
White Linen	16	71	13	0.34	2	0.24	2
White Pearl	12	64	24	0.35	1	0.24	2

Data measured according to EN 410:2011 and EN 14500:2008. Calculations of gtot are according to EN 13363-1, with 10% frame area. Classification of thermal and visual characteristic according to EN 14501. Data of gtot are given using standard Glazing C and D, though any other combination may be calculated under request. According to the EN 13363-1 standard, the classification of thermal and visual comfort performance is configured on a scale of 0 to 4, where 0 is the lowest score and 4 is the highest. The classification is calculated in combination with the type of glass, Type C: Double-Glazing [4 mm floating + 16 mm argon-filled chamber + 4 mm floating] or Type D: Reflective Double-Glazing [4 mm floating + 16 mm argon-filled chamber + 4 mm floating with a low emissivity layer]. A gtot of 0.24 rejects a 76% of the solar energy received.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.



POLYSCREEN-VISION®
550-5%




CARE & MAINTENANCE



1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Hand wash with lukewarm water and a mild detergent solution.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

APPLICATIONS

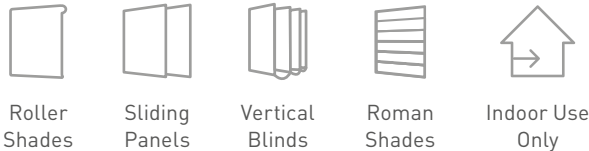


INTERNATIONAL CERTIFICATIONS



Polyscreen Vision® fabrics are covered by a 10-Year Warranty when installed indoors. Also, the Vertilux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.



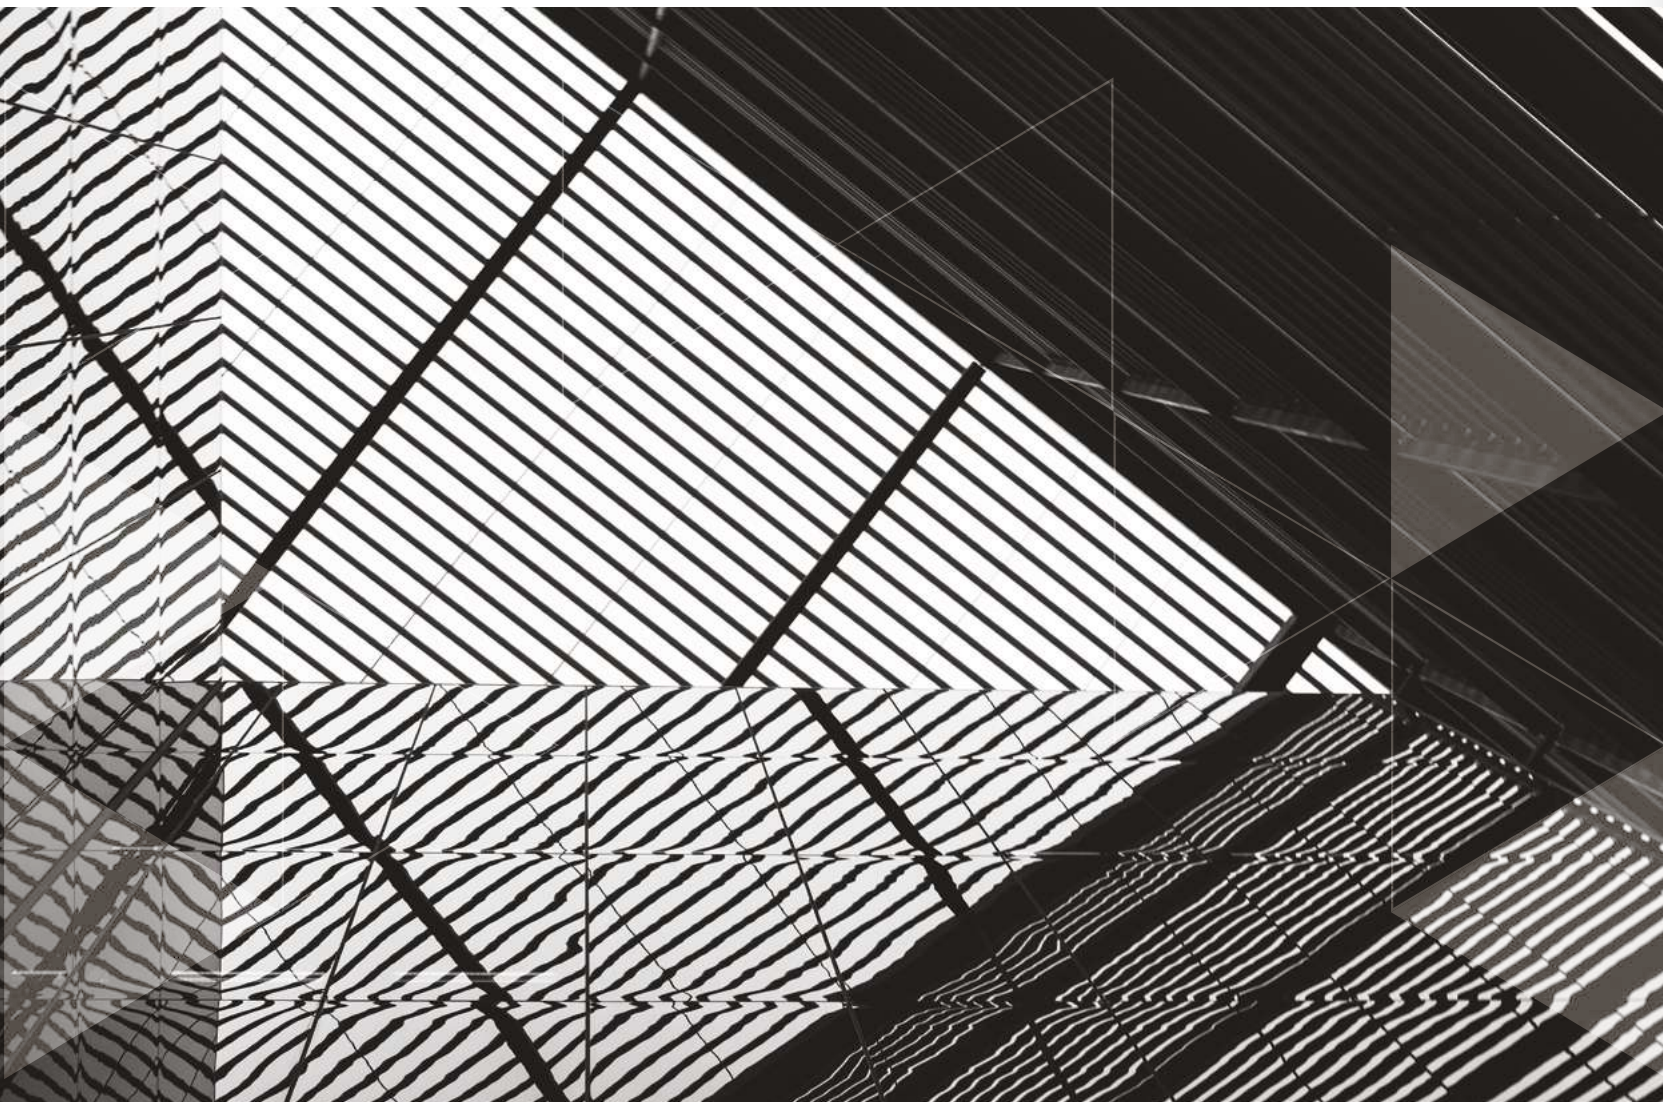


597-8%

POLYSCREEN-VISION




COLECCIÓN VISION POLYSCREEN

597-8%


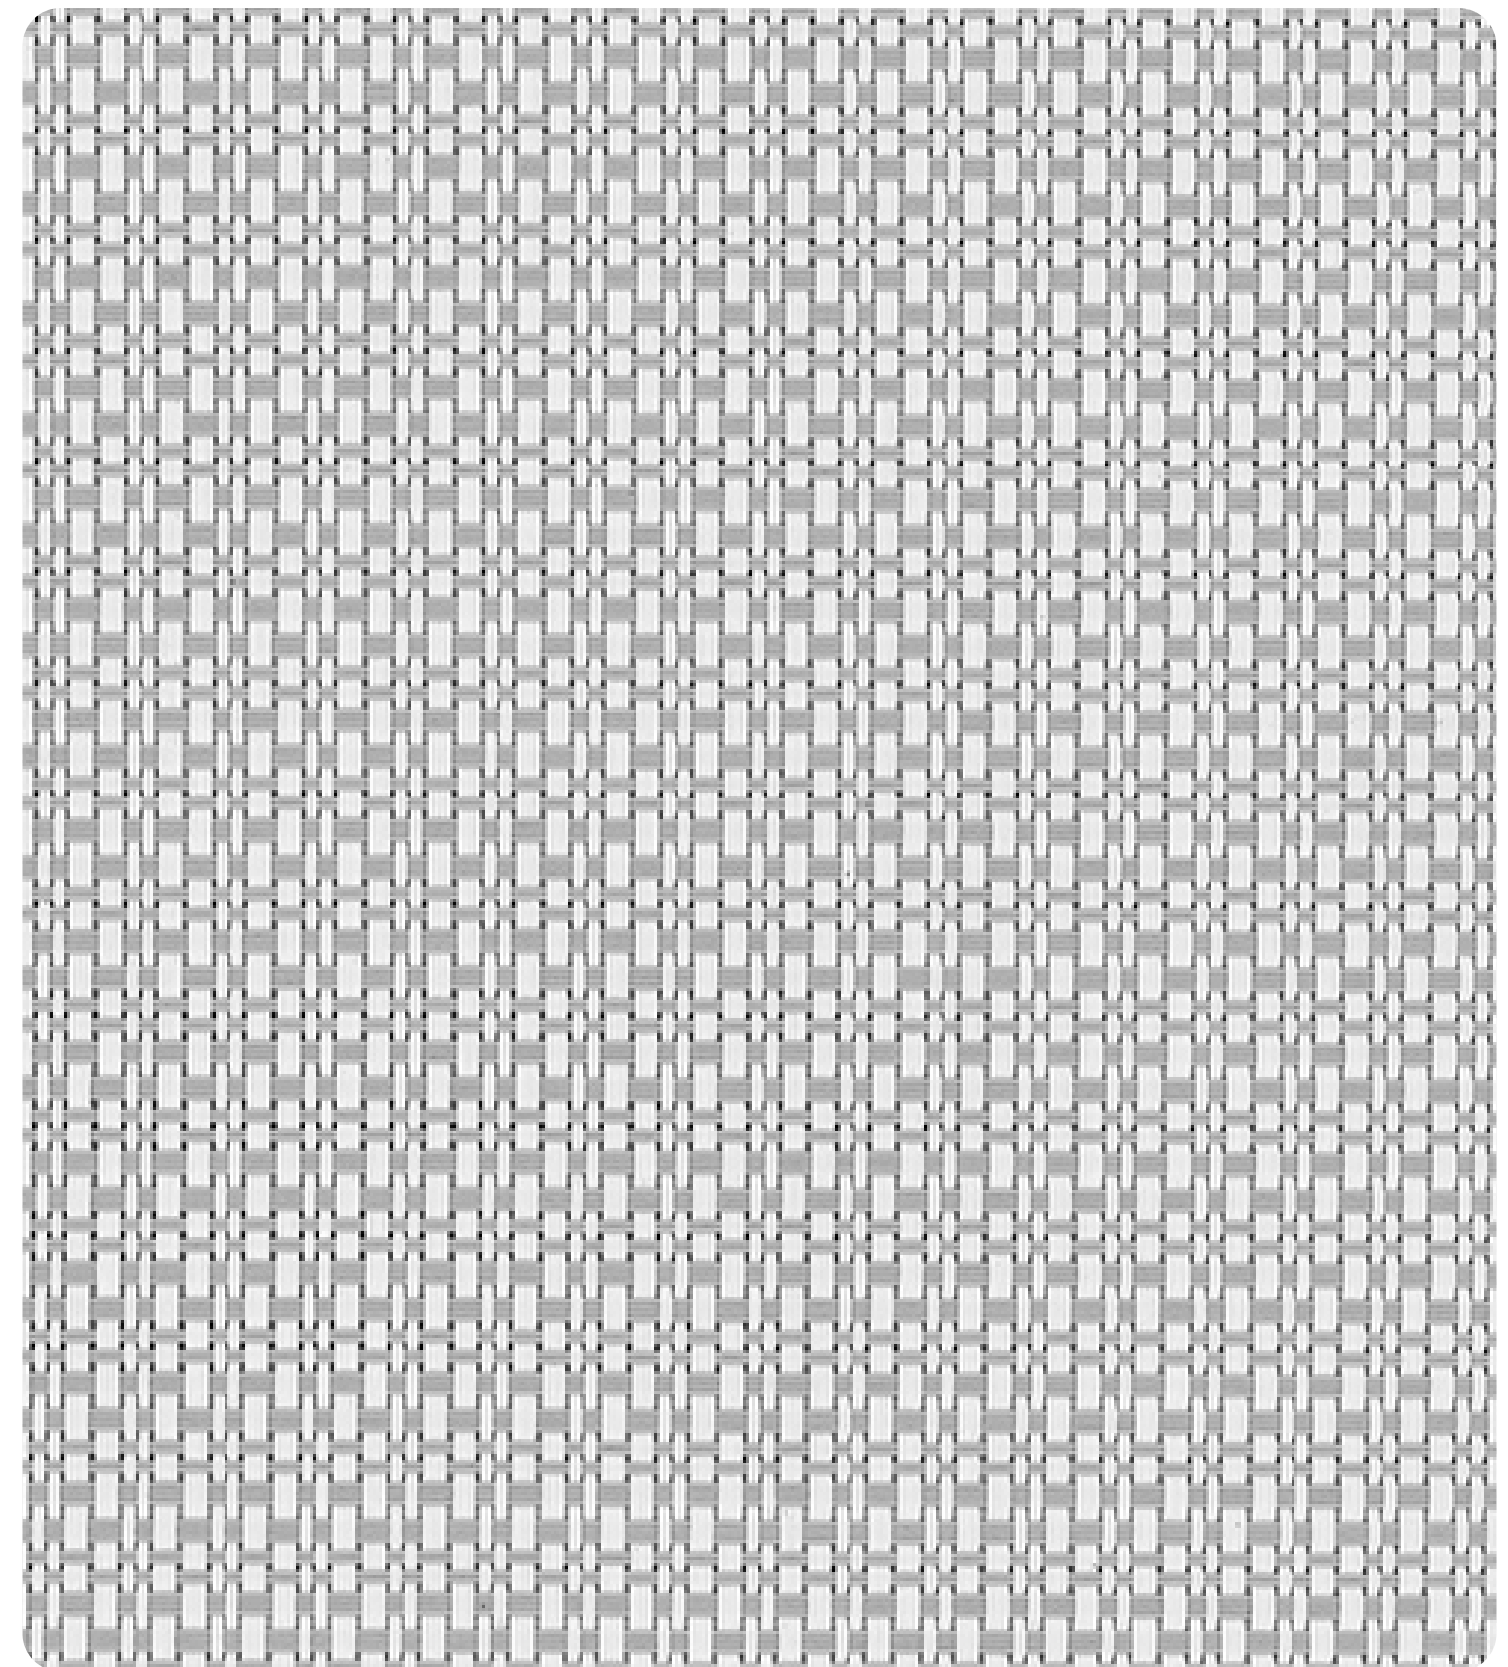


WHITE PEARL 0-004-14-02798

597-8%

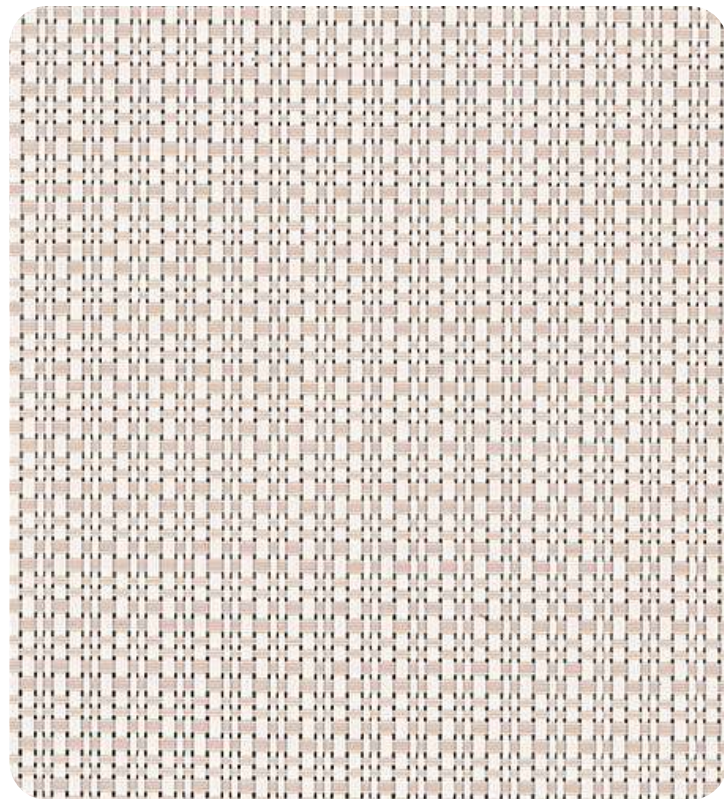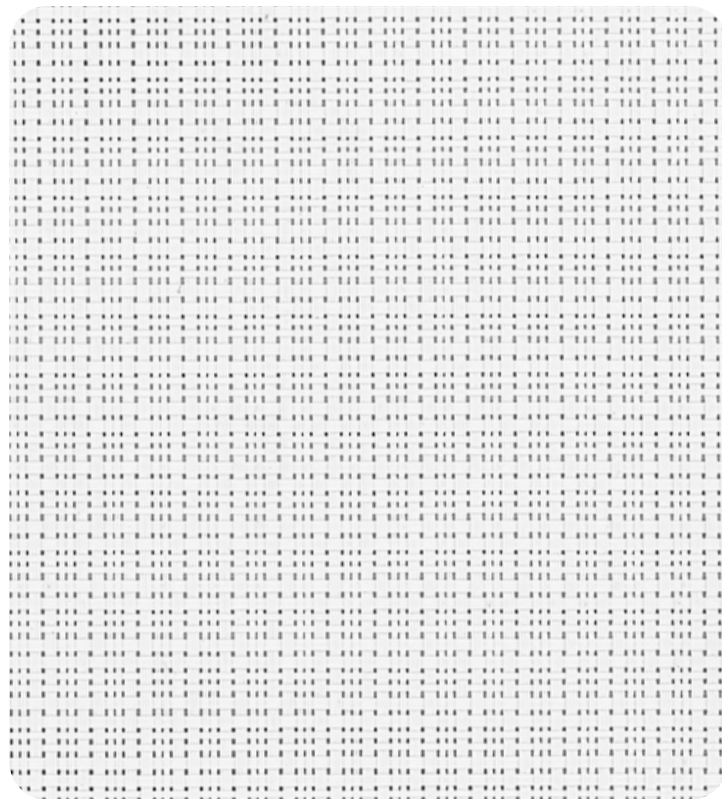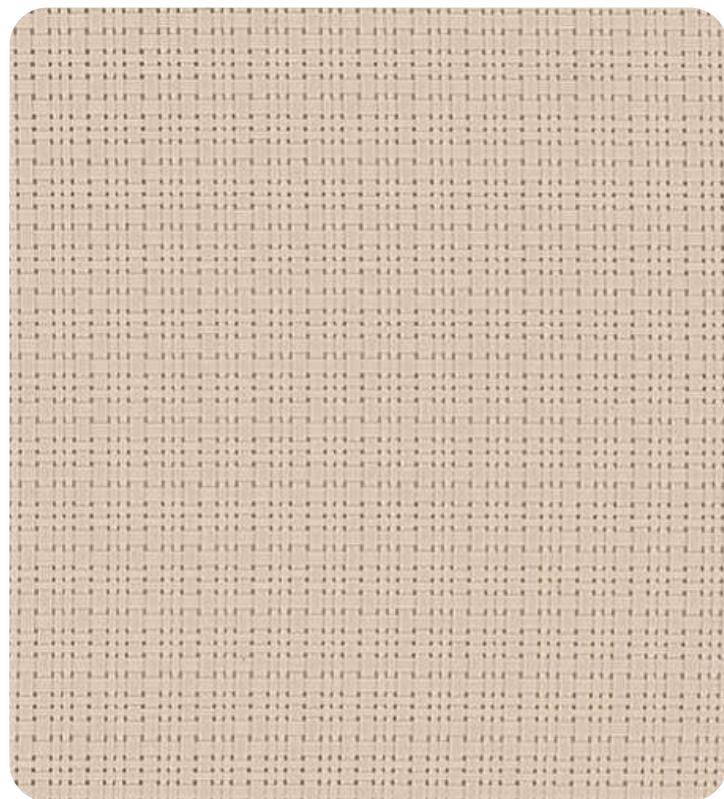**WHITE LINEN** 0-004-14-22098**WHITE** 0-004-14-00298**LINEN** 0-004-14-00398**LINEN SAND** 0-004-14-10498

597-8%

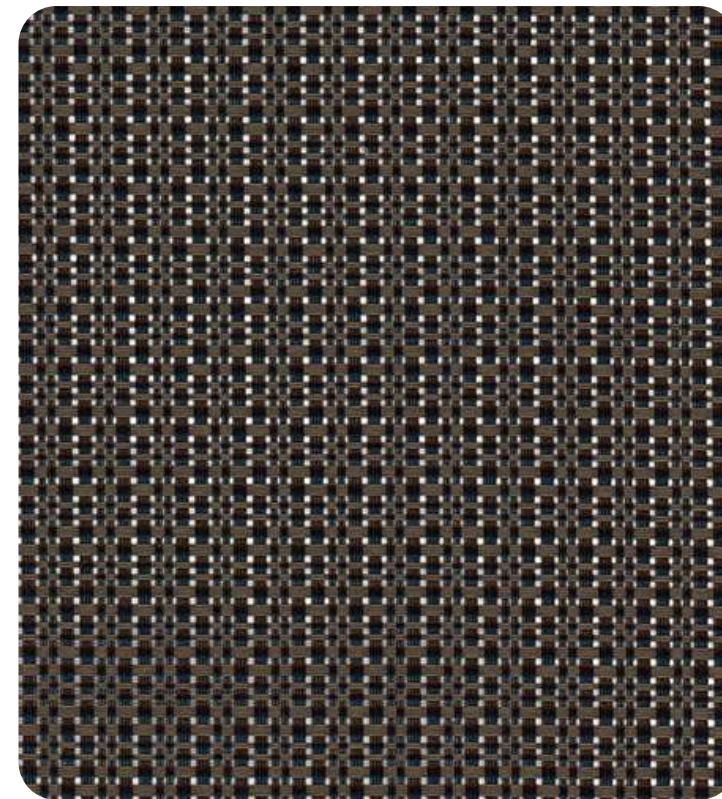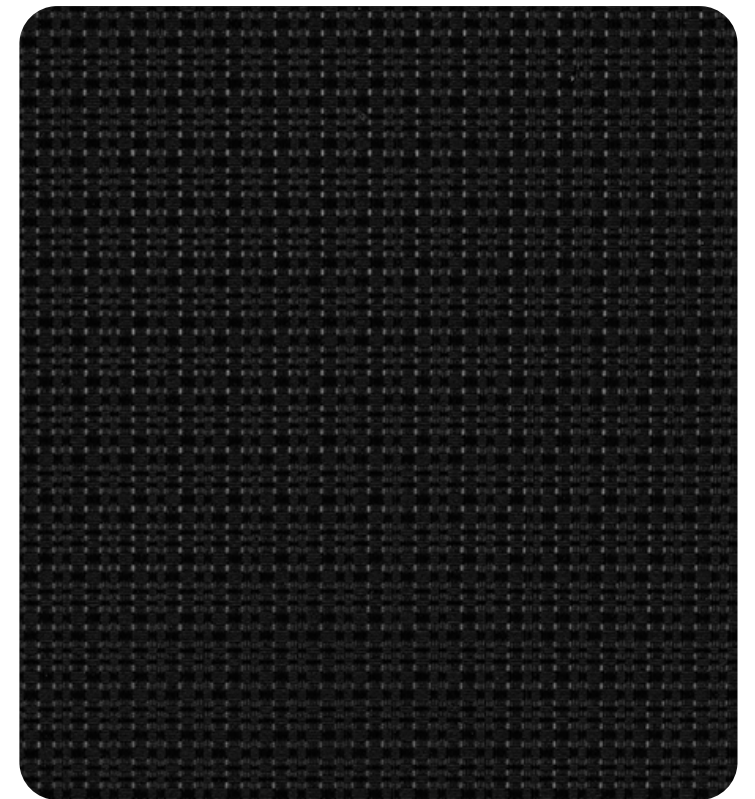**TOBACCO** 0-004-14-01898**EBONY** 0-004-14-01998

POLYSCREEN-VISION®
597-8%



TECHNICAL PROPERTIES

Composition	-	15% HT-PES + 85% PVC
Weight	UNE EN 12127	610 g/m² ± 5% 17.99 oz/yd² ± 5%
Yarn / cm	Int. Method	Warp: 16 Weft: 13
Yarn Diameter	Int. Method	0.4 mm 0.016 in
Roll Width	-	2.5 m 98.4 in
Openness Factor	-	~8%
UV Blockage	-	~90%
Thickness	UNE EN ISO 5084: 1997	0.8 mm ± 5% 0.031 in ± 5%
Light Fastness (Grey Scale Level)	UNE EN ISO 105 B06: 2002 (Interior)	5/5 4/5 White
	UNE EN ISO 105 B03: 1994 (Exterior)	5/5 4/5 White
	UNE EN ISO 105 B04: 1998 (Exterior)	5/5 4/5 White
	UNE EN ISO 4892-2 (Exterior)	5/5 4/5 White
	UNE EN ISO 105 B02: 2002 (Interior)	8/8 7/8 White
Light Fastness (Blue Scale Level)	UNE EN ISO 13937-3: 2001	Warp: 13.4 daN Weft: 13.8 daN
Tearing Resistance	UNE EN ISO 13934-1: 1999	Warp: 180 daN/5cm Weft: 147 daN/5cm
Breaking Strength	UNE EN ISO 13934-1: 1999	Warp: 21.0% Weft: 22.0%
Stretch	UNE EN ISO 112-017: 92	Without changes in surface
Corrosion in Saline Environment - Neutral Fog	ISO 9227: 90	Without changes in surface
Odor Test	PV-3900	3 Pass
Flame Retardant	EN 13773: 2003	Class 1
	EN 13501-1:2007	Bs2d0
	DIN 4102	B1
	NFPA 701	Pass
Wheelmark	CAN/ULC-S109-03	Pass
	IMO Res. MSC.307[88]-(2010 FTP Code) and MSC/Circ.1102	Pass
	ASTM 2180-01 and ASTM G21-09	Yes
Microorganism Growth Inhibition	-	2% Pre-Consumer
Recycled Content	-	

SUNLIGHT CONTROL PROPERTIES

OPENNESS FACTOR: 8%				g _{TOT} INTERNAL GLAZING C		g _{TOT} INTERNAL GLAZING D	
COLOR	Ts(%)	Rs(%)	As(%)	Gtot	Class	Gtot	Class
Ebony	08	03	89	0.50	0	0.28	2
Linen	20	40	40	0.40	1	0.25	2
Linen Sand	19	35	46	0.41	1	0.26	2
Tobacco	08	05	87	0.50	0	0.28	2
White	19	68	13	0.32	2	0.23	2
White Linen	20	62	18	0.34	2	0.24	2
White Pearl	17	55	28	0.36	1	0.24	2

Data measured according to EN 410:2011 and EN 14500:2008. Calculations of g_{tot} are according to EN 13363-1, with 10% frame area. Classification of thermal and visual characteristic according to EN 14501. Data of g_{tot} are given using standard Glazing C and D, though any other combination may be calculated under request. According to the EN 13363-1 standard, the classification of thermal and visual comfort performance is configured on a scale of 0 to 4, where 0 is the lowest score and 4 is the highest. The classification is calculated in combination with the type of glass, Type C: Double-Glazing [4 mm floating + 16 mm argon-filled chamber + 4 mm floating] or Type D: Reflective Double-Glazing [4 mm floating + 16 mm argon-filled chamber + 4 mm floating with a low emissivity layer]. A g_{tot} of 0.24 rejects a 76% of the solar energy received.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶

POLYSCREEN-VISION®
597-8%




CARE & MAINTENANCE



1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Hand wash with lukewarm water and a mild detergent solution.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.

APPLICATIONS

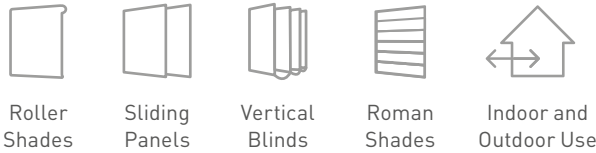


MANUFACTURING



Can be Railroaded

Ultrasonic Cut NOT Required

OTHER BENEFITS



INTERNATIONAL CERTIFICATIONS



Polyscreen Vision® fabrics are covered by a 10-Year Warranty when installed indoors and a 5-Year Warranty when installed outdoors. Also, the Vertilux Collection has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶




314

GLEAMOROUS





COLECCIÓN VISION POLYSCREEN

314



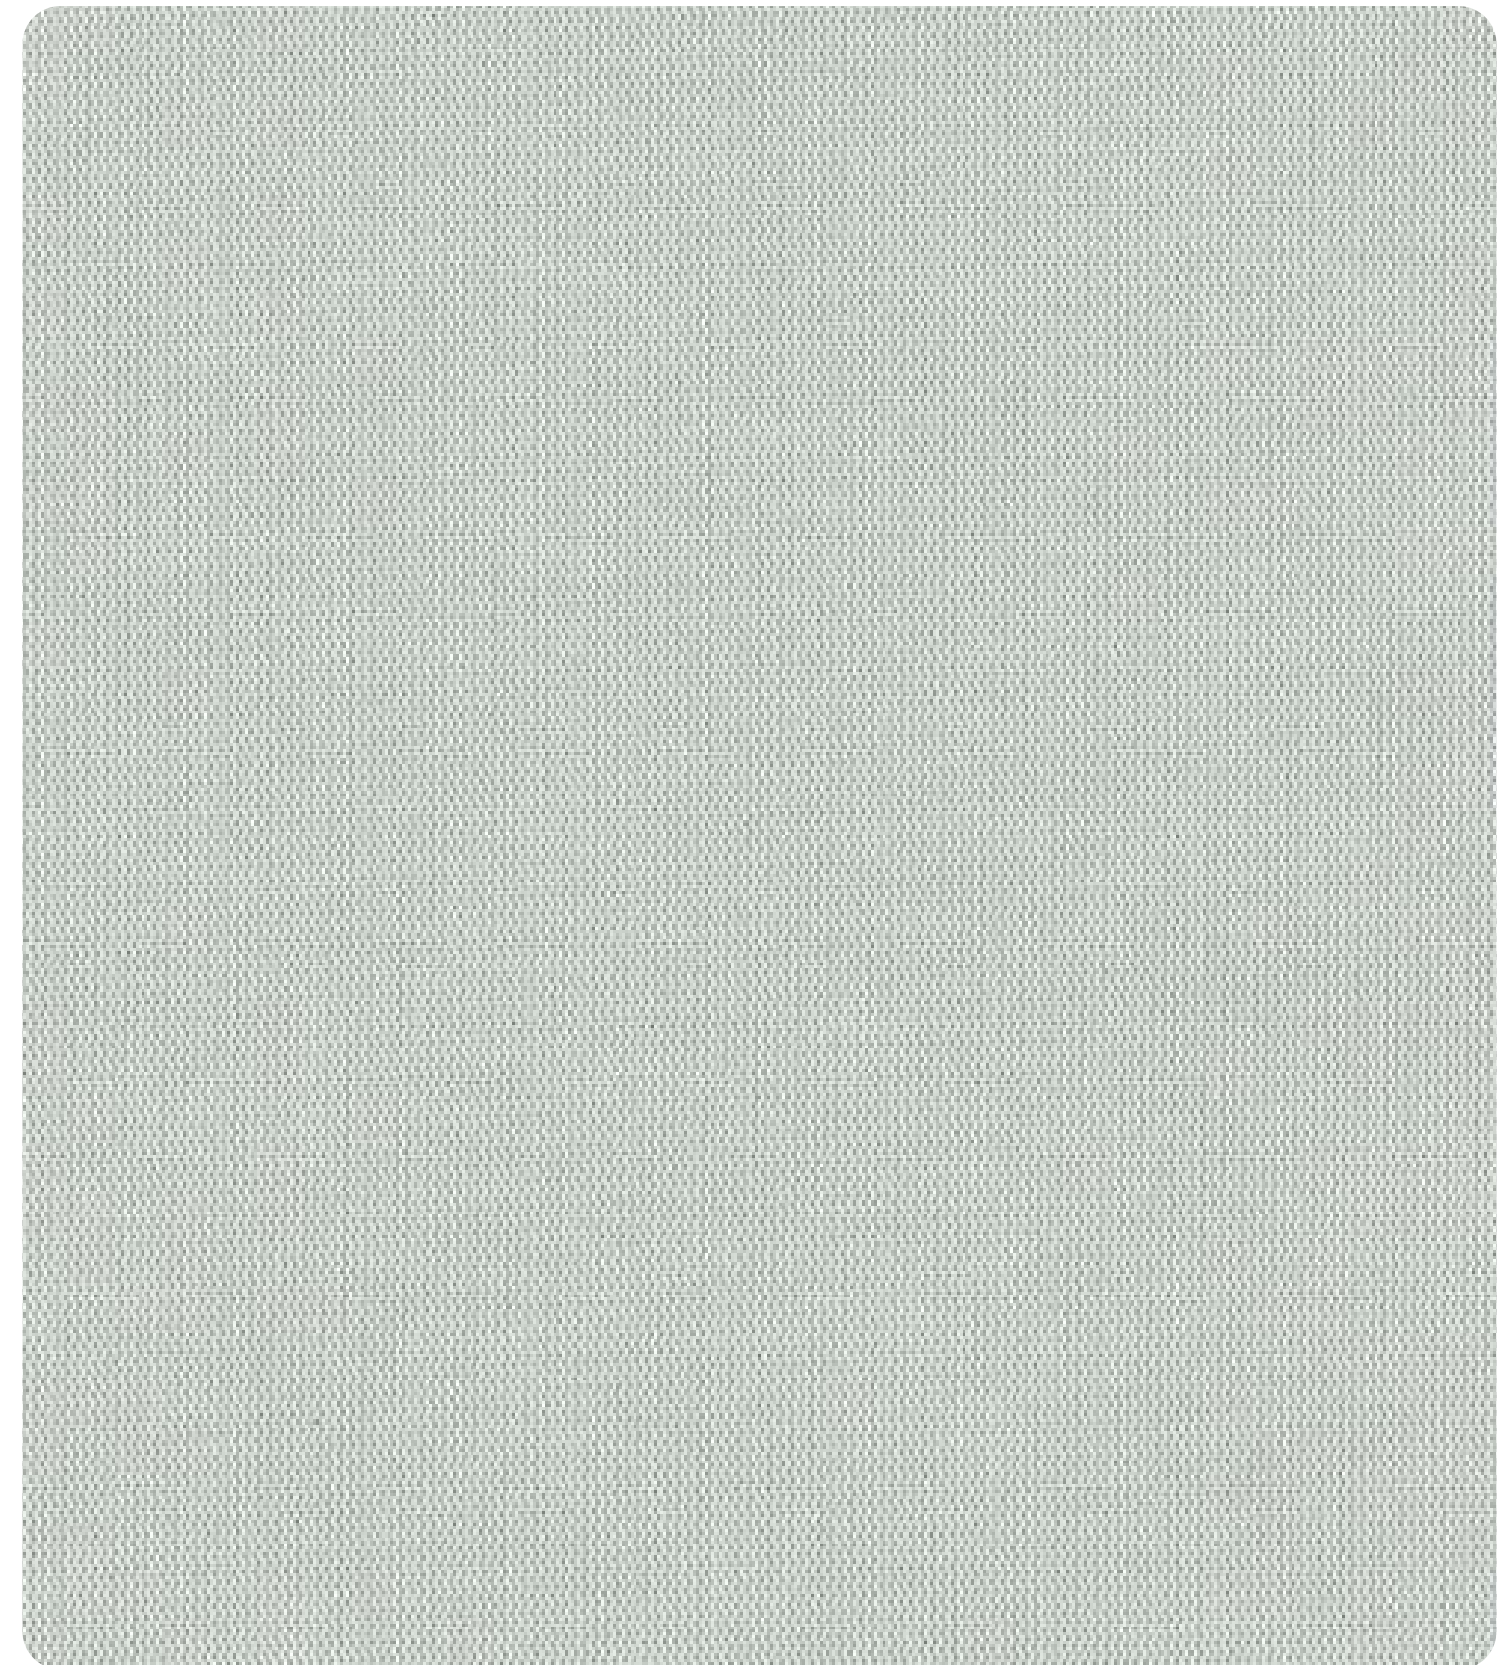


WHITE GREY 0-004-13-02198

314

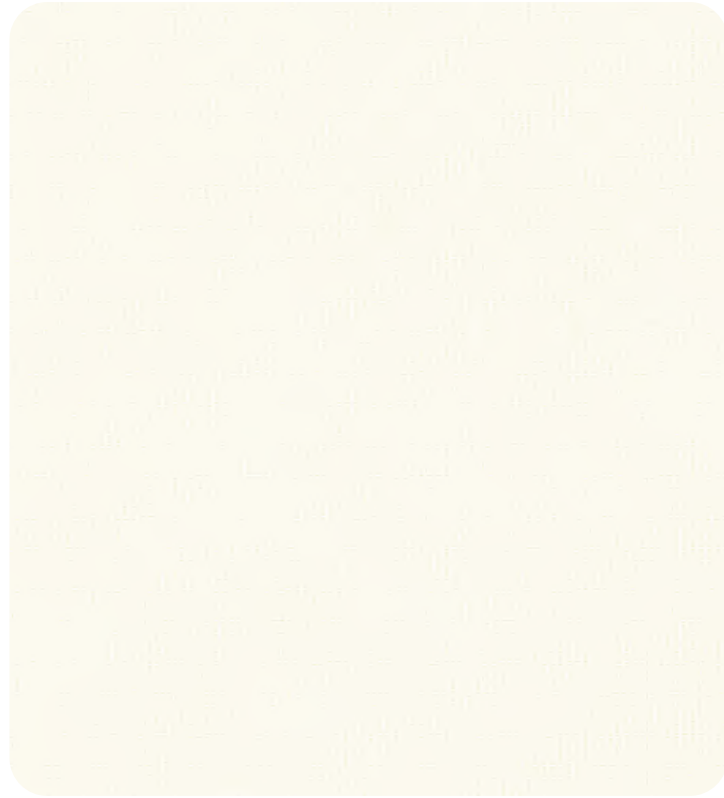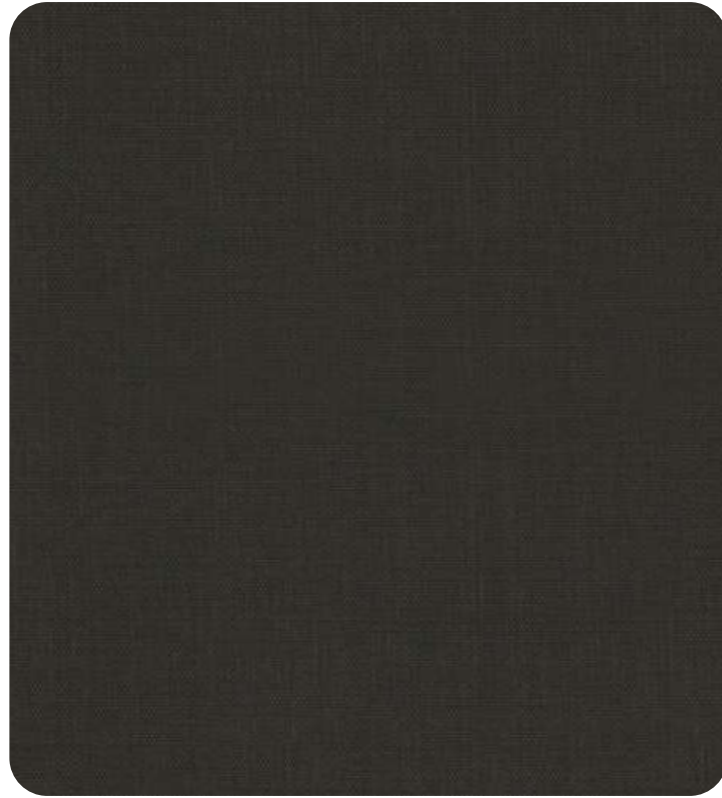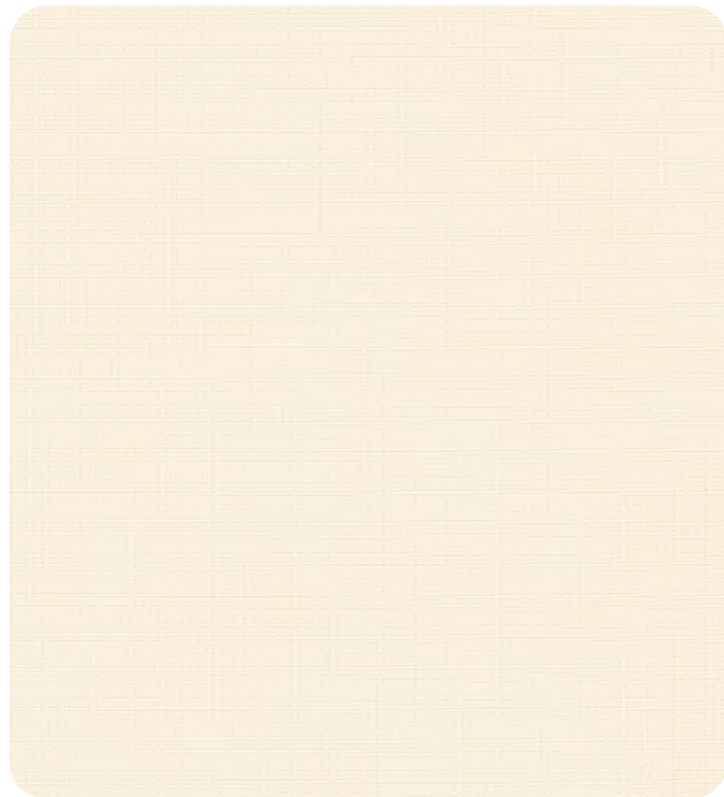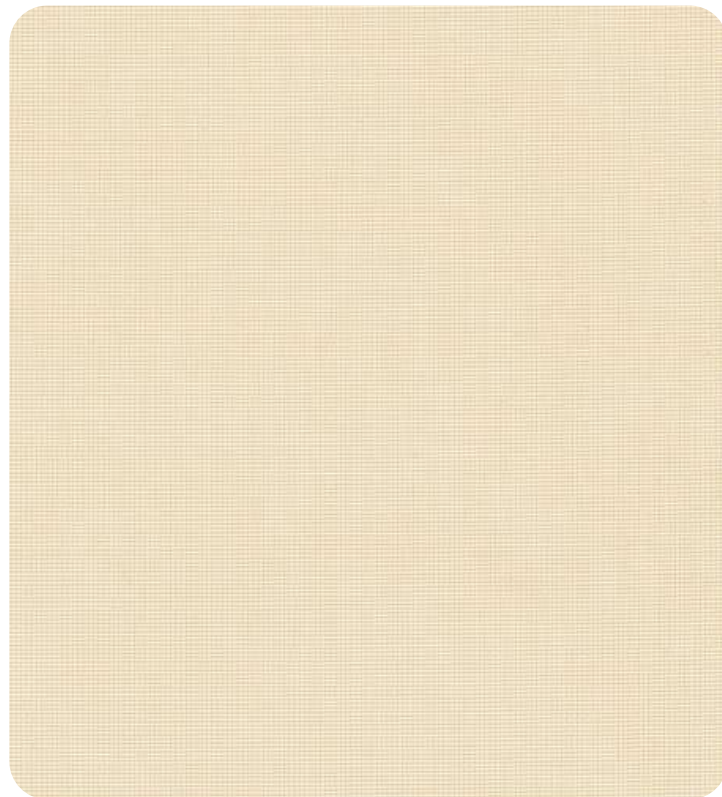**WHITE** 0-004-13-00298**EBONY** 0-004-13-01998**LINEN WHITE** 0-004-13-10298**LINEN** 0-004-13-10398

314

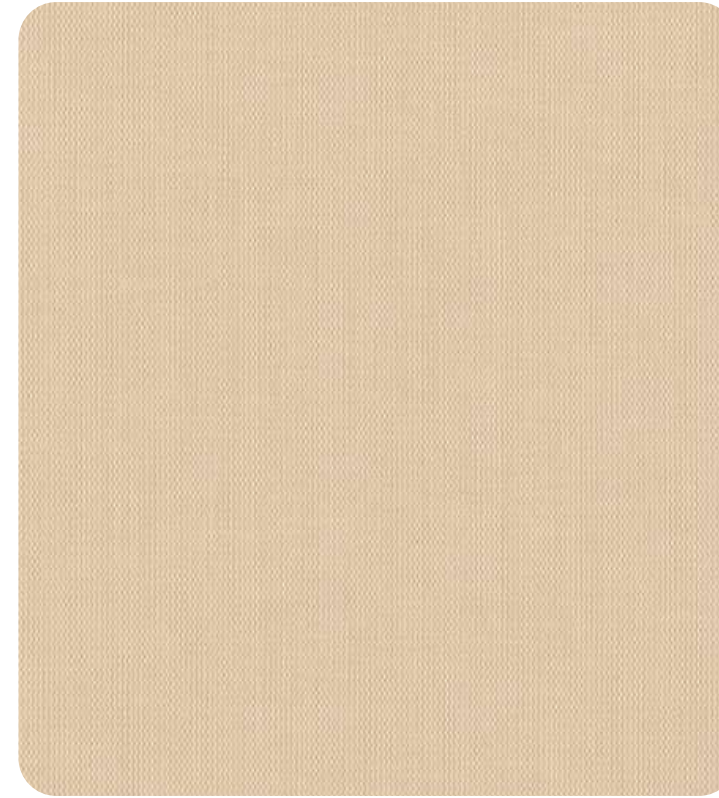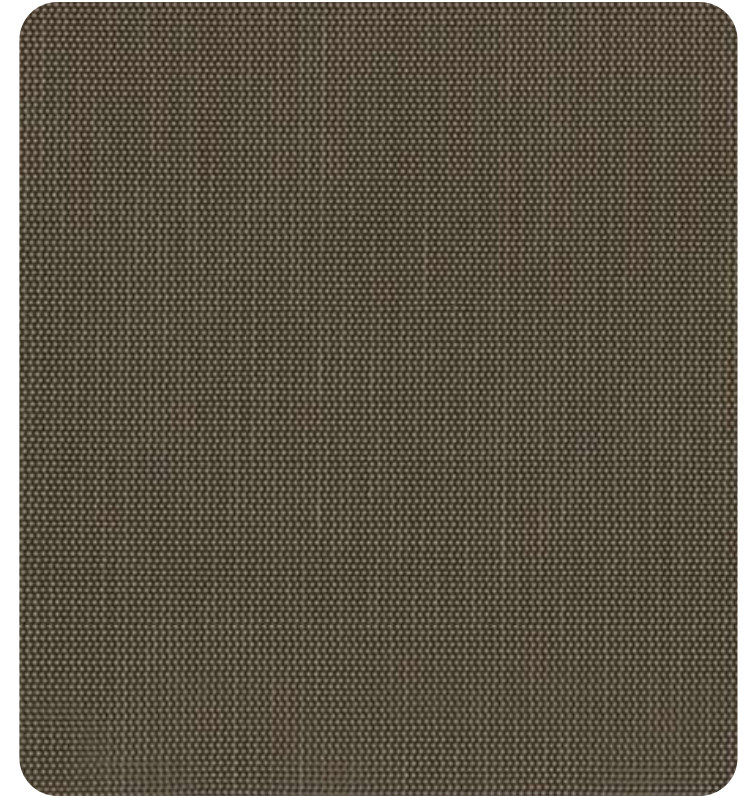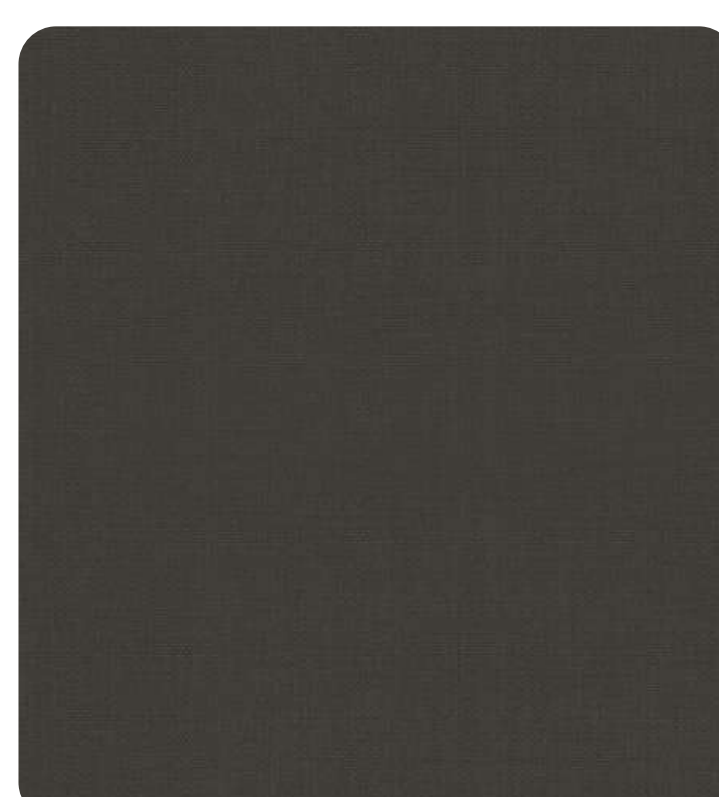**LINEN SAND** 0-004-13-10498**EBONY SAND** 0-004-13-00498**EBONY BRONZE** 0-004-13-00698

GLEAMOROUS 314



TECHNICAL PROPERTIES

Composition	-	20% HT-PES + 80% PVC
Weight	UNE EN 12127	337 g/m² ± 5% 9.93 oz/yd² ± 5%
Yarn / cm	Int. Method	Warp: 17 Weft: 10.2
Yarn Diameter	Int. Method	0.3 mm 0.011 in
Roll Width	-	2.5 m 98.4 in
Openness Factor	-	~14%
UV Blockage	-	~86%
Thickness	UNE EN ISO 5084: 1997	0.56 mm ± 5% 0.022 in ± 5%
Light Fastness (Grey Scale Level)	UNE EN ISO 105 B06: 2002 (Interior)	5/5 4/5 White
	UNE EN ISO 105 B03: 1994 (Exterior)	5/5 4/5 White
	UNE EN ISO 105 B04: 1998 (Exterior)	5/5 4/5 White
	UNE EN ISO 4892-2 (Exterior)	5/5 4/5 White
Light Fastness (Blue Scale Level)	UNE EN ISO 105 B02: 2002 (Interior)	8/8 7/8 White
Tearing Resistance	UNE EN ISO 13937-3: 2001	Warp: 3.9 daN Weft: 2.7 daN
Breaking Strength	UNE EN ISO 13934-1: 1999	Warp: 138.6 daN/5cm Weft: 82.6 daN/5cm
Stretch	UNE EN ISO 13934-1: 1999	Warp: 25% Weft: 18%
Corrosion in Saline Environment - Neutral Fog	UNE EN ISO 112-017: 92	Without changes in surface
Odor Test	ISO 9227: 90	Without changes in surface
Flame Retardant	PV-3900	3 Pass
	EN 13773: 2003	Class 1
	DIN 4102	B1
	EN 13501-1:2007	Bs2d0
Wheelmark	NFPA 701	Pass
	CAN/ULC-S109-03	Pass
	IMO Res. MSC.307 (88)-(2010 FTP Code)	Pass
		Pass
Noise Reduction	-	Yes
Microorganism Growth Inhibition	ASTM 2180-01 and ASTM G21-09	Yes
Recycled Content	-	2% Pre-Consumer

SUNLIGHT CONTROL PROPERTIES

OPENNESS FACTOR: 14%				g _{TOT} INTERNAL GLAZING C		g _{TOT} INTERNAL GLAZING D	
COLOR	Ts(%)	Rs(%)	As(%)	Gtot	Class	Gtot	Class
Ebony	13	04	83	0.50	1	0.28	2
Ebony Bronze	13	05	82	0.50	1	0.28	2
Ebony Sand	13	10	77	0.49	1	0.28	2
Linen	24	56	20	0.41	1	0.26	2
Linen Sand	19	43	38	0.43	1	0.26	2
Linen White	23	60	17	0.40	1	0.25	2
White	22	68	10	0.37	1	0.25	2
White Grey	13	45	42	0.45	1	0.27	2

Data measured according to EN 410:2011 and EN 14500:2008. Calculations of g_{tot} are according to EN 13363-1, with 10% frame area. Classification of thermal and visual characteristic according to EN 14501. Data of g_{tot} are given using standard Glazing C and D, though any other combination may be calculated. According to the EN 13363-1 standard, the classification of thermal and visual comfort performance is configured on a scale of 0 to 4, where 0 is the lowest score and 4 is the highest. The classification is calculated in combination with the type of glass, Type C: Double-Glazing (4 mm floating + 16 mm argon-filled chamber + 4 mm floating) or Type D: Reflective D (4 mm floating + 16 mm argon-filled chamber + 4 mm floating with a low emissivity layer). A g_{tot} of 0.24 rejects a 76% of the solar energy received.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

OPTICAL PROPERTIES

GLARE CONTROL	NIGHT PRIVACY	VISUAL CONTACT	DAYLIGHT UTILISATION
Class	Class	Class	Class
1	1	4	2
1	1	4	2
1	1	4	2
0	0	3	3
0	0	3	2
0	0	3	3
0	0	3	3
0	0	4	2

Visita nuestro blog

Ideas para tu espacio

Ir ahora ►

GLEAMOROUS 314




CARE & MAINTENANCE



1. Wipe gently with a wet sponge.
2. Vacuum clean for regular maintenance.
3. Hand wash with lukewarm water and a mild detergent solution.
4. Do not wring dry.
5. Do not bleach.
6. Do not dry clean nor use steam cleaning.


APPLICATIONS

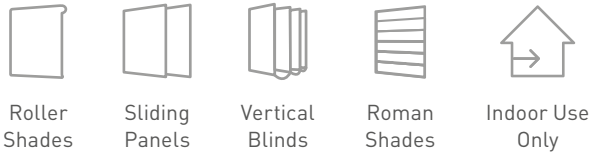

MANUFACTURING



OTHER BENEFITS

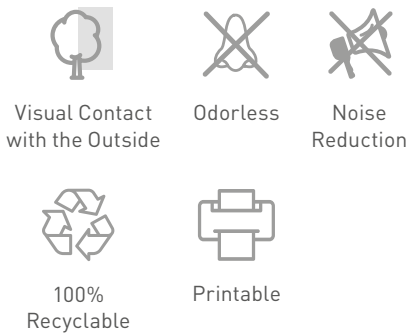

INTERNATIONAL CERTIFICATIONS



Polyscreen Vision® fabrics are covered by a 10-Year Warranty when installed indoors. Also, the **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

Visita nuestro blog

Ideas para tu espacio

Ir ahora ►



THE ROLLUX BOOK

COLECCIÓN VISION

Vertilux México



Copyright © 2021. Todos los derechos reservados.

THE ROLLUX BOOK

COLECCIÓN VISION



Queda prohibida la reproducción y/o edición parcial o total de este documento, ya sea en medios electrónicos, fotocopiado, escaneado o cualquier otro, sin el permiso previo y por escrito de Vertilux, así como Vertilux no se hace responsable por el mal uso de nuestro catálogo digital, el uso de copias en tejidos, mecanismos y perfiles de aluminio que no están avalados por la marca y todo uso de componentes ajenos invalida cualquier garantía parcial o total.

Copyright © 2021. Todos los derechos reservados.



THE ROLLUX BOOK

Tejidos para persianas enrollables

COLECCIÓN SHEERLUX

THE ROLLUX BOOK

COLECCIÓN SHEERLUX

222 SHEERLUX AYRE-RHAPSODY

234 SHEERLUX MADRIGAL

226 SHEERLUX ALLEGRO

240 SHEERLUX ADAGIO

230 SHEERLUX SYMPHONY

5
MODELOS

14
COLORES

Todos nuestros distribuidores trabajan con tejidos, componentes y motores VERTILUX si alguien te ofrece un producto diferente al que deseas o un producto que no es VERTILUX repórtalo, la satisfacción de nuestros clientes es primero.



SHEERLUX AYRE-RHAPSODY

URBAN-CHIC


COLECCIÓN SHEERLUX

AYRE-RHAPSODY



AYRE WHITE 0-002-A3-01110

AYRE-RHAPSODY

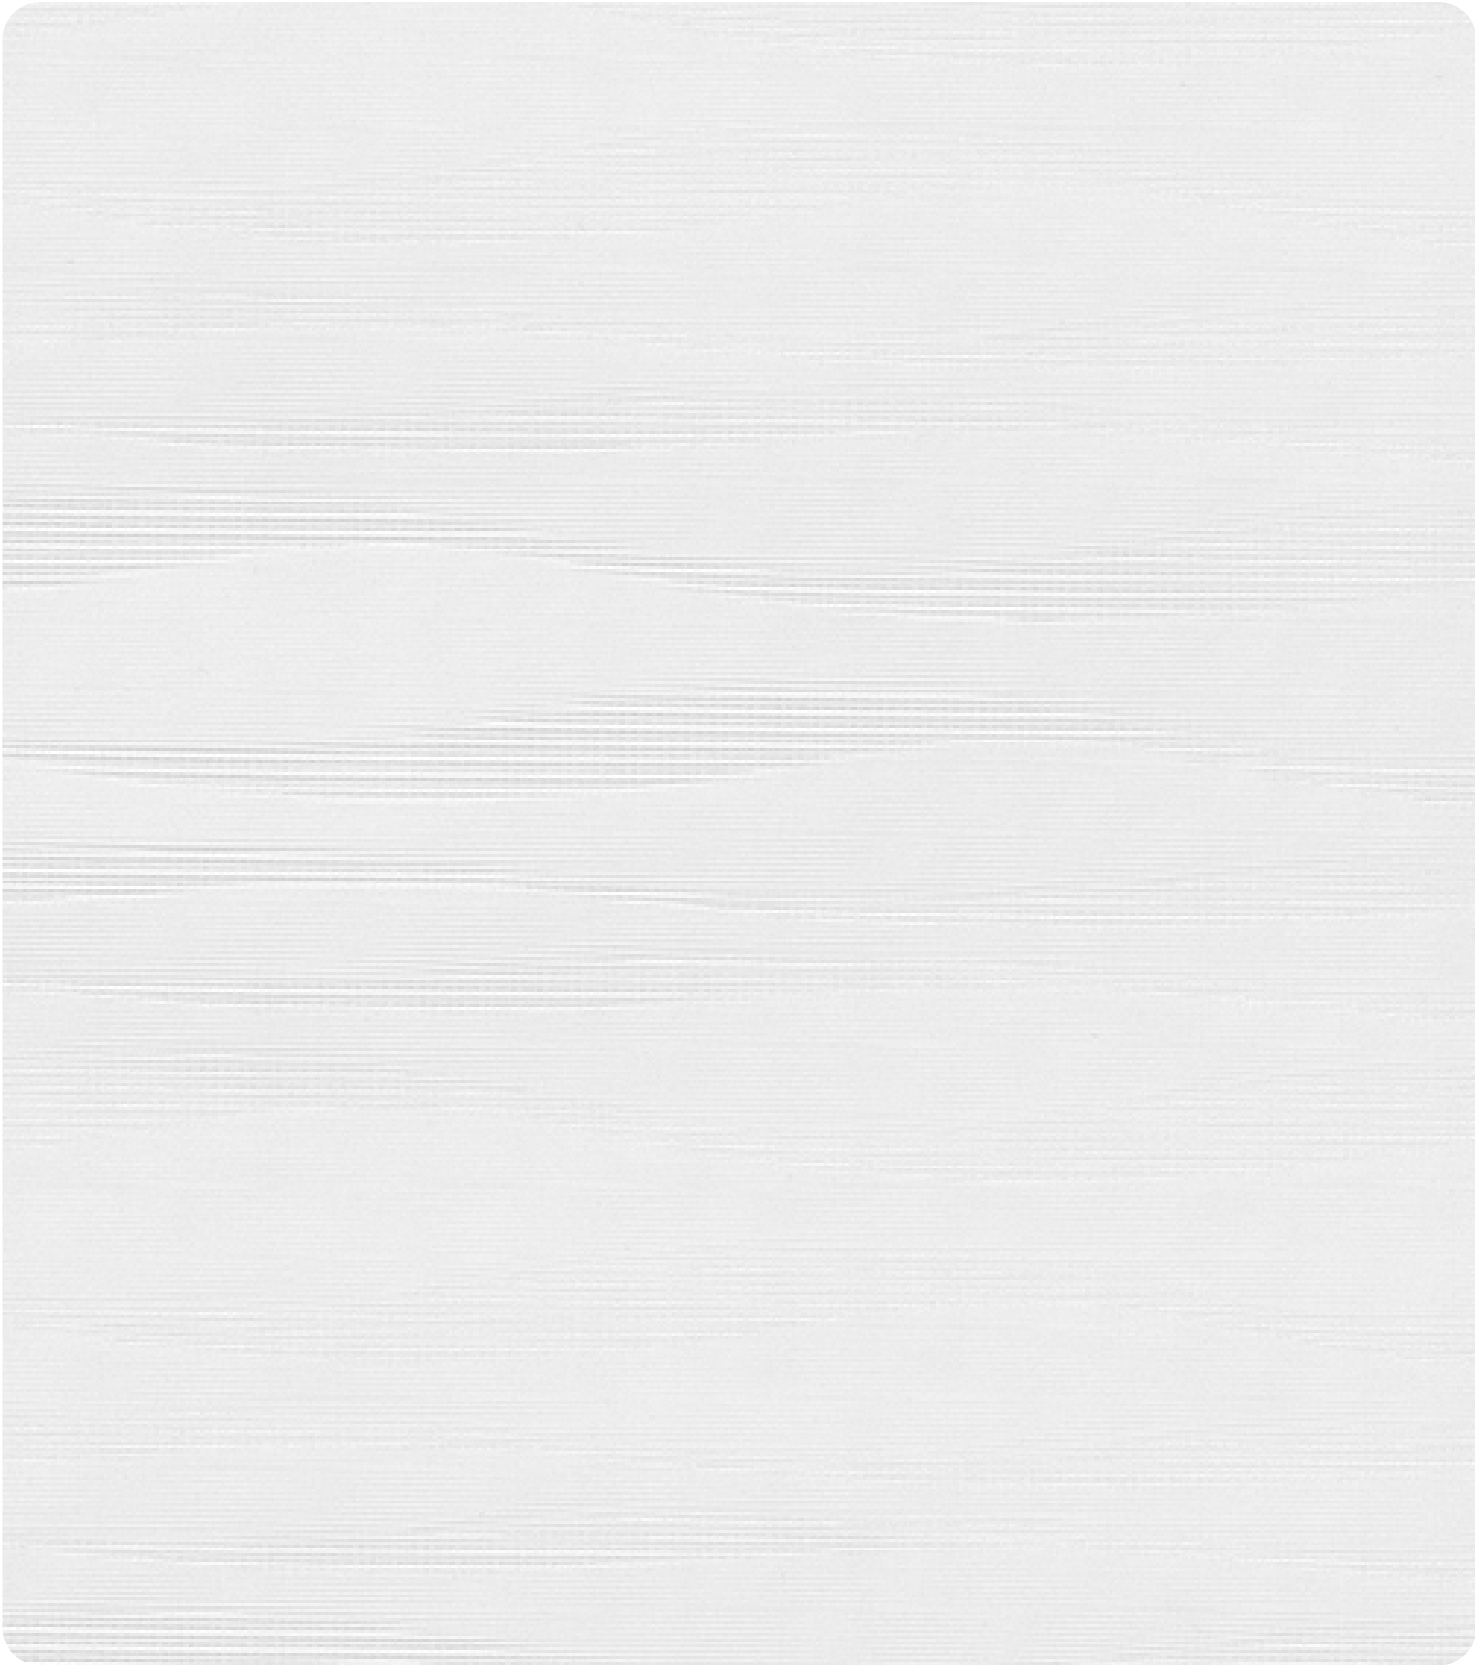

RHAPSODY WHITE 0-002-A5-01110



URBAN-CHIC
SHEERLUX
AYRE-RHAPSODY

TECHNICAL PROPERTIES

	AYRE	RHAPSODY
Composition	100% PES	100% PES
Weight	60 g/m² ± 5% 1.77 oz/yd² ± 5%	57 g/m² ± 5% 1.68 oz/yd² ± 5%
Thickness	0.20 mm ± 5% 0.008 in ± 5%	0.16 mm ± 5% 0.006 in ± 5%
Roll Width	2.8 m 110 in	2.8 m 110 in
Light Fastness	7 Xenotest Grade	8 Xenotest Grade

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



- 1. Vacuum clean for regular maintenance.
- 2. Do not wash.
- 3. Do not wring dry.
- 4. Do not bleach.
- 5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

MANUFACTURING



- Use Only on Roll Direction
- Ultrasonic Cut NOT Required

APPLICATIONS



- Roller Shades
- Duo Roller Shades
- Sliding Panels
- Indoor Use Only

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶




SHEERLUX ALLEGRO

URBAN-CHIC


COLECCIÓN SHEERLUX

ALLEGRO

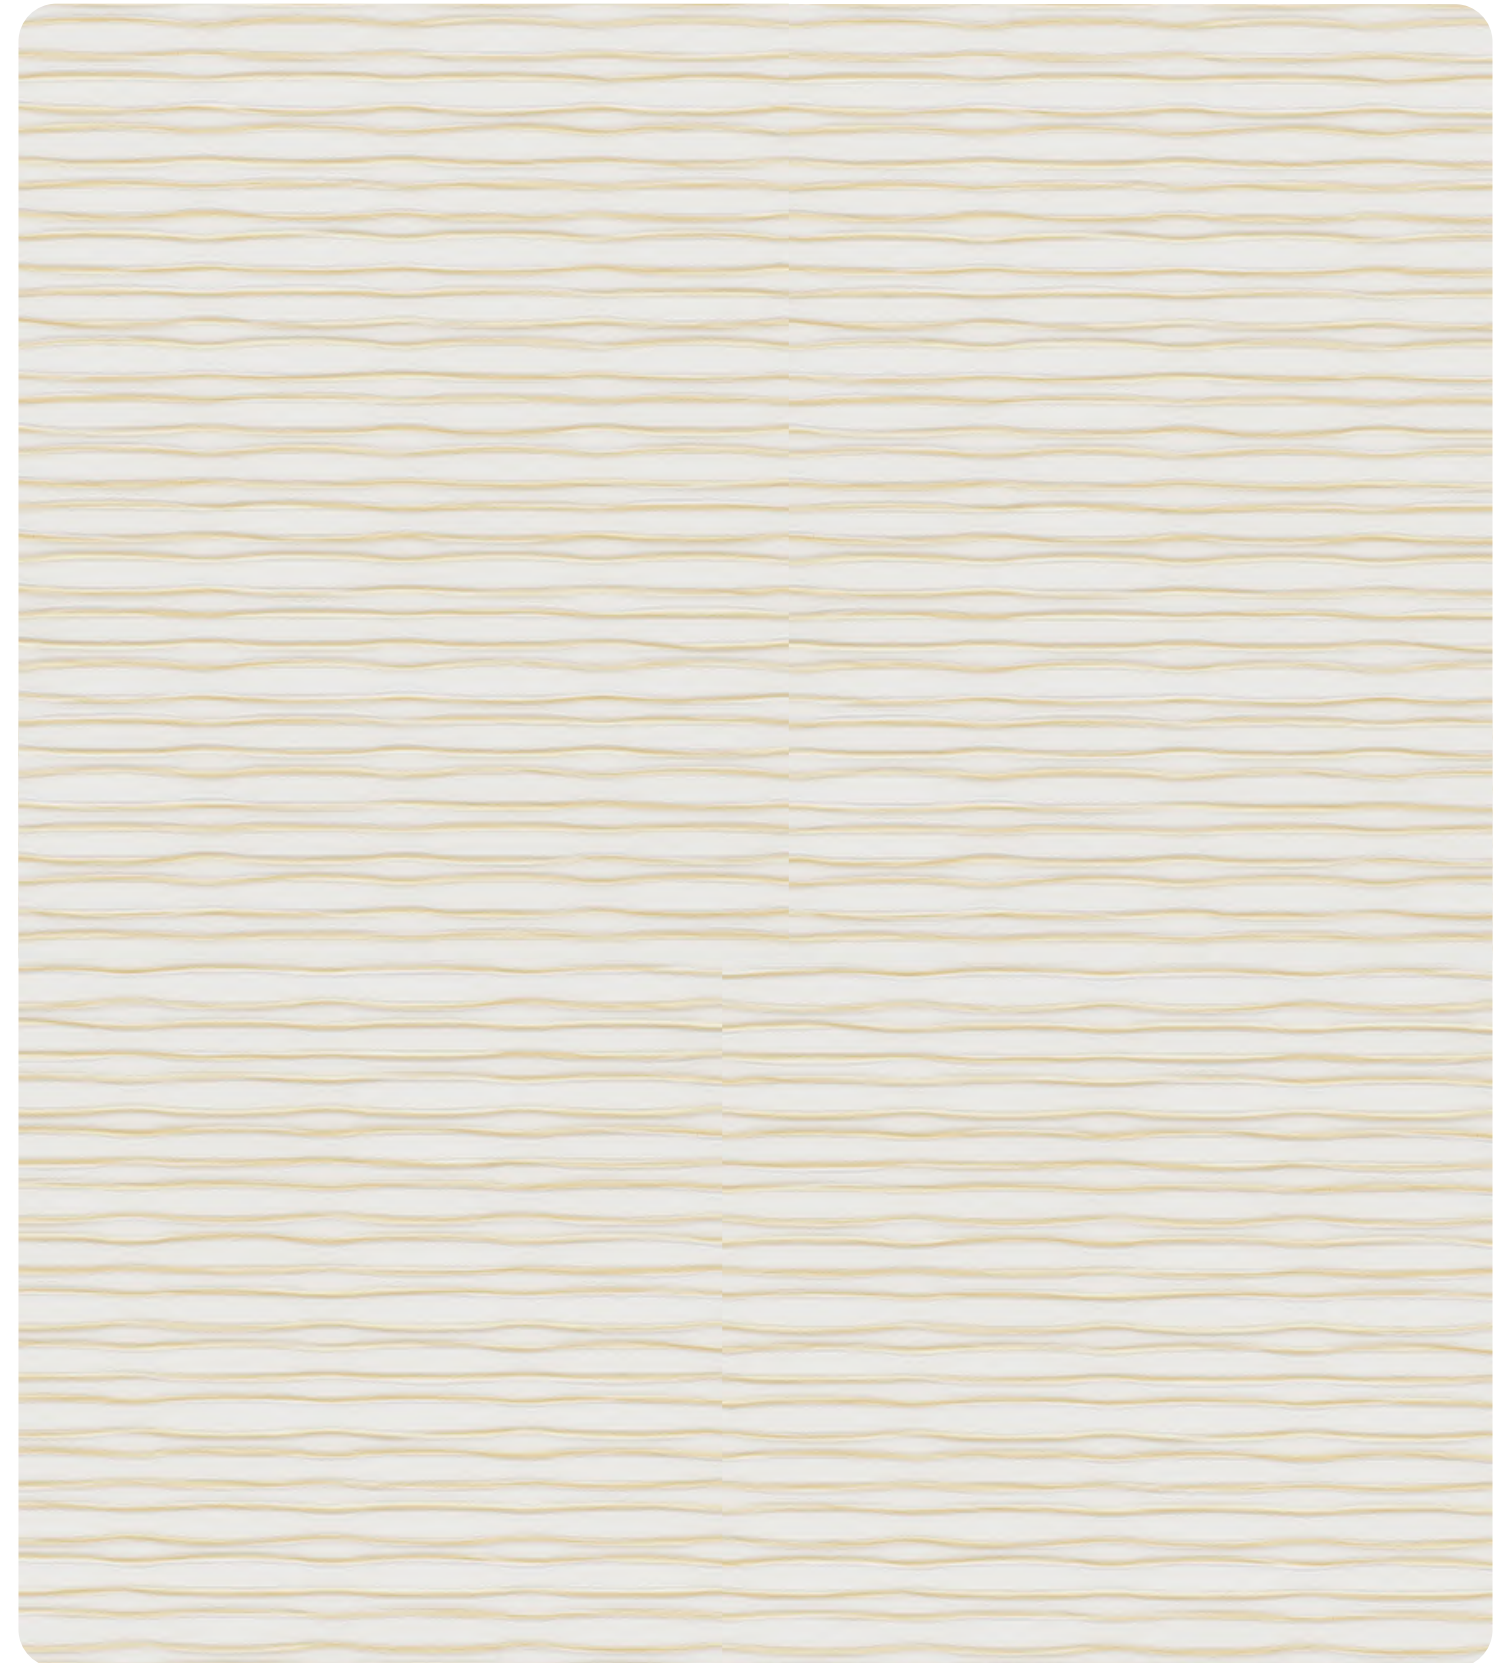

IVORY 0-002-A1-02110

ALLEGRO

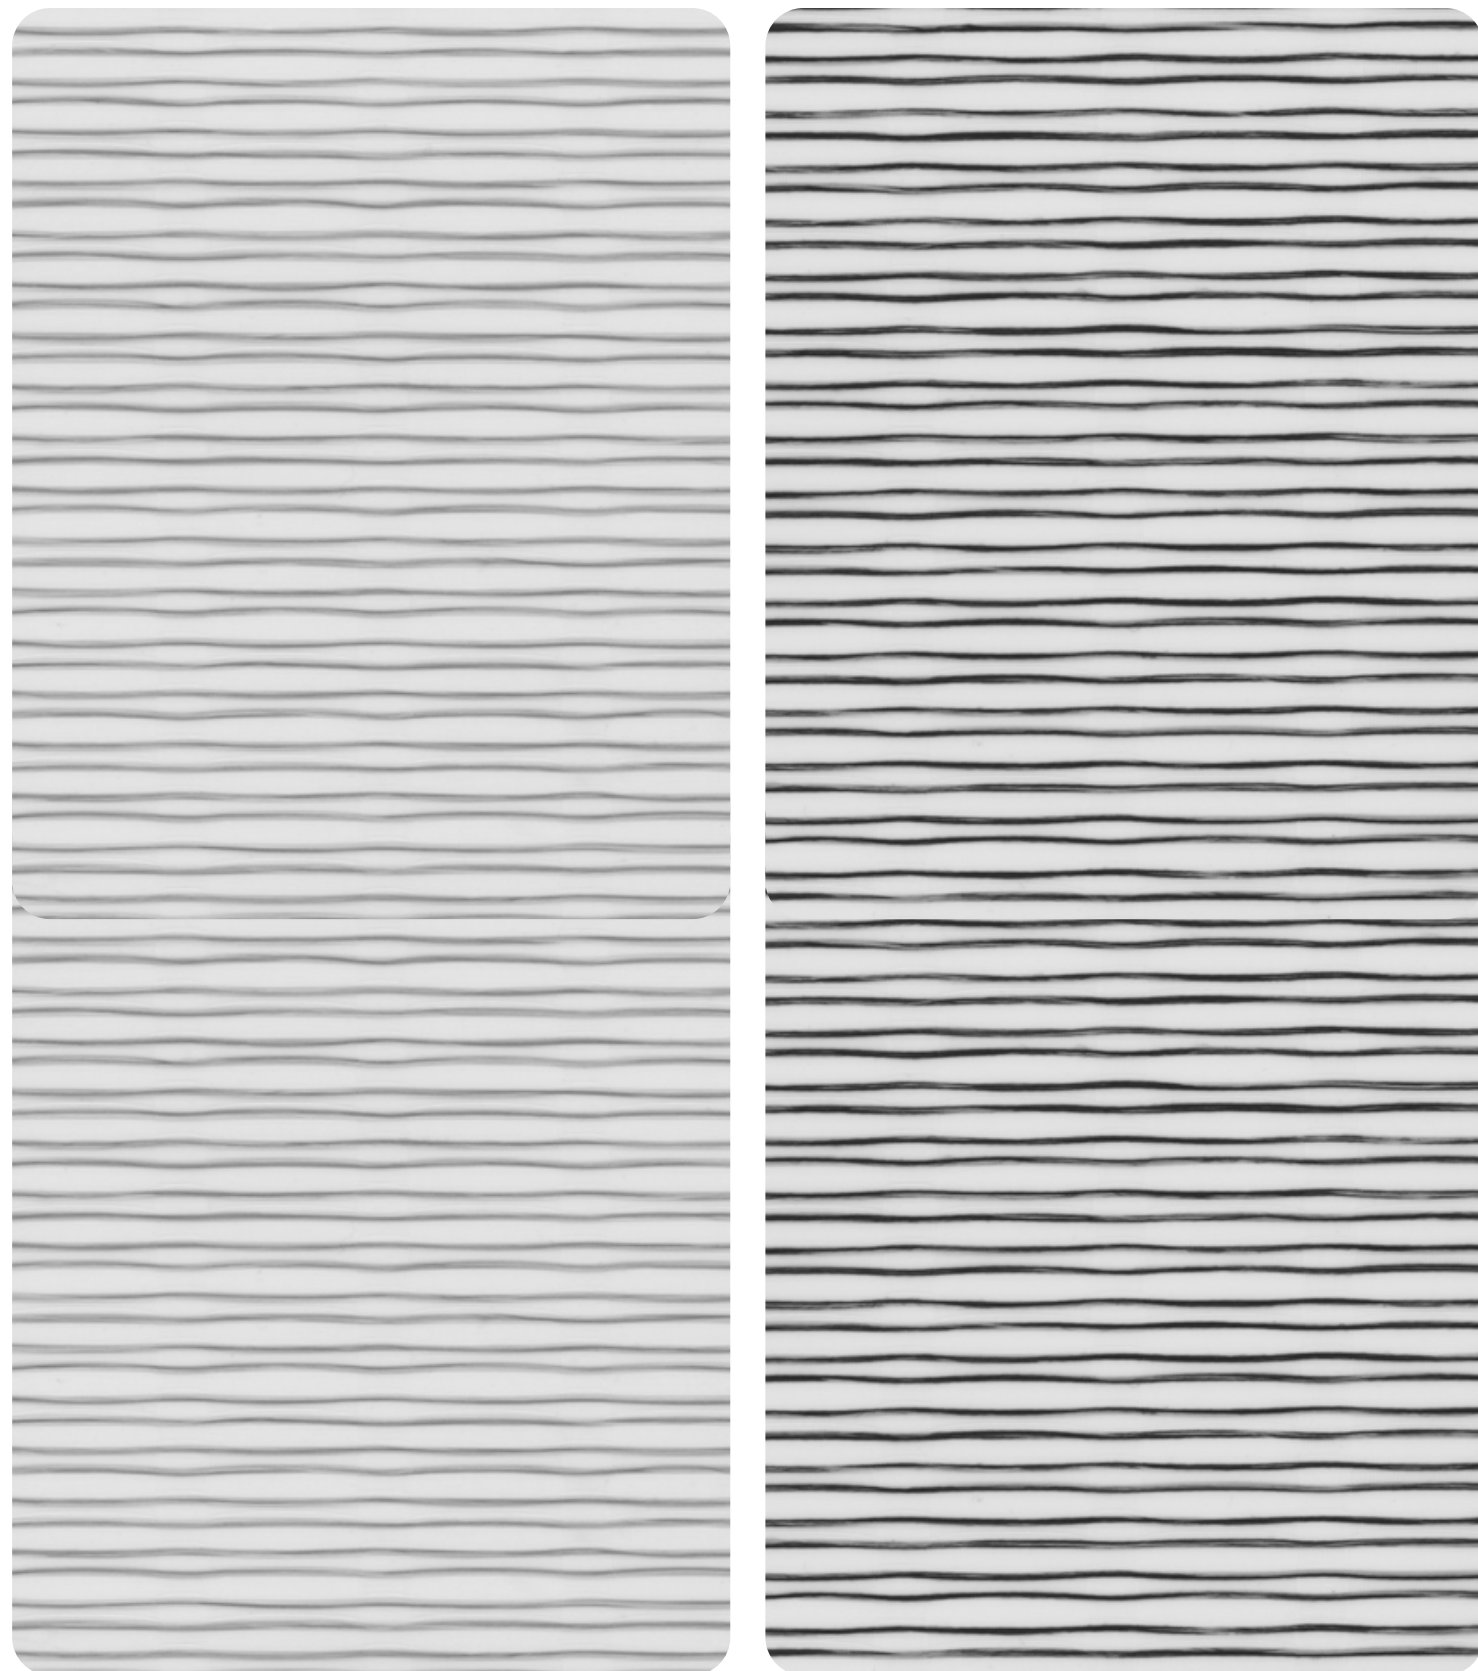

GREY 0-002-A1-03110

BLACK 0-002-A1-04110

URBAN-CHIC
SHEERLUX
ALLEGRO

TECHNICAL PROPERTIES

Composition	100% PES
Weight	71 g/m ² ± 5% 2.09 oz/yd ² ± 5%
Thickness	0.33 mm ± 5% 0.013 in ± 5%
Roll Width	2.8 m 110 in
Light Fastness	6/7 Xenotest Grade

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

MANUFACTURING



Use Only on
Roll Direction

Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades

Duo Roller
Shades

Sliding
Panels

Indoor Use
Only

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶



SHEERLUX SYMPHONY

URBAN-CHIC


COLECCIÓN SHEERLUX

SYMPHONY



IVORY 0-002-A2-01110

SYMPHONY

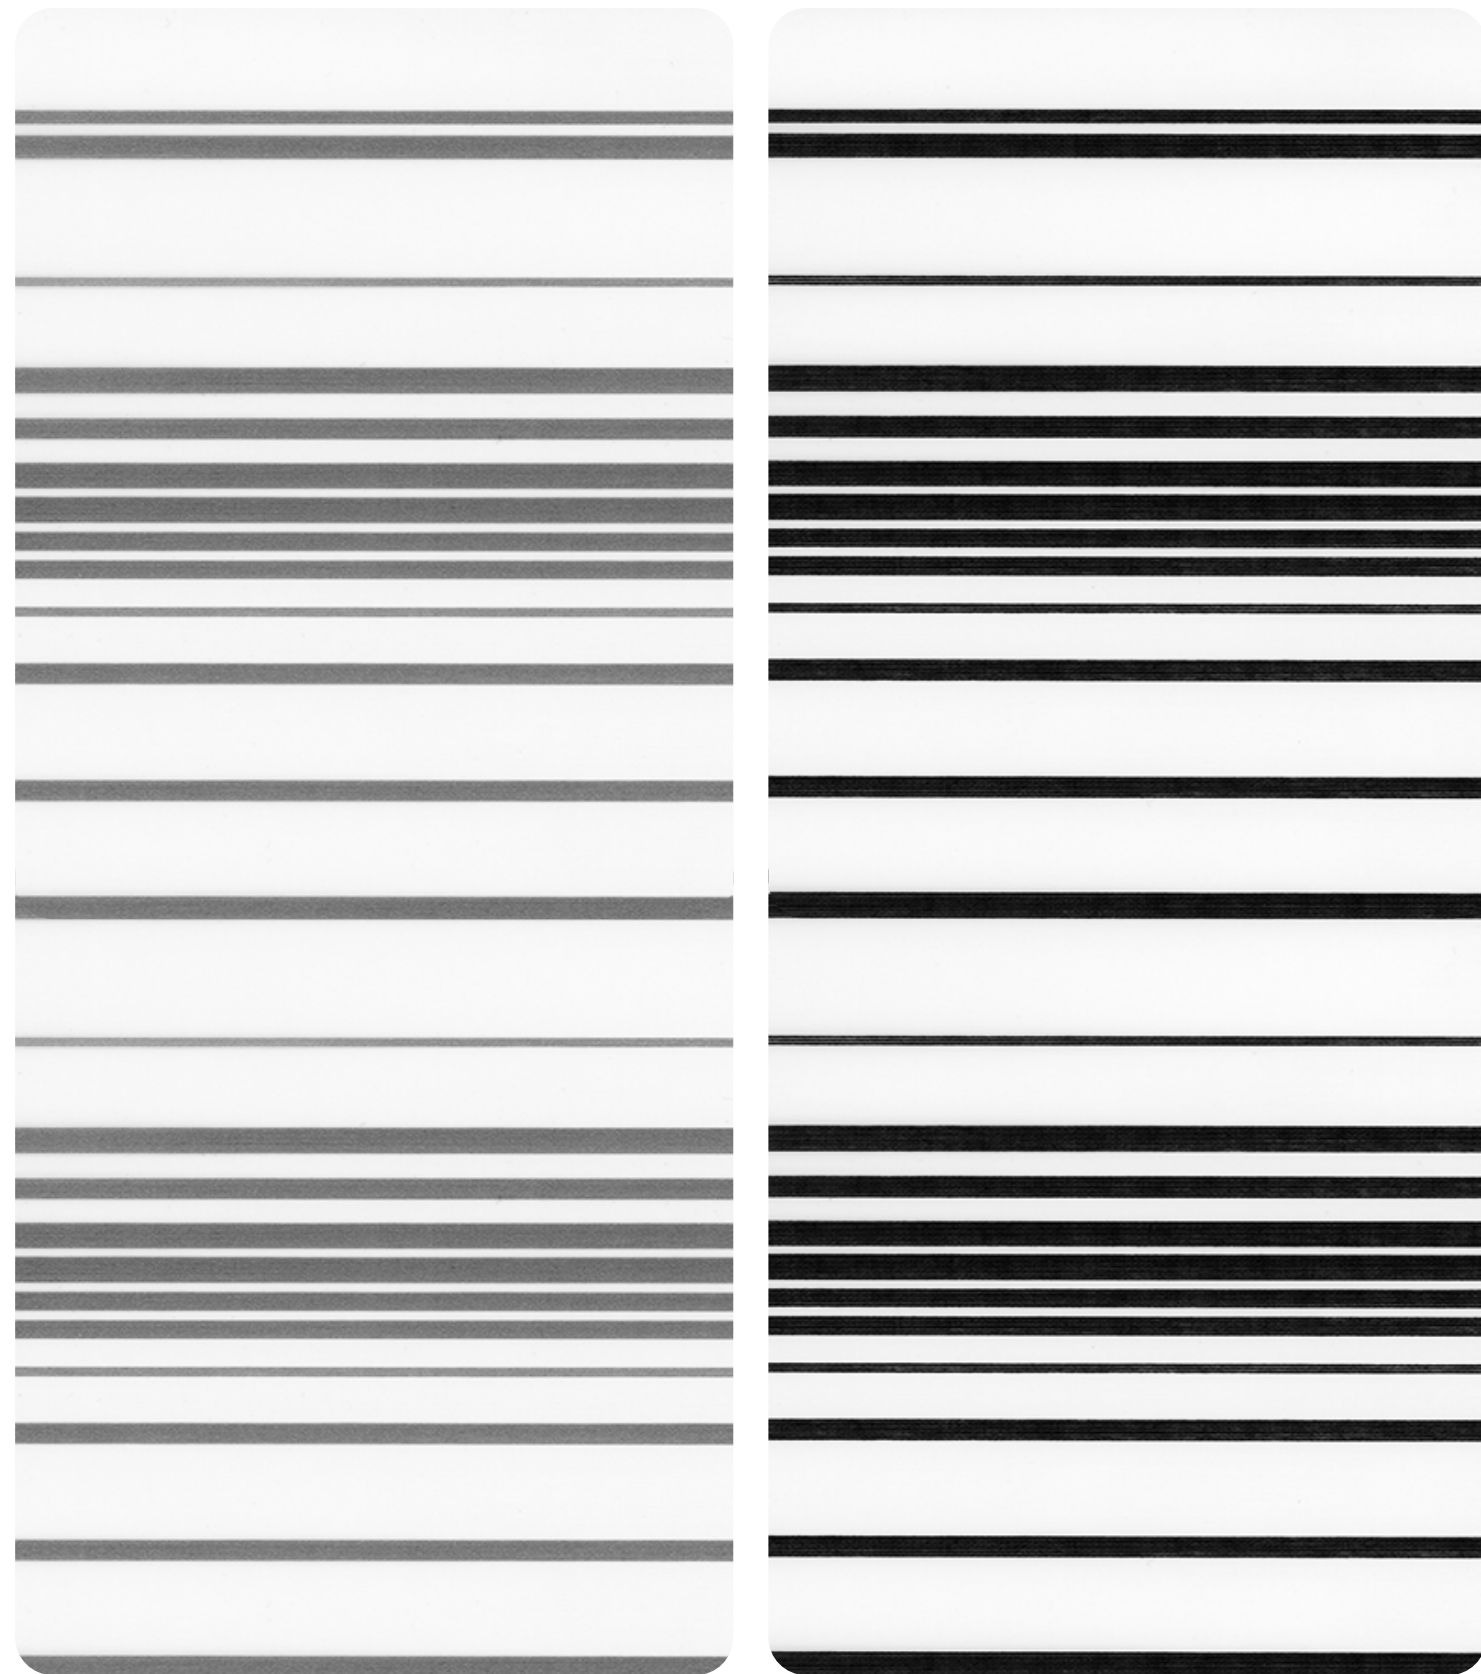

GREY 0-002-A2-03110

BLACK 0-002-A2-06110

URBAN-CHIC
SHEERLUX
SYMPHONY

TECHNICAL PROPERTIES

Composition	100% PES
Weight	53 g/m ² ± 5% 1.56 oz/yd ² ± 5%
Thickness	0.20 mm ± 5% 0.008 in ± 5%
Roll Width	2.8 m 110 in
Light Fastness	6-7/8 Xenotest Grade

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.


MANUFACTURING



Use Only on
Roll Direction

Ultrasonic Cut
NOT Required

APPLICATIONS

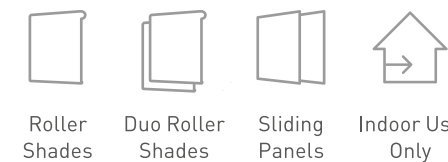

Visita nuestro blog

Ideas para tu espacio

Ir ahora ▶



SHEERLUX MADRIGAL

URBAN-CHIC

COLECCIÓN SHEERLUX

MADRIGAL




IVORY 0-002-A4-01110

MADRIGAL



BEIGE 0-002-A4-02110

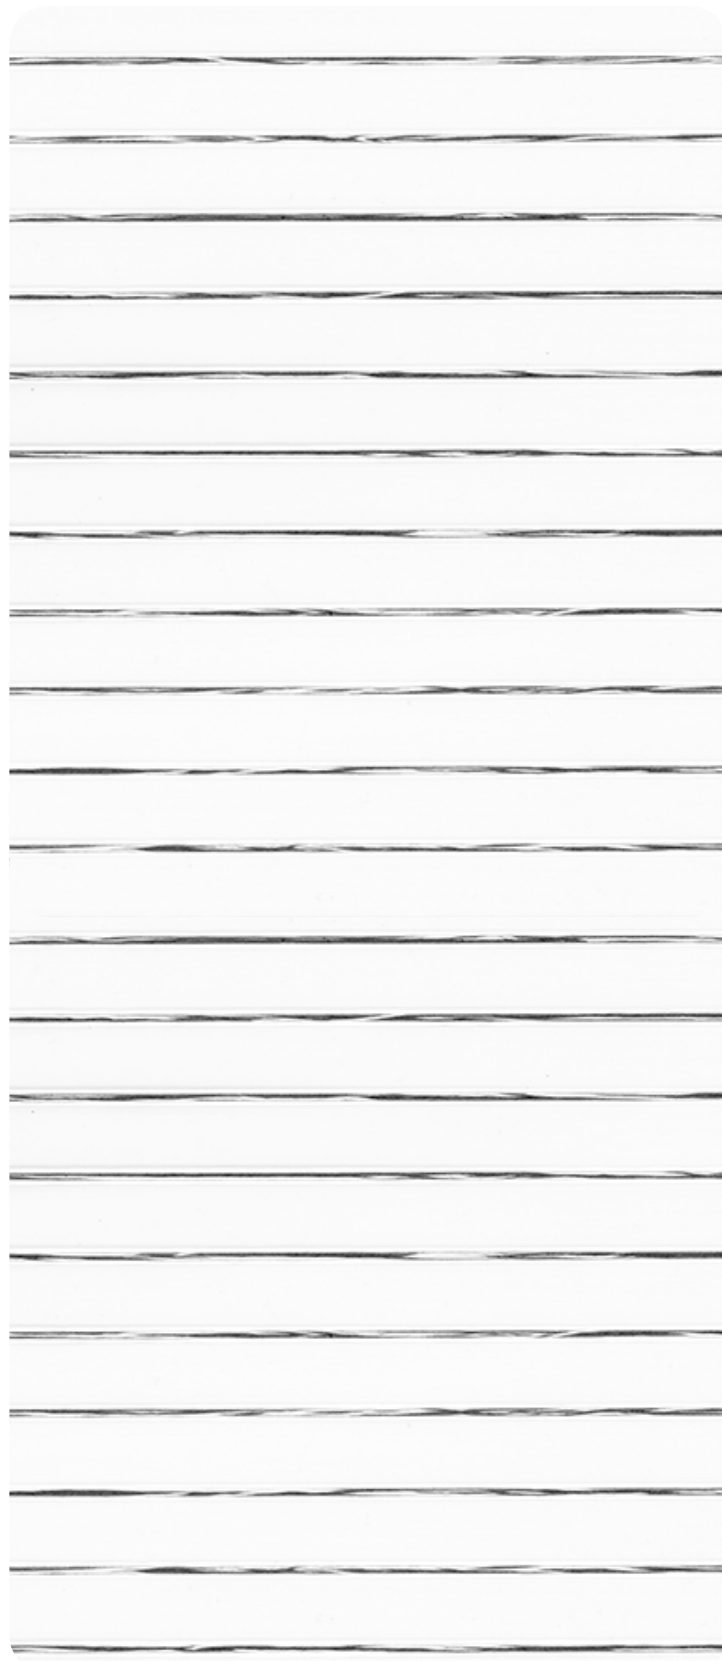

GREY 0-002-A4-03110

MADRIGAL



BEIGE 0-002-A4-05110

URBAN-CHIC SHEERLUX MADRIGAL



TECHNICAL PROPERTIES

Composition	100% PES
Weight	66 g/m ² ± 5% 1.95 oz/yd ² ± 5%
Thickness	0.39 mm ± 5% 0.015 in ± 5%
Roll Width	2.8 m 110 in
Light Fastness	7/8 Xenotest Grade

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

MANUFACTURING



Use Only on
Roll Direction

Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades

Duo Roller
Shades

Sliding
Panels

Indoor Use
Only

Visita nuestro blog

Ideas para tu espacio

[Ir ahora ▶](#)



THE ROLLUX BOOK

COLECCIÓN SHEERLUX

Vertilux México





SHEERLUX ADAGIO

URBAN-CHIC

COLECCIÓN SHEERLUX

ADAGIO



IVORY 0-002-A6-02110

ADAGIO



GREY 0-002-A6-03110

URBAN-CHIC
SHEERLUX
ADAGIO

TECHNICAL PROPERTIES

Composition	100% PES
Weight	117 g/m ² ± 10% 3.45 oz/yd ² ± 10%
Thickness	0.44 mm ± 5% 0.017 in ± 5%
Roll Width	2.8 m 110 in
Light Fastness	5/6 Xenotest Grade

*Performance evaluations conducted by independent laboratories.

CARE & MAINTENANCE



1. Vacuum clean for regular maintenance.
2. Do not wash.
3. Do not wring dry.
4. Do not bleach.
5. Do not dry clean nor use steam cleaning.

INTERNATIONAL CERTIFICATIONS



The **Vertilux Collection** has all of the most important certificates in the industry. However, different certificates apply for different fabrics in our collection. Please ask our Customer Service Department about the certificates available for specific fabric patterns.

IMPORTANT: The values and recommendations in this card are not contractual and can not be used as claim for order cancellations or returns. This technical data may vary at any time without previous notice. Color samples may not necessarily be an exact match of the material to be used to produce your order. Returns will not be accepted due to minor variations of color or texture.

MANUFACTURING



Use Only on
Roll Direction

Ultrasonic Cut
NOT Required

APPLICATIONS



Roller
Shades

Duo Roller
Shades

Sliding
Panels

Indoor Use
Only

Visita nuestro blog

Ideas para tu espacio

Ir ahora ►

Blackout

Decorative

Vision

Sheerlux

INICIO



THE ROLLUX BOOK

vertilux.mx

THE ROLLUX BOOK

COLECCIÓN SHEERLUX




VERTILUX
IDEAS PARA TU ESPACIO

Queda prohibida la reproducción y/o edición parcial o total de este documento, ya sea en medios electrónicos, fotocopiado, escaneado o cualquier otro, sin el permiso previo y por escrito de Vertilux, así como Vertilux no se hace responsable por el mal uso de nuestro catálogo digital, el uso de copias en tejidos, mecanismos y perfiles de aluminio que no están avalados por la marca y todo uso de componentes ajenos invalida cualquier garantía parcial o total.

Copyright © 2021. Todos los derechos reservados.